



JOHN ANDERSON, Jr. Governor
 RICHARD C. BYRD Chairman
 ALVIN F. GRAUERHOLZ Commissioner
 HARRY G. WILES Commissioner
 RAYMOND B. HARVEY Secretary
 CHARLES C. McCARTER Gen. Counsel

State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)
 500 Insurance Bldg. 212 N. Market
 WICHITA, KANSAS

VERBAL PERMIT FORM
 (To Be Filed By Plugging Agent)

RECEIVED
 STATE CORPORATION COMMISSION

OCT 29 1963

CONSERVATION DIVISION
 Wichita, Kansas

J. P. Roberts
 Assistant Director
 500 Insurance Building
 212 North Market
 Wichita 2, Kansas

Dear Sir:

Mr. Kuhn of Walter Kuhn Drilling Co. has this date requested permission to plug the following described well:

Mr. Kuhn guarantees payment of the plugging fee.

Operator's full Name: Walter Kuhn Drilling Co.

Complete Address: 726-28 Union Center Bldg. Wichita, Kansas

Lease Name: Masoner Well No. # 1

Location: SW/4 SW/4 Sec. 30 Twp. 28 Rge. 32 (E) (W)

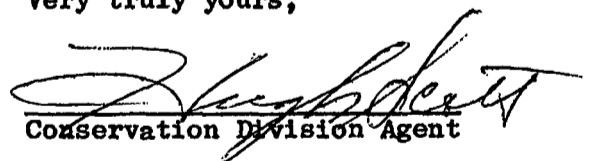
County Haskell Total Depth 5289' Oil Well X

Gas Well Input Well SWD Well D & A Lost Hole

Mr. Kuhn was instructed to plug the well as follows:

8 5/8"-2400' Circulated w/cement. 5 1/2"-5389' Cemented. Perforations-5325'
5353'
Plug bottom w/15 Sax.cement 5389' to 5274' Mud 5274' to 2400'
Spotted 15 Sax.cement 2400' to 2285' Mud 2285' to 700'
Spotted 35 Sax.cement 700' to 600' Mud 600' to 50'
Rock bridge 50' to 40' 15 Sax.cement, 40' to 0

Very truly yours,


 Conservation Division Agent