

Kiowa


KANSAS

SECTION 11 TOWNSHIP 29 RANGE 16 W

WELL NO. #1 Howell "A"

COMPANY W. G. Schafer Drlg.

NORTH

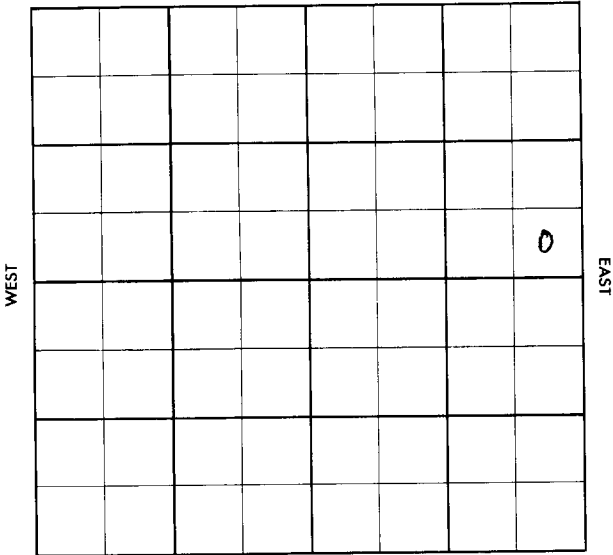

SOUTH

SEC.	TWP.	R.
11	29 S	16 W

WELL NO.

#1 -A Howell

FARM

COMPANY

Schafer Drilling Co.

CONTRACTOR

Co. tools


Wildcat

Ft. from N. Line

Ft. from S. Line

Ft. from E. Line

Ft. from W. Line



SE SE NE

SDX DHC \$3,000.00

Lse.(MCPC #15922A)

Gulf & Imperial support

WILLI

	ELEVATION	REPORT
1955	2024' DF	(WH5-DC62)
10/19	Mississippi Lime test well-@4800' (See DHC Ltr. 10-18-55)	
11/16	Location	(F.R. Tkt)
11/16	Staking location. Digging pits. Moving.	(Card-Schafer & Co)
11/26	Spud 11-25-55 Set 450' w/275 sks. cement.	"
11/28	Drlg. 1920' Anhydrite 885-915' (Card-Schafer & Co)	"
11/29	Drlg. 2280'	"
11/30	Drlg. 2540'	"
12/1	Drlg. 2795'	"
12/2	Drlg. 2821'	"
12/3	Drlg. 2850'	"
12/5	Drlg. 3410'	"
12/6	Drlg. 3675'	"
12/7	Top Heebner 2914' Top Douglas 3962'	
12/8	Taking DST 3936-82' (Tel-Schafer Drlg. DST #1, 3936-3982', open 1 hr, weak blow thruout, rec 170' muddy SW. SI 15". BHP 1440# IFP 60#. FFP 120# Drlg. 4155' (Card-Schafer & Co)	

1955
 12/9 Top of Brown lime 4070'
 Top of Lansing 4085'
 Drlg. 4305' (Card-Schafer ϕ)
 12/10 TD 4450' "
 12/12 DST #2, Mississippi Sand, rec 35' mud.
 TD 4673'. (Card-Schafer Drlg.)
 12/15 Received Radioactivity Log and
 Well Plugging Record from Schafer
 Drlg. Co.
 12/21 Received Radioactivity Log
 from Schafer Drlg. Co.
 12-14 DST 4588-4601 op 1 hr. rec. 40' mud,
 710/30"
 DST 4600-30 op 1 hr. rec. 35' vsocm,
 0/30"
 DST 4629-78 op $\frac{1}{2}$ hr. rec. 10' mud, 0/15'
 D & A
 M. 4586- 4584
 K. 4656 - 4648
 TD 4678'

ABANDONED

County **Kiowa**

Elev.

Sec. **11**

Twp.

29

Rge.

16W

Company

W. G. Schafer Drlg.

Farm Name

Howell "A"

No.

1

TOPS	DEPTH	LOG	DATUM	Loc. in Sec.
Anb.				SE SE NE
Tp.				
H.				
Tr.				
Dg.				
BL.				
L.				Geol.
K.C.				Contr.
B.K.C.				Co. tools
Ce.				Pool
C.				Wildcat
M.				
M.				
K.				
Mz.				
Me.				
V.				
S.				
S.				
A.				
R.				
Pe.				
G.				
T.D.				

NOV 16 1955

FIRST REPORT

Date Comm. **Gulf, Sunray Mid-Cont. & Imperial**
Location **support**

County Xiowa Elev. 2004
 Sec. 11 Twp. 29 Rge. 16W
 Company W. G. Schafer Drlg.
 Farm Name Howell "A" No. 1

TOPS	DEPTH	LOG	DATUM	Loc. in Sec.
Anh.	<u>885-915</u>			<u>SE SE NE</u>
Tp.				
H.	<u>3914</u>	<u>3914</u>	<u>1910</u>	
Tr.				
Dg.	<u>3962</u>		<u>1958</u>	
Bl.	<u>4070</u>	<u>4068</u>	<u>2069</u>	
L.	<u>4085</u>	<u>4083</u>	<u>2079</u>	
K.C.				Geol.
B.K.C.				Contr.
Ce.				<u>Co. tools</u>
C.				Pool
M.	<u>4586</u>	<u>4584</u>	<u>2580</u>	<u>Wildcat</u>
M.				
K.	<u>4656</u>	<u>4648</u>	<u>2644</u>	
Mz.				
Me.				
V.				
S.				
S.				
A.				
R.				
Pe.				
G.				
T.D.	<u>4678</u>	<u>4676</u>		ABANDONED

Date Comm. 11-25-55 DEC 14 1955
8 5/8" @ 450/275 DST 3936-82

open 1 hr. rec. 170' msw 1140/15"
 DST 4588-4601 open 1 hr. rec. 40' mud
 710/30" DST 4600-30 open 1 hr.
 rec. 35' vsocm 0/30" DST 4629-78
 open 1/2 hr. rec. 10' mud 0/15"

D & A