


DX 78-1

Kingman KANSAS

Section 15 Township 29 Range 9W

Well No. 1 Schwartz

Company C S O

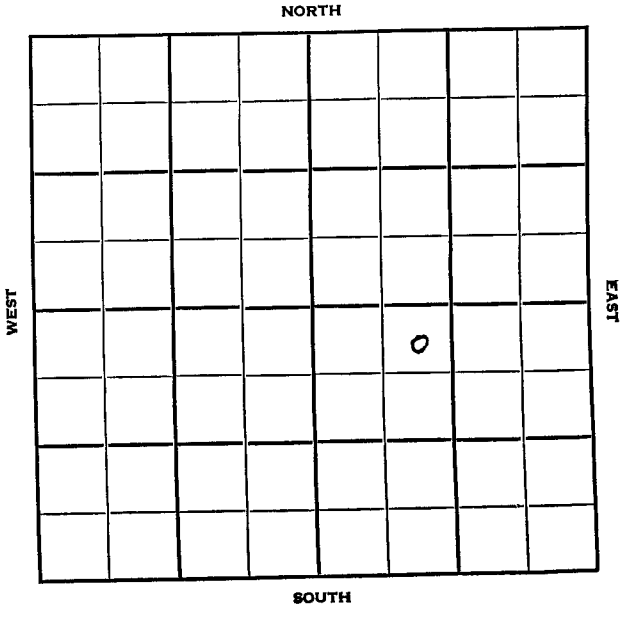

SEC. 15	TWP. 29	R. 9W
------------	------------	----------

WELL NO.

1 Schwartz

FARM

COMPANY

CSO

CONTRACTOR

Prime Drlg.


Willowdale Pool

330 Ft. from N. Line

Ft. from S. Line

Ft. from E. Line

990 Ft. from W. Line



NE NW SE

	ELEVATION	REPORT
1954	1695'	

9/22 Spud 9-17-54  
8" @ 309' w/225 sks  
Drlg. 2330'

11/3 Spud 9-17-54 - Oil Well  
TD 4530'  
8" @ 309'  
Heeb 3347', Dodge 3362', Doug 3375',  
Lans 3556', Miss 4210'  
DST 4211-26', opn 1 hr., gas in 9",  
rec. 440' GCM, 75' mud & SW, 1397#  
Kh. 4322', Viola 4500'  
DST 4501-04', opn 1 hr., gas in 37",  
rec. 295' SMC0, 1588#  
DST 4504-30', opn 1 hr., gas in 42",  
rec. 102' SOCM, 186' MCO, 146' oil,  
102' SW, 1590#  
TD 4530'  
5" @ 4530'  
CO to 4514  
13/449-4502'  
P/55 bo 22 bw  
P/42 bo 13 bw 24 hrs.  
Comp. 82 bopd 32% wtr.

COMPLETED



County Kingman State Kansas

Sec. 15 (Blk. 29) (Sur. 9W) Map No.             
 (Twp.) (Rge.)

Operator Cities Service

Well No. 1 Farm Schwartz

Elev. 1695 Location NE NW SE


330 Ft. From N Line SE

990 Ft. From W Line Quarter

1st. Report

Completion NOV 3 1954

Remarks Willowdale Pool

Prime Drlg. - Contr.

Spudding Date 9-17-54

Drlg. Data Oil well TD 4530

8" C 309 Heeb. 3347 Dodge 3362

Doug. 3375 Lans. 3556 Miss. 4210

DST 4211-26 open 1 hr. gas in 9 min.

Rec. 440' gcm 75' mud & sw 1397#

Kh. 4322 Viola 4500 DST 4501-04

open 1 hr. gas in 37 min. Rec. 295' smc

1588# DST 4504-30 open 1 hr. gas in

42 min. Rec. 102' socm 186' mco

146' oil 102' sw 1590# TD 4530

5" C 4530 CO to 4514 13/ 4499-4502

P/ 55 bo 22 bw P/ 42 bo 13 bw 24 hr.

Comp. 82 hcpd 32% wtr.

FABEN GILSTRAP