


FORMATION

TEST

REPORT

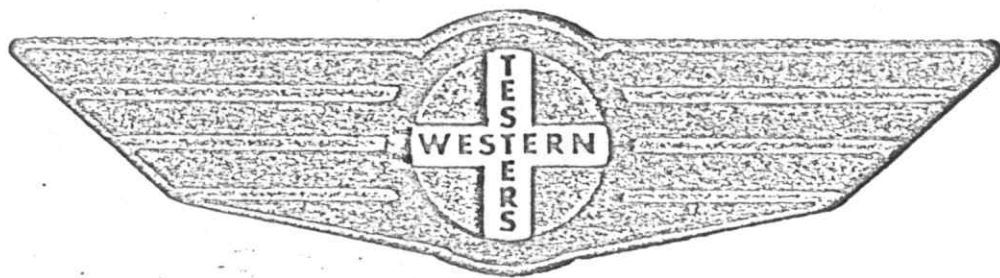

Home Office:

Wichita, Kansas 67201

P.O. Box 1599

Phone (316) 262-5861

Company VINCENT OIL CORPORATION Lease & Well No. #2 HLEBSCH Sec. 41 Twp. 47S Rge. 10W Test No. 1 Date 3/22/03

WESTERN TESTING CO. INC.
SUBSURFACE PRESSURE SURVEY

DATE: 5-25-85
CUSTOMER: VINCENT OIL CORPORATION
WELL: 2 TEST: 1
ELEVATION (KB): 2176 FORMATION: MARMATON
SECTION: 27 TOWNSHIP: 29S
RANGE: 18W COUNTY: KIOWA STATE: KANSAS
GAUGE SN #13402 RANGE: 4025 CLOCK: 12

INTERVAL TEST FROM: 4745 FT TO: 4840 FT TOTAL DEPTH: 4840 FT
DEPTH OF SELECTIVE ZONE: FT
PACKER DEPTH: 4740 FT SIZE: 6 3/4 IN PACKER DEPTH: 4745 FT SIZE: 6 3/4 IN
PACKER DEPTH: FT SIZE: IN PACKER DEPTH: FT SIZE: IN

DRILLING CONTRACTOR: H-30 DRLG. RIG #12
MUD TYPE: CHEMICAL VISCOSITY: 40
WEIGHT: 9.2 WATER LOSS (CC): 12.0
CHLORIDES (P.P.M.): 6000
JARS - MAKE: SERIAL NUMBER:
DID WELL FLOW? NO REVERSED OUT? NO
DRILL COLLAR LENGTH: 330 FT I.D.: 2.25 IN
WEIGHT PIPE LENGTH: FT I.D.: IN
DRILL PIPE LENGTH: 4393 FT I.D.: 3.8 IN
TEST TOOL LENGTH: 22 FT TOOL SIZE: 5 1/2 OD IN
ANCHOR LENGTH: 95 FT SIZE: 5 1/2 OD IN
SURFACE CHOKE SIZE: 3/4 IN BOTTOM CHOKE SIZE: 3/4 IN
MAIN HOLE SIZE: 7 7/8 IN TOOL JOINT SIZE: 4 1/2 XH IN

BLOW: STRONG GTS 2 MINUTES.

RECOVERED: 480 FT OF: GASSY OIL (APPROX. 53 DEGREES GRAVITY).
RECOVERED: 300 FT OF: GASSY OIL CUT MUD (40% MUD; 20% OIL; 40% GAS).
RECOVERED: FT OF:
RECOVERED: FT OF:
RECOVERED: FT OF:
RECOVERED: FT OF:
RECOVERED: FT OF:
RECOVERED: FT OF:
RECOVERED: FT OF:
RECOVERED: FT OF:

REMARKS: SEE ATTACHED GAS FLOW REPORT.

TIME SET PACKER(S): 1:00 PM TIME STARTED OFF BOTTOM: 4:00 PM
WELL TEMPERATURE: 122 °F
INITIAL HYDROSTATIC PRESSURE: (A) 2322 PSI
INITIAL FLOW PERIOD MIN: 30 (B) 490 PSI TO (C) 425 PSI
INITIAL CLOSED IN PERIOD MIN: 48 (D) 1580 PSI
FINAL FLOW PERIOD MIN: 30 (E) 478 PSI TO (F) 451 PSI
FINAL CLOSED IN PERIOD MIN: 75 (G) 1579 PSI
FINAL HYDROSTATIC PRESSURE (H) 2306 PSI

WESTERN TESTING CO. INC.
GAS FLOW REPORT

DATE: 5-25-85
CUSTOMER: VINCENT OIL CORPORATION
WELL: 2 TEST: 1
ELEVATION (KB): 2176 FORMATION: MARMATON
SECTION: 27 TOWNSHIP: 29S
RANGE: 18W COUNTY: KIOWA STATE: KANSAS
GAUGE SN #13402 RANGE: 4025 CLOCK: 12

TIME GAUGE (MIN)	TESTER TYPE	ORIFICE SIZE	PRESSURE (PSI)	FLOW DESCRIPTION
---------------------	-------------	-----------------	-------------------	------------------


PRE FLOW

5	MERLA	1 1/2	19 PSIG	1887000 CFPD
10			18	1824000
20			17	1760000
30			16	1694000


SECOND FLOW

10	MERLA	1 1/2	18 PSIG	1824000 CFPD STARTED BLOWING MIST OF MUD & OIL AFTER 10 MIN.
----	-------	-------	---------	--

GAS BOTTLE SN #: WTC H-01
DATE BOTTLE FILLED: 5-25-85
DATE TO BE INVOICED:

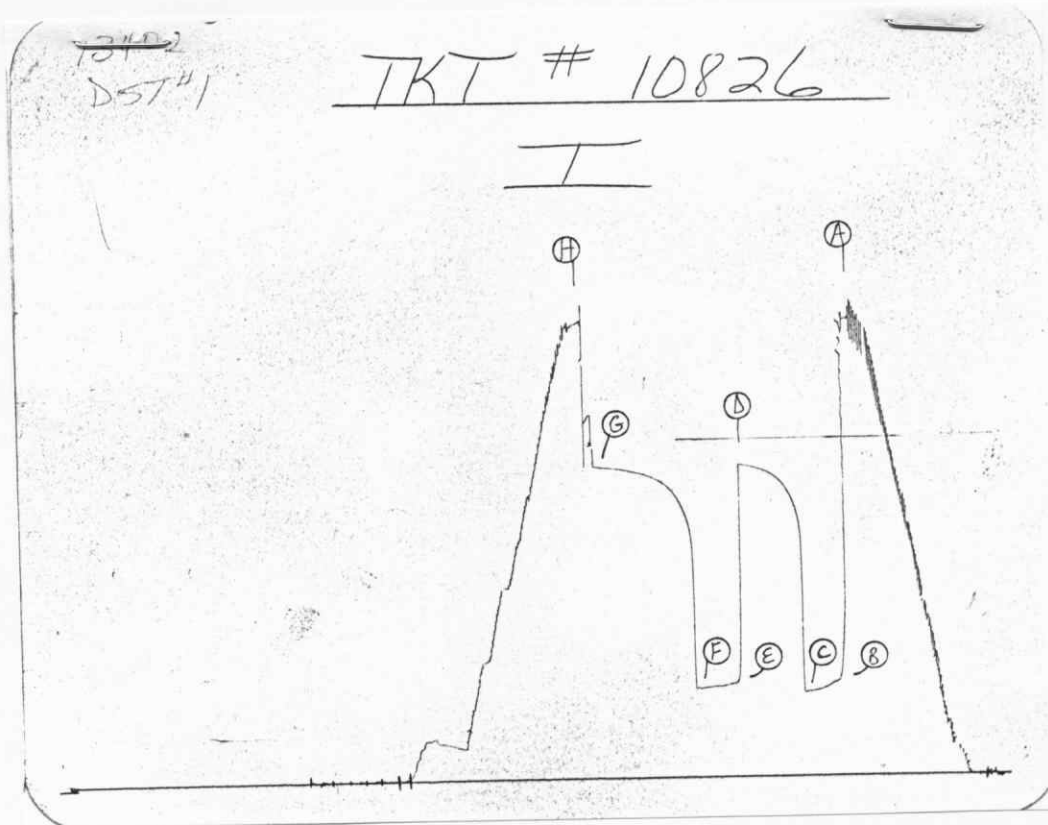

Inside Recorder

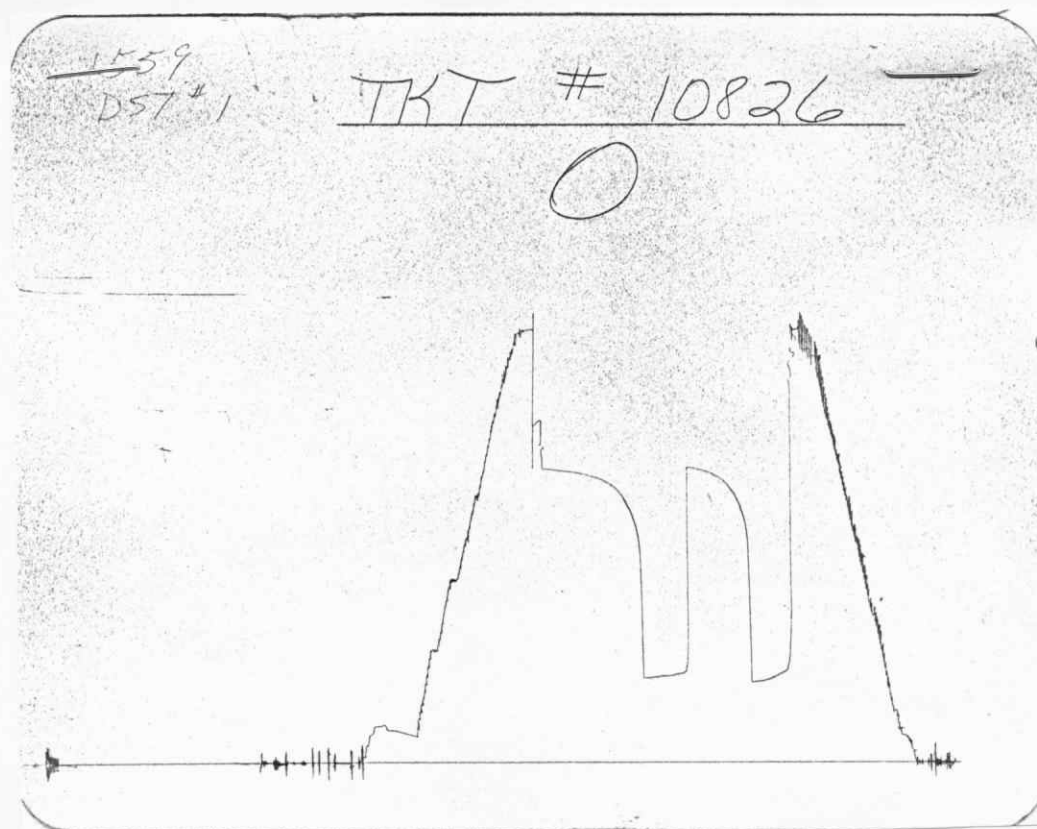

Outside Recorder