

DX 78-1


Kiowa

KANSAS

Section 20 Township 29 Range 18 W

Well No. # 1 Nichols

Company Gulf Oil

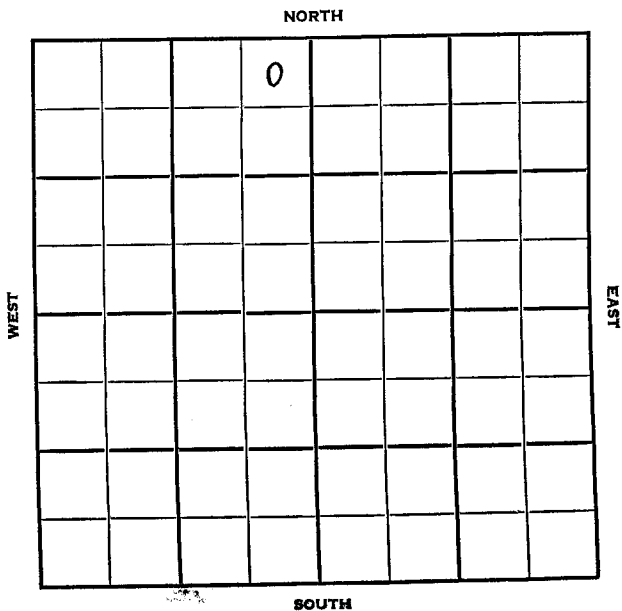

Kiowa KANSAS

SEC.	TWP.	R.
20	29	18W

WELL NO. 1 Nichols FARM

COMPANY Gulf Oil

CONTRACTOR Falcon-Seaboard


Wildcat

330 Ft. from N. Line

Ft. from S. Line

330 Ft. from E. Line

Ft. from W. Line



NE NE NW

	ELEVATION	REPORT
1955	2274'	

1/5 Spud 1-3-55
Drlg. 355'

3/2 Spud 1-3-55 SI gas well TD 5630'
10" @ 353 Heeb 4163' Doug 4195'
Br. lime 4354', Lans 4361'
DST 4384-95, open 1 hr rec 100' mud.
405#. DST 4384-4403, open 45 min
rec 400' gas, 30' SOCM, 105' SO &
GCM 220#. DST 4523-33 open 1/2 hr
rec 90' gas, 90' SGCM 910#.
Miss 4958'
DST 4960-64, open 1 hr rec 18' SGCM
1457# DST 4960-75 open 2 hr,
gas in 22 min, 1,250,000 CFG
240,000 CFG 2 hr., 176' HG & dist, CM
1600#. DST 4960-85 open 1 hr gas i
4 min. 1,630,000 CFG 7 min,
3,210,000 CFG 1 hr, 240' HG & dist CM
1635# DST 5003-12 open 2 hr. red
144' HG & dist. CM, 120' SO & GCSW
1547#. DST 4998-5004, open 3 hr,
rec 4' GCM 0#. Kh. 5216', Viola
5246', Simp. 5428'
DST 5443-48 open 1 hr rec 85' mud
95#. Arb. 5569'

1955
3/2

(Information continued)

DST 5560-69 open 35 min rec 35' mud
1875#. TD 5630'

Schl tops: Heeb 4141', Lans 4361'
Miss 4958', Kh. 5214', Viola 5244',
Simp. 5426', Arb. 5569',

5" @ 5259 CO to 5224 56/5154-68
B/18 GM 6 hr. 40/5070-80 B/182 GW
5½ hr. PB 5043 24/4997-5003
B/24 GW 18 hr. 200 A. frac.
F/gas 5 hr. 1,200,000 CFG.
Comp. SI gas well 7,218,000 CFGPD

COMPLETED

orig. Data

Rec. 144' hg & dist. cm. 120' so & gcsw

1547# DST 4998-5004 open 3 hr.

Rec. 4' gcm 0# Kh. 5216 Viola 5246

Simp. 5428 DST 5443-48 open 1 hr.

Rec. 85' mud 95# Arb. 5569 DST 5560-

69 open 35 min. Rec. 35' mud 1875#

TD 5630 SCHLUMBERGER TOPS:

Heeb. 4141 Lans. 4361 Miss. 4958

Kh. 5214 Viola 5244 Simp. 5426

Arb. 5569 5" @ 5259 CO to 5224

56/ 5154-68 B/ 18 gm 6 hr. 40/ 5070-80

B/ 132 gw $5\frac{1}{2}$ hr. PB 5043 24/ 4997-5003

B/ 24 gw 18 hr. 200 A frac

F/ gas 5 hr. 1,200,000 cfg

Comp. SI gas well 7,218,000 cfgpd