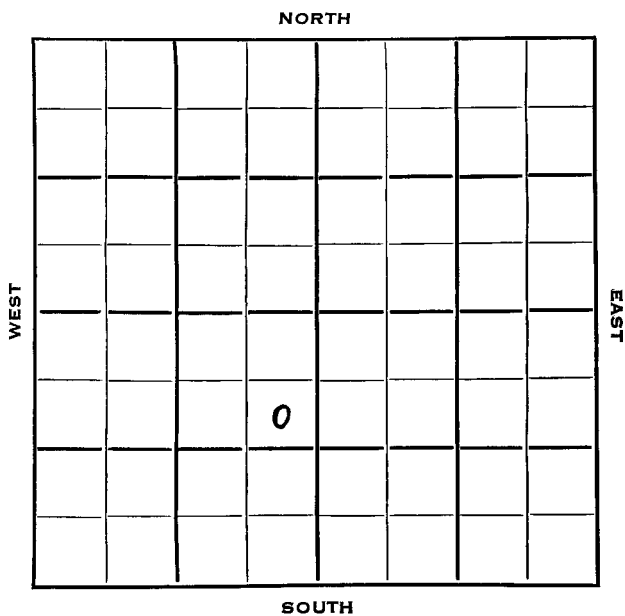


Section 30 Township 29 Range 5 WWell No. # 1 Jake GraberCompany Texas Company

Kingman

KANSAS

Sec. 30 Twp. 29 R. 5WWell No. #1 Jake Graber FarmTexas Company CompanyStickle Drlg. Contractor

Wildcat


990 Ft. from N. Line

Ft. from S. Line

330 Ft. from E. Line

Ft. from W. Line

SE NE SW



1953 lev. 1514' REPORT

8/26 Spud 8-22-53
10" @ 432'
WOC.

9/2 Top. 2463'
DST 2488-2502' 1 hr , 3' M 125#
Drlg 3049'

9/15 Heebner 2970' Lansing 3228'
KC 3515' Base KC 3734'
Marmington 3778' Ft. Scott 3910'
Cherokee 3928' Miss. 4100'
DST 4100-4107 open 1½ hrs. rec
105' salt water
Viola 4446'
DST 4460-75 open 1 hr gas 10 mins.
Flowed oil 1 hr. 1725# BHP
DST 4474-82 open 15 mins, gas to
surface 5 mins, oil to surface 12 min
rec 3600' oil. BHP 1665#
Coring ahead. (Tel-McGehee)

9/17 Simp 4464'
Cored 4482-92 rec 5' dol. sd, bleedin
oil & gas, 5' white sand.
DST 4482-92, open 1 hr gas in 8 min.
F/mud in 30 min. F/oil in 40 min.
1715# (Ltr-McGehee)

OVER

1953

9/24

Arb. 4599' TD 4614'
7" @ 4588 CO to 4488 48/4468-80
Lost swab in the hole. (Ltr-McGehee)

9/30

F/195 BO $5\frac{1}{4}$ hrs thru tubing
F/30 BO $1\frac{1}{2}$ hrs, 3/8" choke.

10/7

N.R.

10/14 Spud 8-22-53

Oil Well

TD 4614'

10" @ 432'

Top. 2463,

DST 2488'-2502' opn 1 hr, rec 3' mud
125# Heeb 2970, Lans 3228, KC 3515,
B KC 3734, Marm 3778, Ft. Scott 3910
Cherokee 3928, Miss 4100'

DST 4100'-07' opn $1\frac{1}{2}$ hr, rec 105' sw
Viola 4446', Simp 4464,

DST 4460'-75' opn 1 hr, gas in 10
min, F/ oil 1 hr. 1725#.

DST 4474'-82' opn $\frac{1}{4}$ hr, gas in 5 min
oil in 12 min, F/ oil 1665#

DST 4482'-92' opn 1 hr, gas in 8 min
F/ mud in 30 min. F/ oil in 40 min

1715# Arb 4599

TD 4614'

7" @ 4588'

CO to 4488

48/ 4468'-80' F 195 bo $5\frac{1}{4}$ hr.


F/ 403 bo $11\frac{1}{2}$ hr.

F/ 30 bo $1\frac{1}{2}$ hr.

Comp. 1901 bopd.

COMPLETED

County Kingman State Kansas
 Sec. 30 (Blk. 29) (Sur. 5W) Map No. 29
 Operator Texas Company
 Well No. 1 Farm Jake Graber
 Elev. 1514 Location SE NE SW



990 Ft. From N Line SW
330 Ft. From E Line Quarter

1st. Report

Completion OCT 14 1951

Remarks Wildcat

Stickle Drlg. - Contr.

Spudding Date 8-22-53

Drlg. Data Oil well TD 4614

10" C 432 Top. 2463 DST 2488-2502

open 1 hr. Rec. 3' mud 125' Heeb. 2970

Lans. 3228 KC 3515 B KC 3734

Marm. 3778 Ft. Scott 3910 Cherokee 3928

Miss. 4100 DST 4100-07 open 1½ hr.

Rec. 105' sw Viola 4446 Simp. 4464

DST 4460-75 open 1 hr. gas in 10 min.

F/ oil 1 hr. 1725' DST 4474-82

open ½ hr. gas in 5 min. oil in 12 min.

F/ oil 1665' DST 4482-92 open 1 hr.

gas in 8 min. F/ mud in 30 min. F/ oil

in 40 min. 1715' Arb. 4599 TD 4614

7" C 4588 CO to 4488 48/ 4468-80

F/ 195 bo 5½ hr. F/ 403 bo 11½ hr.

J. G. McQUEEN