Kingman KANSAS

SECTION 36 TOWNSHIP 29 RANGE 7W

WELL NO. #1 Coykendall

COMPANY Pickrell Drlg.

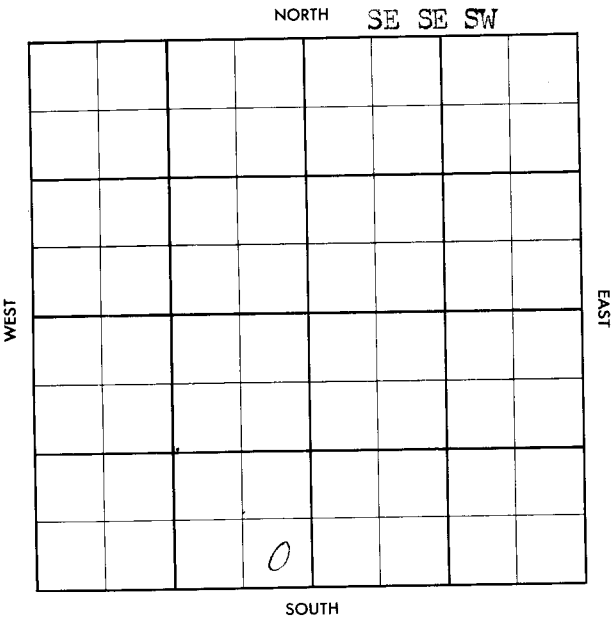

FORM 504-3 SUNRAY

HOT FILE

SEC. 36 | TWP. 29 S | R. 7 W | Kingman | KANSAS

WELL NO. # 1 Coykendall FARM

COMPANY Pickrell Drlg. Co.

CONTRACTOR Co. tools

Wildcat



_____ FT. FROM N. LINE

_____ FT. FROM S. LINE

_____ FT. FROM E. LINE

_____ FT. FROM W. LINE

SE SE SW

Pure -FO

SDX-DHC-$3,000.00 (Lse S-25294)

ELEVATION

1957 1455' Gr. 1458' DF REPORT (WH7-DC2) ✓

Mississippi Test appx 4100'

1/29 To be commenced by March 1, 1957
To be completed by April 1, 1957
(See copy DHC Agrt 1-29-57)

2/13 Location (FR Tkt)

3/27 Spud 2-25-57 8-5/8" @ 160 w/140
DST 4102-18 (90") rec 90' GCM, SSO
BHP 155# 20"
DST 4120-40', (60") gas 23", rec 70'
GCM, SSO + 220' HO&GCM + 8' SW.
FP 90#. BHP 1400-620# 20".
DST 4140-70(90") gas 80", rec 125'
HG & SOCM + 575' HO&GCWM + 120' MCSW
FP 130-310#. BHP 1660# 1500# 20"
RTD 4200' Log. 4½" @ 4200 w/110 sax
WOCT. MICT CO 4165' Perf 24/4121-
27. Swab est 12 BFPH (1/2 BO) + SSG
To sqz. Sqzd perfs 4121-27' CO 4170
Perf 24/4118-24 24/4124-30 B/3 GOPH
+ wtr. No time. Swabbed load &
swabbed 12½ BWPH + rainbow SO & Gas.
TD 4200' D & A
Log tops: H. 3045', L. 3277', KC 3553
M. 4099'

4/4 (Advised Contract Section- D & A) ABANDONED ✓

FORM 504-5 SUNRAY

FORM 513 SUNRAY

WILDCAT

County Kingman Elev.

Sec. ~~30~~ 36 Twp. ~~27~~ 29 Rge. ~~9W~~ 7W

Company Pickrell Drlg.

Farm Name Coykendall No. 1

TOPS	DEPTH	LOG	DATUM
Anh.			
Tp.			
H.			
Tr.			
Dg.			
B.L.			
L.			
K.C.			
B.K.C.			
Ce.			
C.			
M.			
M.			
K.			
Mz.			
Mo.			
V.			
S.			
S.			
A			
R.			
PE.			
G.			
TD.			

Loc. in Sec.

SE SE SW

Geol.

Contr.

Co. Tools

Pool

Wildcat

FIRST REPORT

FEB 13 '57

SDX DHM

0

Date Comm.

Pure FO

Loc.

27

Co. Lse. No. Sec. T. R.

CORRECTION

FORM 513 SUNDAY

1455 Gr

County Kingman Elev. 1458 DF

Sec. ~~30~~ 6 Twp. ~~29~~ 29 Rge. ~~9W~~ 7W

Company Pickrell Drlg.

Farm Name Coykendall No. 1

[redacted]	DEPTH	OG	DATUM
H.	3044	3048	
Tr.			
Dg.			
Bl.			
L.	3276	3277	
K.C.	3550	3553	
B.K.C.			
Ce.			
C.			
M.	4099	4099	
M.			
K.			
Mz.			
Mo.			
V.			
S.			
S.			
A			
R.			
P€.			
G.			
T.D.	4200	4201	

Loc. in Sec. SE SE SW

Geol.

Contr. Co. Tools

Pool Wildcat

MAR 27 '57

ABANDONED

Date Comm. Pure FO

FEB 20 '57 FEB 27 '57 LOC MAR 6 '57

Spd 2-25-57 8 5/8 160/140

Ø 3500 MAR 13 '57 DST 4102-19 (90)

rec 90' GCM SSO. BHP 155 (20)

DST 4120-40 (60), gas (23) rec 70'

GCM SSO. + 220' HO+GCM + 8' SW

FP 90 BHP 1400-620 (20) DST 4140-

70 (90) gas (80) rec 125 HG+SOCM

+575 HO+GCWM + 120 MCSW

Co. Lse. No. Sec. T. R.

FORM 513-1 SUNRAY

FP 130 - 310 BHP 1660 - 1500(24)
PTD 4200 Log
4½ 4200/110 SX WOST
MICT CO 4165 24/4121-27
$ est 12 BFPh (½ BO) + SS
Gas to SQ X SQd PF 4121-27
CO 4170 24/4118-24 24/4124-30
B 3 Gaph + wtr no time 1/4 $
Ld & $ 12½ BWph + Rainbow
S.O. + Gas
D & A Log Tops