Eastern Formation Testing

No. 148

Lease Schaufler Well No. 1	Date 9/5/74
County Kingman Sec. 23 Twp. 10 Rng. 30 W	Elevation
Company Mallonee & Mahoney	Test No. 1
Contractor Gabert & Jones Drilling Company	Zone Tested Mississippi
Charge To Mallonee & Mahoney	
Approved By T. W. Mahoney	Tester Vernon Williams

Recorder No. 1760 Clock Range 12hr. Recorder No. 2836 Clock Range 12hr.

Depth 4383 Depth 4396

Initial Hydro Mud Press. 2222 P.S.I.

Initial Flow Press. 35 To 35 P.S.I. Initial Flow Period 45 Min.

Initial Shut-in Press. 1017 P.S.I. Initial Shut-in 45 Min.

Final Flow Press. 35 To 35 P.S.I. Final Flow Period 45 Min.

Final Shut-in Press. 1212 P.S.I. Final Shut-in 45 Min.

Final Hydro Mud Press. 2195 P.S.I.

Temperature 112

Mud Weight 9.3 Viscosity 39

Fluid Loss 19.4

Interval Tested 4380 To 4400

Top Packer Depth 4375 Surface Choke Size ½"

Bottom Packer Depth 4380 Bottom Choke Size 5/8"

Total Depth 4400 Main Hole Size 7 7/8"

Drill Pipe Size 4½ FH Wt 16.60 Rubber Size 6 3/4"

Drill Collar I.D. 2¼ Ft. Run 386'

Blow Strong throughout test

Recovery Gas to surface 2 min. on second opening 12,500 in 10 min., 14,100 in 45 min.

110' Gas Cut mud.

Remarks

EASTERN FORMATION TESTING shall not be liable for damage of any kind to the property or personnel of the party for whom a test is made, or for any loss suffered or sustained, directly or indirectly, through or in the course of the use of its equipment, or its statement or opinion concerning the result of any test, all of which loss or damage is assumed by the customer. Tools lost or damaged in the hole shall be paid for at cost by the party for whom test is made.


1760
148

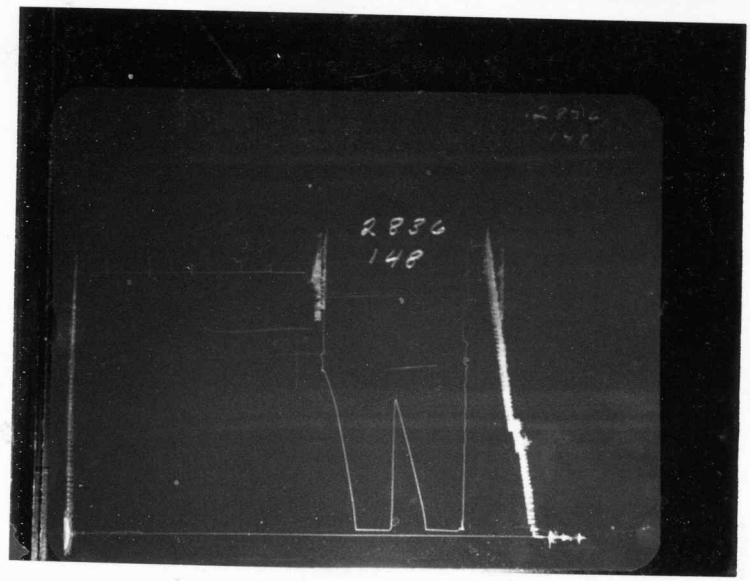
2836
148

Eastern Formation Testing

No. 149

Lease Schaufler Well No. 1	Date 9/7/74
County Kingman Sec. 23 Twp. 10 Rng. 30 W	Elevation
Company Mallonee & Mahoney	Test No. 2
Contractor Gabert & Jones Drilling Co.	Zone Tested Viola
Charge To Mallonee & Mahoney	
Approved By J. W. Mahoney	Tester Vernon Williams

Recorder No. 1760 Clock Range 12hr Recorder No. 2836 Clock Range 12hr.

Depth 4608 Depth 4632

Initial Hydro Mud Press. 2413 P.S.I.

Initial Flow Press. 34 To 34 P.S.I. Initial Flow Period 30 Min.

Initial Shut-in Press. 522 P.S.I. Initial Shut-in 30 Min.

Final Flow Press. 34 To 34 P.S.I. Final Flow Period 30 Min.

Final Shut-in Press. 600 P.S.I. Final Shut-in 30 Min.

Final Hydro Mud Press. 2351 P.S.I.

Temperature 114

Mud Weight 9.6 Viscosity 39

Fluid Loss 13.2

Interval Tested 4605 To 4636

Top Packer Depth 4600 Surface Choke Size 1"

Bottom Packer Depth 4605 Bottom Choke Size 5/8"

Total Depth 4636 Main Hole Size 7 7/8"

Drill Pipe Size 4½ FH Wt 16.60 Rubber Size 6 3/4"

Drill Collar I.D. 2¼ Ft. Run 386'

Blow Strong throughout test

Recovery 60' Drilling mud

Remarks

EASTERN FORMATION TESTING shall not be liable for damage of any kind to the property or personnel of the party for whom a test is made, or for any loss suffered or sustained, directly or indirectly, through or in the course of the use of its equipment, or its statement or opinion concerning the result of any test, all of which loss or damage is assumed by the customer. Tools lost or damaged in the hole shall be paid for at cost by the party for whom test is made.


1760
149


2836
149

Eastern Formation Testing

No. 150

Lease Schaufler Well No. 1	Date 9/8/74
County Kingman Sec. 23 Twp. 10 Rng. 30 W	Elevation
Company Mallonee & Mahoney	Test No. 3
Contractor Gabbert-Jones Drilling Co.	Zone Tested Simpson
Charge To Mallonee & Mahoney	
Approved By J. W. Mahoney	Tester Vernon Williams

Recorder No. 1760 Clock Range 12hr. Recorder No. 2836 Clock Range 12hr.

Depth 4640 Depth 4666

Initial Hydro Mud Press. 2413 P.S.I.

Initial Flow Press. 17 To 17 P.S.I. Initial Flow Period 10 Min.

Initial Shut-in Press. 34 P.S.I. Initial Shut-in 30 Min.

Final Flow Press. To P.S.I. Final Flow Period Min.

Final Shut-in Press. P.S.I. Final Shut-in Min.

Final Hydro Mud Press. 2405 P.S.I.

Temperature 114

Mud Weight 9.6 Viscosity 39

Fluid Loss 13.2

Interval Tested 4643 To 4670

Top Packer Depth 4638 Surface Choke Size 1"

Bottom Packer Depth 4643 Bottom Choke Size 5/8"

Total Depth 4670 Main Hole Size 7 7/8"

Drill Pipe Size 4½ FH Wt 16.60 Rubber Size 6 3/4"

Drill Collar I.D. 2¼ Ft. Run 386'

Blow Very weak 3 Min.

Recovery 5' Drilling mud

Remarks

EASTERN FORMATION TESTING shall not be liable for damage of any kind to the property or personnel of the party for whom a test is made, or for any loss suffered or sustained, directly or indirectly, through or in the course of the use of its equipment, or its statement or opinion concerning the result of any test, all of which loss or damage is assumed by the customer. Tools lost or damaged in the hole shall be paid for at cost by the party for

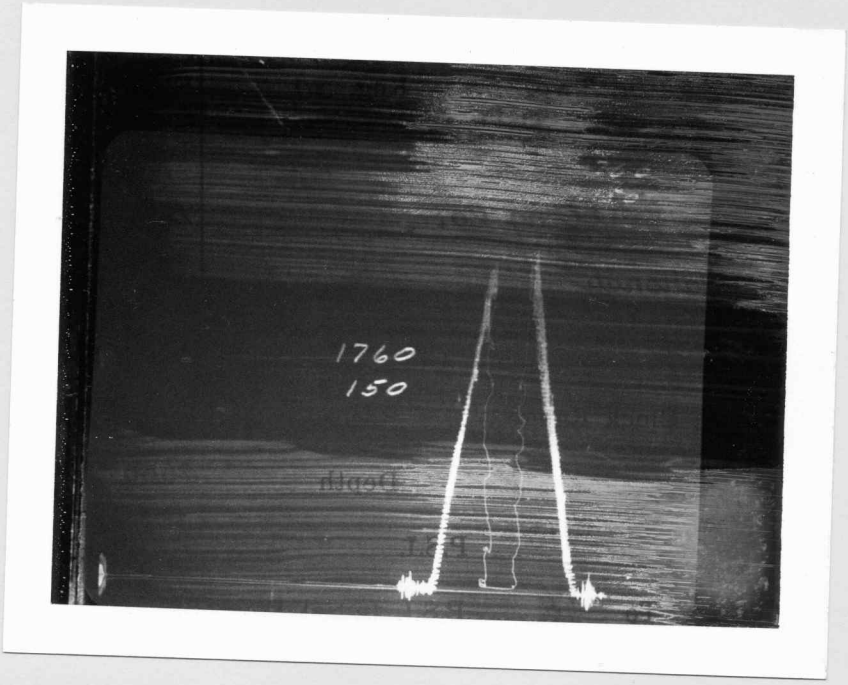
1760
150

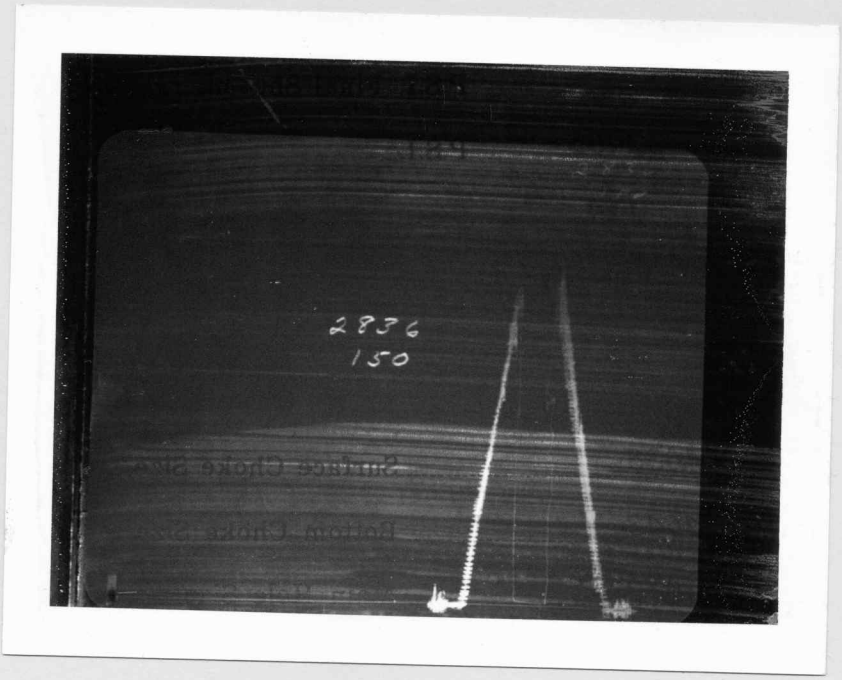
2836
150

Eastern Formation Testing

No. 151

Lease Schaufler Well No. 1	Date 9/8/74
County Kingman Sec. 23 Twp. 10 Rng. 30 W	Elevation
Company Mallonee & Mahoney	Test No. 4
Contractor Gabbert & Jones Drilling Co.	Zone Tested Simpson
Charge To Mallonee & Mahoney	
Approved By J. W. Mahoney	Tester Vernon Williams

Recorder No. 1760 Clock Range 12hr Recorder No. 2836 Clock Range 12hr.

Depth 4656 Depth 4669

Initial Hydro Mud Press. 2405 P.S.I.

Initial Flow Press. 59 To 154 P.S.I. Initial Flow Period 45 Min.

Initial Shut-in Press. 1613 P.S.I. Initial Shut-in 45 Min.

Final Flow Press. 179 To 291 P.S.I. Final Flow Period 75 Min.

Final Shut-in Press. 1613 P.S.I. Final Shut-in 45 Min.

Final Hydro Mud Press. 2405 P.S.I.

Temperature 116

Mud Weight 9.6 Viscosity 43

Fluid Loss 14

Interval Tested 4653 To 4673

Top Packer Depth 4647 Surface Choke Size 1"

Bottom Packer Depth 4653 Bottom Choke Size 5/8"

Total Depth 4673 Main Hole Size 7 7/8"

Drill Pipe Size 4½ FH Wt 16.60 Rubber Size 6 3/4"

Drill Collar I.D. 2¼" Ft. Run 386'

Blow Good throughout test

Recovery 200' Gas in pipe

210' Gas & slightly oil cut muddy water

420' Gas cut water

Remarks

EASTERN FORMATION TESTING shall not be liable for damage of any kind to the property or personnel of the party for whom a test is made, or for any loss suffered or sustained, directly or indirectly, through or in the course of the use of its equipment, or its statement or opinion concerning the result of any test, all of which loss or damage is assumed by the customer. Tools lost or damaged in the hole shall be paid for at cost by the party for

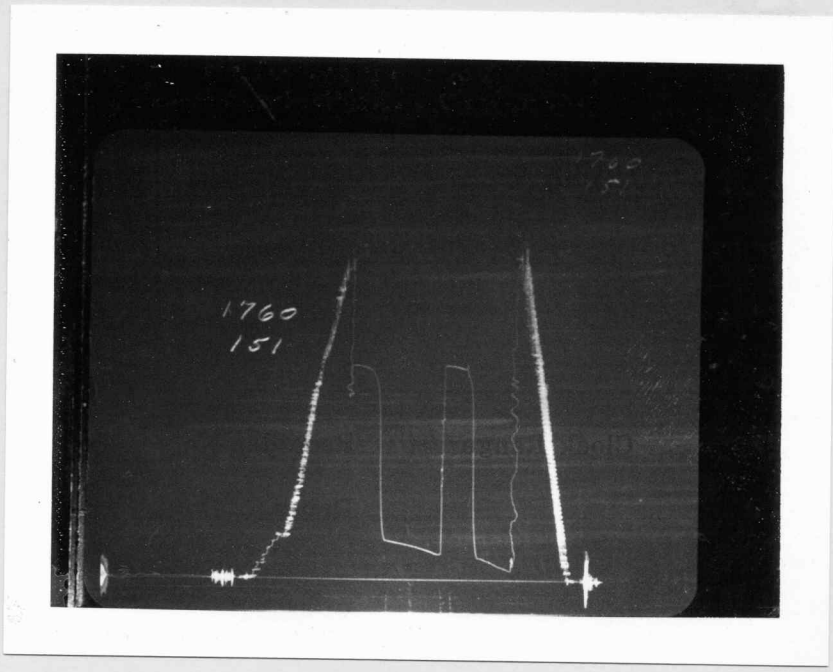
1760
151

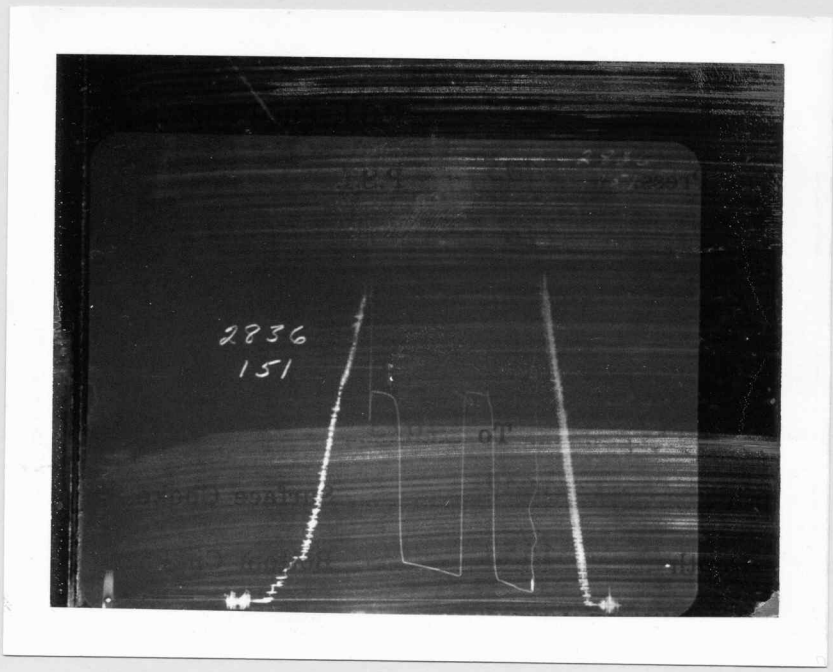
2236
151