


WELL PLUGGING RECORD

ve All information Completely
e Required Affidavit
ll or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

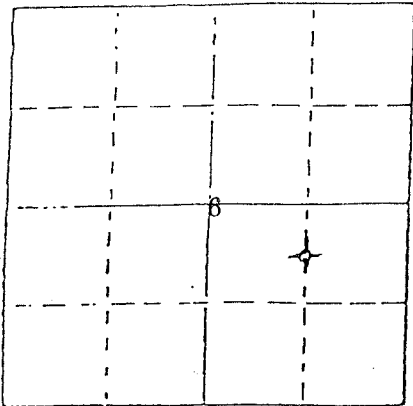

Barber County. Sec. 6 Twp. 30 Rge. 12v
Location as "NE/CNW/SW" or footage from lines
C/N/2/SE/4
Lease Owner Rupe Oil Co., Inc.
Lease Name Shaw Farms Well No. #1
Office Address Box 2273 - Wichita, Ks. 67201
Character of Well (Completed as Oil, Gas or Dry Hole)
Gas
Date Well completed
Application for plugging filed
Application for plugging approved
Plugging commenced December 19, 1981
Plugging completed December 28, 1981
Reason for abandonment of well or producing formation
Depleted
If a producing well is abandoned, date of last product

Was permission obtained from the Conservation Division
its agents before plugging was commenced? Yes
e of Conservation Agent who supervised plugging of this well Maurice V. Leslie
ducing formation Depth to top Bottom Total Depth of Well
w depth and thickness of all water, oil and gas formations. 3035'

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	286'	NONE
				4 1/2"	2875'	2139.91'

Describe in detail the manner in which the well was plugged, indicating where the mud
placed and the method or methods used in introducing it into the hold. If cement or
s were used, state the character of same and depth placed, from feet to
feet for each plug set.

Dumped sand to 2750' and four (4) sacks cement.
Shot pipe @ 2140'.
Pulled sixty-one (61) joints of 4 1/2" casing.
Squeezed well with fifteen (15) sacks gel, six (6) sacks
hulls, ten (10) sacks gel, one hundred fifty (150) sacks
50/50 pozmix cement, with 2% added gel and 3% calcium chloride.

(If additional description is necessary, use BACK of this sheet)
of Plugging Contractor Rockhold Engineering, Inc.

OF KANSAS COUNTY OF BARTON, ss.
James W. Rockhold (employee of owner) or (owner or opera
e above-described well, being first duly sworn on oath, says: That I have knowledge o
acts, statements, and matters herein contained and the log of the above-described well
led and that the same are true and correct. So help me God.

(Signature) James W. Rockhold
James W. Rockhold - Box 698 - Great Bend, Ks. 6753

SUBSCRIBED AND SWORN TO before me this 8th day of Jan, 1982

mission expires
RUTH BRACK
State of Kansas
My Appt. Exp. 9/2/84

(Address)
Notary Public.

mailed original
state cap.
1/17/82