



Operator

DESIGNATE TYPE OF COMP.: OIL, GAS, DRY HOLE, SWDW, ETC.:

Pickrell Drilling Company

Well No.  
#1-F

Lease Name  
Baldwin

S 15 T 30S R 22W E  
W

**WELL LOG**


Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.

SHOW GEOLOGICAL MARKERS, LOGS RUN, OR OTHER DESCRIPTIVE INFORMATION.

FORMATION DESCRIPTION, CONTENTS, ETC.	TOP	BOTTOM	NAME	DEPTH
<p><u>DST #1</u></p> <p>5280'-5335' 30"-60"-90"-90" GTS 3" Ga            1,274 MCF 10" 953-30" 2nd op 817-10"            283-20" 86-30" 84-40" 101-50" 104-60"            106-70" 115-80" 123-90" rec. 170' FO            720' G VSL water cut oil-(65% oil 20%            gas 12% water 3% mud) IFP 288#-202#            FFP 245#-384# ISIP 1286# FSIP 1035#</p> <p><u>DST #2</u></p> <p>6245'-6270' weak blow increased to good            30"-60"-90"-90" rec. 835' water IFP 63#-            168# FFP 210#-399# ISIP 2144# FSIP 2133#</p> <p>TIGHT HOLE DO NOT RELEASE ANY OF THE            INFORMATION</p>			<p><u>Elog Tops</u></p> <p>Heebner            Brown Lime            Stark            B/Paw            Cke            B/Inola            Miss            Lansing</p>	<p>4390(-1985)            4562(-2157)            4926(-2521)            5177(-2772)            5210(-2805)            5284(-2879)            5302(-2897)            4578(-2173)</p>

USE ADDITIONAL SHEETS, IF NECESSARY, TO COMPLETE WELL RECORD.

Date Received

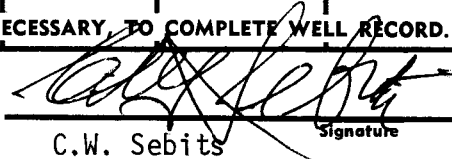

C.W. Sebitts

Signature

Title

Date