

STATE CORPORATION COMMISSION OF KANSAS
OIL & GAS CONSERVATION DIVISION
WELL COMPLETION FORM
ACO-1 WELL HISTORY
DESCRIPTION OF WELL AND LEASE

Operator: License # 5952
Name: Amoco Production Company
Address P.O. Box 800, Rm. 2444

City/State/Zip Denver, CO 80201
Purchaser:
Operator Contact Person: Julie Victor
Phone (303) 830-4009
Contractor Name: Cheyenne Drilling
License: #5382
Wellsite Geologist:


Designate Type of Completion

☒ New Well ☐ Re-Entry ☐ Workover
☐ Oil ☐ SWD ☐ Temp. Abd.
☒ Gas ☐ Inj ☒ Delayed Comp.
☐ Dry ☐ Other (Core, Water Supply, etc.)

If OWD: old well info as follows:

Operator: N/AWell Name: Comp. Date Old Total Depth

Drilling Method:

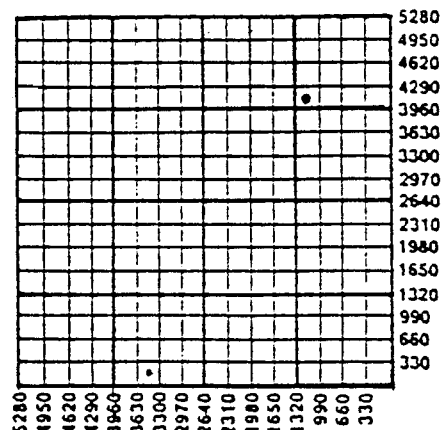☒ Mud Rotary ☐ Air Rotary ☐ Cable4/17/91 4/20/91Spud Date Date Reached TD Completion Date API NO. 15- 187-20568County StantonSW NE SE Sec. 6 Twp. 30 Rge. 39 ☒ East West4030 Ft. North from Southeast Corner of Section1250 Ft. West from Southeast Corner of Section
(NOTE: Locate well in section plat below.)Lease Name Baughman G.U. E Well # 3HIField Name HugotonProducing Formation ChaseElevation: Ground 3219' KB 3230'Total Depth 2556' PBTD Amount of Surface Pipe Set and Cemented at 618 FeetMultiple Stage Cementing Collar Used? ☐ Yes ☒ NoIf yes, show depth set FeetIf Alternate II completion, cement circulated from feet depth to w/ sx cmt.

INSTRUCTIONS: This form shall be completed in triplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 120 days of the spud date of any well. Rule 82-3-130, 82-3-107 and 82-3-108 apply. Information on side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3-107 for confidentiality in excess of 12 months. One copy of all wireline logs and drillers time log shall be attached with this form. ALL CEMENTING TICKETS MUST BE ATTACHED. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells. Any recompletion, workover or conversion of a well requires filing of ACO-2 within 120 days from commencement date of such work.

All requirements of the statutes, rules and regulations promulgated to regulate the oil and gas industry have been fully complied with and the statements herein are complete and correct to the best of my knowledge.

Signature Julie VictorTitle Permitting Representative Date 8/29/91Subscribed and sworn to before me this 29 day of August,
1991.Public Natalie M. WoodCommission Expires December 26, 1994

K.C.C. OFFICE USE ONLY

F ☐ Letter of Confidentiality Attached
C ☐ Wireline Log Received
C ☐ Drillers Timelog Received

Distribution

☒ KCC ☐ SWD/Rep ☒ NGPA
☒ KGS ☐ Plug ☐ Other
(Specify)

SIDE TWO

Operator Name Amoco Production CompanyLease Name Baughman G.U. EWell # 3HISec. 6 Twp. 30 Rge. 39☐ EastCounty Stanton☒ West

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all drill stem tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface during test. Attach extra sheet if more space is needed. Attach copy of log.

Drill Stem Tests Taken ☐ Yes ☒ No
(Attach Additional Sheets.)Samples Sent to Geological Survey ☐ Yes ☒ NoCores Taken ☐ Yes ☒ NoElectric Log Run ☐ Yes ☒ No
(Submit Copy.)

Formation Description

☐ Log ☒ Sample

Name	Top	Bottom
Chase	2255'	2560'

CASING RECORD

☒ New ☐ Used

Report all strings set-conductor, surface, intermediate, production, etc.

Purpose of String	Size Hole Drilled	Size Casing Set (In O.D.)	Weight Lbs./Ft.	Setting Depth	Type of Cement	# Sacks Used	Type and Percent Additives
Surface	12-1/4"	8-5/8"	24#	618'	Prem Plus	300	
					Prem Plus	100	
Production	7-7/8"	5-1/2"	15.5#	2,556'	Prem Plus	450	
					Prem Plus	100	

PERFORATION RECORD

Shots Per Foot Specify Footage of Each Interval Perforated

Acid, Fracture, Shot, Cement Squeeze Record
(Amount and Kind of Material Used) Depth

TUBING RECORD

Size

Set At

Packer At

Liner Run

☐ Yes ☒ No

N/A

Date of First Production

Producing Method

☐ Flowing ☐ Pumping ☐ Gas Lift ☐ Other (Explain)

Estimated Production Per 24 Hours

Oil

Bbls.

Gas

Mcf

Water

Bbls.

Gas-Oil Ratio

Gravity

Disposition of Gas:

METHOD OF COMPLETION

Production Interval

☐ Vented ☐ Sold ☐ Used on Lease
(If vented, submit ACO-18.)☐ Open Hole ☐ Perforation ☐ Dually Completed ☐ Commingled☒ Other (Specify) Slotted Casing2260-2556'

DRILLERS LOG

AMOCO PRODUCTION COMPANY
BAUGHMAN GU "E" NO. 3 HI
SECTION 6-T30S-R39W
STANTON COUNTY, KANSAS

COMMENCED: 04-17-91
COMPLETED: 04-20-91

SURFACE CASING: 608' OF 8 5/8"
OMTD W/150 SX LT "C", 2% C.C.,
1/4#/SX FLO-CELE; TAILED IN W/
150 SX "C", 2% C.C., 1/4#/SX FLO-CELE

FORMATION	DEPTH
SURFACE HOLE	0- 618
RED BED & ANHYDRITE	618-1848
SHALE & LIME	1848-2556 RTD


I DO HEREBY CERTIFY THAT THE FOREGOING STATEMENTS ARE TRUE AND CORRECT
TO THE BEST OF MY KNOWLEDGE AND BELIEF.

CHEYENNE DRILLING, INC.

Claude E. Norwood
CLAUDE E. NORWOOD

STATE OF KANSAS :ss:

SUBSCRIBED AND SWORN TO BEFORE ME THIS 23RD DAY OF APRIL, 1991.



Becky J. Whetstone
BECKY J. WHETSTONE, NOTARY PUBLIC