

Geological Survey

CONTRACTOR'S WELL LOG

15-007-20452

MAR 17 1977

OPERATOR:
CONTRACTOR:
WELL NAME:
LOCATION:

DuPont Oil Co.
Abercrombie Drilling, Inc.
SKINNER #1
C NW SE, Section 9-31S-14W
Barber County, Kansas
October 20, 1976
October 30, 1976

SPUD DATE:
COMPLETION DATE:

0	163	Sand & Red Bed
163	1420	Red Bed & Shale
1420	1695	Shale & Shells
1695	2215	Shale & Lime
2215	2475	Lime & Shale
2475	2897	Shale & Lime
2897	2990	Lime & Shale
2990	3060	Shale & Lime
3060	3737	Lime & Shale
	3737	Rotary Total Depth

Ran 4 jts. of 13 3/8" casing, (Tally 156.38') Set at 154' with 250 sx. of common cement, 3% Ca. Cl., 2% gel. Cement did circulate. Job complete at 1:30 a.m. - 10-20-76.

Ran 21 jts. of new 8 5/8" surface casing - 24#. (Overall tally 829.66) Set at 824' with 250 sx. of 50/50 posmix, 6% gel, 2% Ca. Cl., 2% Ca. Cl., followed by 175 sx. of common cement, 3% Ca. Cl., 2% gel. Plug was down at 6:30 p.m. 10-20-76. Cement did circulate.

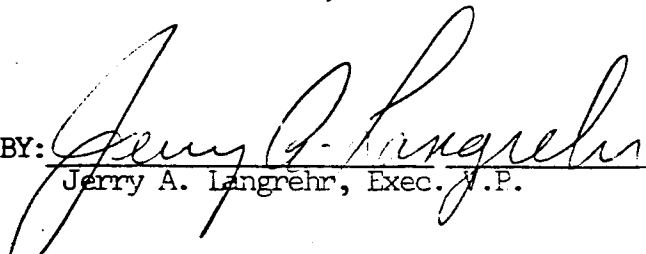
T.D. 3657', Set 1st plug at 300' with 40 sx., 2nd plug at 40' with 10 sx., Rathole with 5 sx. Plug was down at 4:30 p.m. 10-30-76. State Plugger - G. R. Bitterstein.

STATE OF KANSAS)
) SS
COUNTY OF SEDGWICK)

Jerry A. Langrehr, Executive Vice President of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the SKINNER #1, C NW SE, Section 9-31S-14W, Barber County, Kansas.

ABERCROMBIE DRILLING, Inc.

BY:


Jerry A. Langrehr, Exec. V.P.

scribed and sworn to before me, a Notary Public, in and for the aforesaid county and
as of this 3rd day of November, 1976