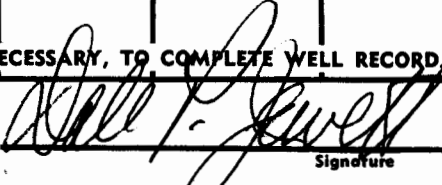


Operator Gould Oil, Inc., & Logo, Inc.		DESIGNATE TYPE OF COMP.: OIL, GAS, DRY HOLE, SWDW, ETC.: Dry and Abandoned	
Well No. 2	Lease Name Thunderbird Ranch #2		
S 19 T 31S R 14W			
WELL LOG Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.		SHOW GEOLOGICAL MARKERS, LOGS RUN, OR OTHER DESCRIPTIVE INFORMATION.	
FORMATION DESCRIPTION, CONTENTS, ETC.	TOP	BOTTOM	NAME
Ran Dresser-Atlas Dual Induction Log & Gamma Ray Compensated Density, Compensated Neutron Log. <u>DST #1:</u> 4506' - 4521' (30"-60"-60"-60") Viola. GTS in 30", gauged 36 MCFD in 90", Recovered 60' SGC Mud + 30' SGO CM IFP = 54# - 54# ISIP = 615# FFP = 75# - 64# FSIP = 615# <u>DST #2:</u> 4651' - 4662' (30"-60"-60"-60") Simpson. Strong blow through-out, Recovered 1300' GIP, 90' GOCM, 60' SGO CM, 720' GSW IFP = 151# - 248# ISIP = 1668# FFP = 324# - 432# FSIP = 1668# BHT = 130° <u>DST #3:</u> 4768' - 4778' (30"-45"-30"-45") Arbuckle. Weak blow through-out, Recovered 30' SOGCWM, 240' GCSW (30,000 ppm-Cl ₂) IFP = 43# - 75# ISIP = 1646# FFP = 108# - 118# FSIP = 1603#			
USE ADDITIONAL SHEETS, IF NECESSARY, TO COMPLETE WELL RECORD.			
Date Received	 Signature Dale P. Jewett Vice-President Title November 5, 1981 Date		