

WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas


15-31-16W

Company- F. KIRK JOHNSON  
Farm- Robbins Ranch No. 1

SEC. 15 T. 31 R. 16W  
NW NW SE

Total Depth. 5025  
Comm. 11-9-54 Comp. 11-25-54  
Shot or Treated.  
Contractor. Nye & Snell Drlg.  
Issued. 4-6-55

County Commanche  
KANSAS

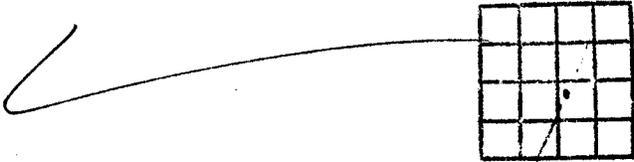

Elevation. 2050 D.E.

CASING:  
8 5/8" 299'

Production. Dry

Figures indicate Bottom of Formations.

shale & clay	110
shale & red rock	225
shale	285
anhyd.	300
red bed	1320
lime	1370
red bed & shells	1950
shale & anhyd. strks	2085
shale	2195
lime & shells	2290
anhyd., shale & lime	2370
shale, lime, gyp	2515
shale & red rock	2595
chert, shale, lime	2695
shale & lime	2780
red rock & shale	2886
shale & lime	3150
lime	3240
lime & shale	3676
lime & shale strks	3730
lime	3885
lime & shale	3976
lime	4045
shale & lime	4125
lime, shale & Douglas	
sand	4225
sdv shale	4325
K.C. lime	4345
lime	4475
lime & shale	4530
lime	4630
shale & lime	4740
lime	4980
lime & chert	5025
Total Depth	

Tops:	
Heebner	4133
Toronto	4150
Douglas	4174
Lansing	4315
Base K.C.	4718