

TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

Prepared For: **Berexco**

PO Box 20380
Wichita KS 67208

ATTN: Ed Grieves

20 31 17 Comanche KS

Peppard #3-20

Start Date: 2007.02.11 @ 21:45:06

End Date: 2007.02.12 @ 12:52:36

Job Ticket #: 27083

DST #: 1

Trilobite Testing, Inc

PO Box 362 Hays, KS 67601

ph: 785-625-4778 fax: 785-625-5620



TRILOBITE
TESTING, INC

DRILL STEM TEST REPORT

Berexco

PO Box 20380
Wichita KS 67208

ATTN: Ed Grieves

Peppard #3-20

20 31 17 Comanche KS

Job Ticket: 27083

DST#: 1

Test Start: 2007.02.11 @ 21:45:06

GENERAL INFORMATION:

Formation: **Altamont A & B**

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 02:57:06

Time Test Ended: 12:52:36

Test Type: Conventional Bottom Hole

Tester: Travy Cushenbery

Unit No: 30

Interval: 4835.00 ft (KB) To 4886.00 ft (KB) (TVD)

Total Depth: 4886.00 ft (KB) (TVD)

Hole Diameter: 7.80 inches Hole Condition: Good

Reference Elevations: 2064.00 ft (KB)

2054.00 ft (CF)

KB to GR/CF: 10.00 ft

Serial #: 6668

Inside

Press@RunDepth: 88.32 psig @ 4841.00 ft (KB)

Start Date: 2007.02.11

End Date:

2007.02.12

Capacity: 7000.00 psig

Last Calib.: 2007.02.12

Start Time: 21:45:11

End Time:

12:52:36

Time On Btm: 2007.02.12 @ 02:56:05

Time Off Btm: 2007.02.12 @ 08:07:06


TEST COMMENT: IF Strong blow BOB in 30 secs. GTS in 9 mins. See gas report

ISI Bled off No blow back

FF Strong blow BOB immediately See gas report.

FSI Bled off Strong blow back BOB

Pressure vs. Time

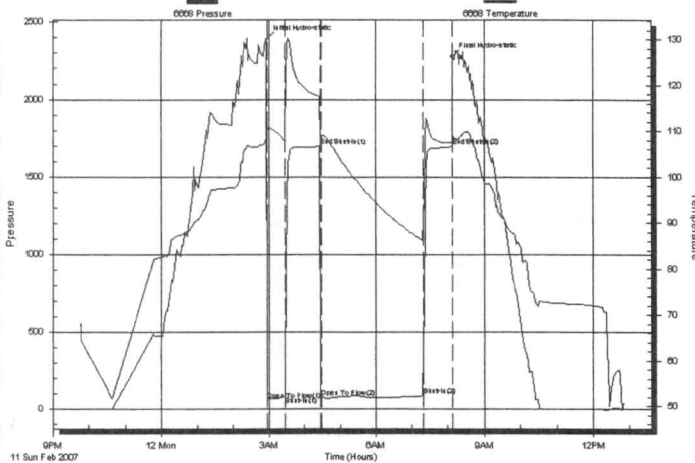

PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	2388.91	108.16	Initial Hydro-static
2	58.90	109.85	Open To Flow (1)
32	82.46	107.64	Shut-In(1)
91	1695.79	117.44	End Shut-In(1)
93	77.09	108.53	Open To Flow (2)
264	88.32	86.24	Shut-In(2)
311	1696.20	107.40	End Shut-In(2)
312	2277.84	107.84	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
279.00	100%M	1.37

Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)
First Gas Rate	0.25	8.00	35.54
Last Gas Rate	0.38	18.00	118.69
Max. Gas Rate	0.38	30.00	162.65



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

TOOL DIAGRAM

Berexco

Peppard #3-20

PO Box 20380
Wichita KS 67208

20 31 17 Comanche KS

Job Ticket: 27083

DST#: 1

ATTN: Ed Grieves

Test Start: 2007.02.11 @ 21:45:06

Tool Information

Drill Pipe:	Length: 4257.00 ft	Diameter: 3.80 inches	Volume: 59.71 bbl	Tool Weight: 2100.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer: 20000.00 lb
Drill Collar:	Length: 557.00 ft	Diameter: 2.25 inches	Volume: 2.74 bbl	Weight to Pull Loose: 110000.0 lb
		Total Volume:	62.45 bbl	Tool Chased 0.00 ft
Drill Pipe Above KB:	2.00 ft			String Weight: Initial 92000.00 lb
Depth to Top Packer:	4835.00 ft			Final 90000.00 lb
Depth to Bottom Packer:	ft			
Interval between Packers:	57.00 ft			
Tool Length:	80.00 ft			
Number of Packers:	2	Diameter: 6.75 inches		
Tool Comments:				

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
------------------	-------------	------------	----------	------------	----------------

Shut In Tool	5.00			4817.00	
Hydraulic tool	5.00			4822.00	
Jars	5.00			4827.00	
Safety Joint	3.00			4830.00	
Packer	5.00			4835.00	23.00 Bottom Of Top Packer
Packer - Shale	6.00			4841.00	
Recorder	0.00	6668	Inside	4841.00	
Perforations	6.00			4847.00	
Change Over Sub	1.00			4848.00	
Drill Pipe	31.00			4879.00	
Change Over Sub	1.00			4880.00	
Perforations	10.00			4890.00	
Recorder	0.00	13266	Outside	4890.00	
Bullnose	2.00			4892.00	57.00 Anchor Tool

Total Tool Length: 80.00



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

FLUID SUMMARY

Berexco

Peppard #3-20

PO Box 20380
Wichita KS 67208

20 31 17 Comanche KS

Job Ticket: 27083

DST#: 1

ATTN: Ed Grieves

Test Start: 2007.02.11 @ 21:45:06

Mud and Cushion Information

Mud Type: Gel Chem

Cushion Type:

Oil API:

deg API

Mud Weight: 9.00 lb/gal

Cushion Length:

ft

Water Salinity:

ppm

Viscosity: 50.00 sec/qt

Cushion Volume:

bbl

Water Loss: 9.57 in³

Gas Cushion Type:

Resistivity: ohm.m

Gas Cushion Pressure:

psig

Salinity: 5000.00 ppm

Filter Cake: 0.20 inches

Recovery Information

Recovery Table

Length ft	Description	Volume bbl
279.00	100%M	1.372

Total Length: 279.00 ft

Total Volume: 1.372 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0

Serial #:

Laboratory Name:

Laboratory Location:

Recovery Comments:



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

GAS RATES

Berexco

Peppard #3-20

PO Box 20380
Wichita KS 67208

20 31 17 Comanche KS

Job Ticket: 27083

DST#: 1

ATTN: Ed Grieves

Test Start: 2007.02.11 @ 21:45:06

Gas Rates Information

Temperature: 59 deg C
Relative Density: 0.65
Z Factor: 0.8

Gas Rates Table

Flow Period	Elapsed Time	Choke (mm)	Pressure (kPaa)	Gas Rate (m³/d)
1	15	0.25	8.00	35.54
1	15	0.25	8.00	35.54
1	20	0.25	12.00	41.88
1	30	0.25	19.00	52.99
2	10	0.38	12.00	96.71
2	20	0.38	16.00	111.36
2	30	0.38	30.00	162.65
2	40	0.38	17.00	115.03
2	50	0.38	18.00	118.69

Serial #: 6668


Inside

Berexco

20 31 17 Comanche KS

DST Test Number: 1

Pressure vs. Time

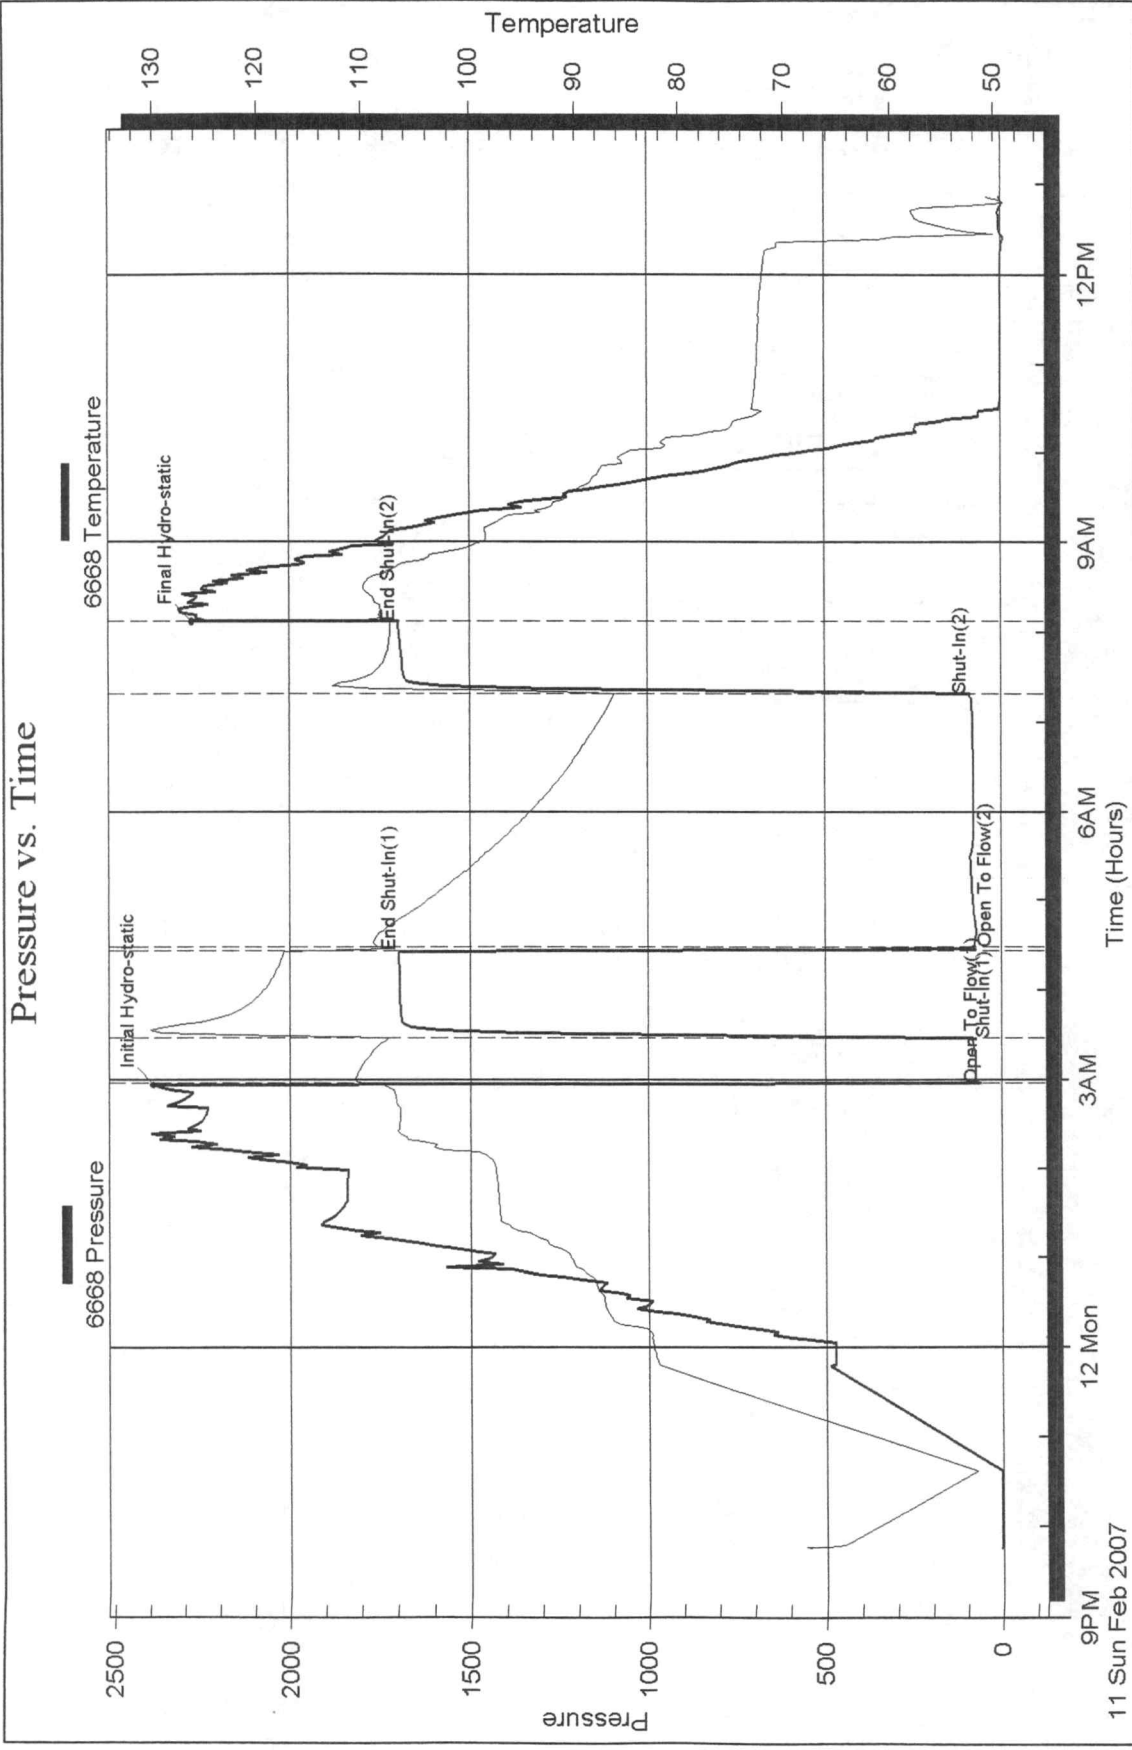



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

Prepared For: **Berexco**

PO Box 20380
Wichita KS 67208

ATTN: Ed Grieves

20 31 17 Comanche KS

Peppard #3-20

Start Date: 2007.02.13 @ 02:49:24

End Date: 2007.02.14 @ 01:01:39

Job Ticket #: 27084

DST #: 2

Trilobite Testing, Inc

PO Box 362 Hays, KS 67601

ph: 785-625-4778 fax: 785-625-5620



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

Berexco

PO Box 20380
Wichita KS 67208

ATTN: Ed Grieves

Peppard #3-20

20 31 17 Comanche KS

Job Ticket: 27084

DST#: 2

Test Start: 2007.02.13 @ 02:49:24

GENERAL INFORMATION:

Formation: **Miss.**

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 15:29:24

Time Test Ended: 01:01:39

Test Type: Conventional Bottom Hole

Tester: Travy Cushenbery

Unit No: 30

Interval: 4967.00 ft (KB) To 5020.00 ft (KB) (TVD)

Total Depth: 5020.00 ft (KB) (TVD)

Hole Diameter: 7.80 inches Hole Condition: Good

Reference Elevations: 2064.00 ft (KB)

2054.00 ft (CF)

KB to GR/CF: 10.00 ft

Serial #: 6668 Inside

Press@RunDepth: psig @ 4967.00 ft (KB)

Start Date: 2007.02.13

End Date:

2007.02.14

Capacity: 7000.00 psig

Last Calib.: 2007.02.15

Start Time: 02:49:29


End Time:

01:01:38

Time On Btm: 2007.02.13 @ 15:29:09

Time Off Btm: 2007.02.13 @ 17:09:24

TEST COMMENT: IF Strong blow Packers failed Picked up Reset with more weight Packers failed Misrun

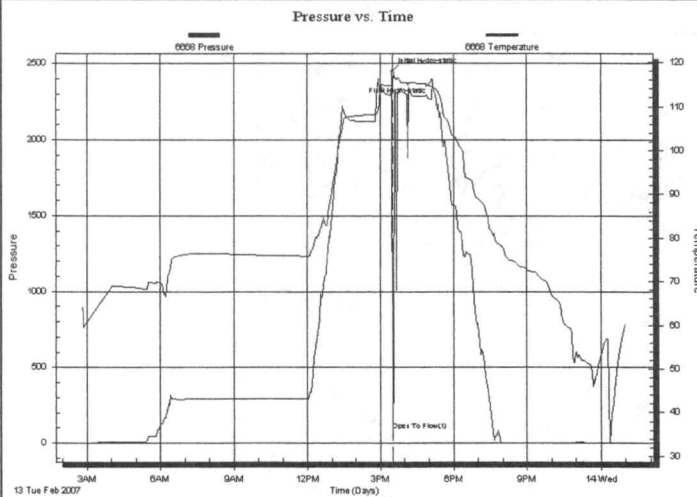

PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	2445.41	114.93	Initial Hydro-static
1	82.34	114.56	Open To Flow (1)
101	2392.07	114.53	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)

Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)
--	----------------	-----------------	------------------



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

TOOL DIAGRAM

Berexco

PO Box 20380
Wichita KS 67208

ATTN: Ed Grieves

Peppard #3-20

20 31 17 Comanche KS

Job Ticket: 27084

DST#: 2

Test Start: 2007.02.13 @ 02:49:24

Tool Information

Drill Pipe:	Length: 4413.00 ft	Diameter: 3.80 inches	Volume: 61.90 bbl	Tool Weight: 2100.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer: 20000.00 lb
Drill Collar:	Length: 557.00 ft	Diameter: 2.25 inches	Volume: 2.74 bbl	Weight to Pull Loose: 170000.0 lb
		Total Volume: 64.64 bbl		Tool Chased 2.00 ft
Drill Pipe Above KB:	32.00 ft			String Weight: Initial 90000.00 lb
Depth to Top Packer:	4967.00 ft			Final lb
Depth to Bottom Packer:	ft			
Interval between Packers:	53.00 ft			
Tool Length:	82.00 ft			
Number of Packers:	2	Diameter: 7.80 inches		

Tool Comments:

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
Shut In Tool	5.00			4943.00	
Hydraulic tool	5.00			4948.00	
Jars	5.00			4953.00	
Safety Joint	3.00			4956.00	
Packer	5.00			4961.00	29.00 Bottom Of Top Packer
Packer	6.00			4967.00	
Recorder	0.00	6668	Inside	4967.00	
Perforations	8.00			4975.00	
Change Over Sub	1.00			4976.00	
Drill Pipe	31.00			5007.00	
Change Over Sub	1.00			5008.00	
Perforations	10.00			5018.00	
Recorder	0.00	13266	Outside	5018.00	
Bullnose	2.00			5020.00	53.00 Bottom Packers & Anchor

Total Tool Length: 82.00



TRILOBITE
TESTING, INC

DRILL STEM TEST REPORT

FLUID SUMMARY

Berexco

Peppard #3-20

PO Box 20380
Wichita KS 67208

20 31 17 Comanche KS

Job Ticket: 27084

DST#: 2

ATTN: Ed Grieves

Test Start: 2007.02.13 @ 02:49:24

Mud and Cushion Information

Mud Type: Gel Chem

Cushion Type:

Oil API:

deg API

Mud Weight: 9.00 lb/gal

Cushion Length:

ft

Water Salinity:

ppm

Viscosity: 48.00 sec/qt

Cushion Volume:

bbl

Water Loss: 8.78 in³

Gas Cushion Type:

Resistivity: ohm.m

Gas Cushion Pressure:

psig

Salinity: 6500.00 ppm

Filter Cake: 0.20 inches

Recovery Information

Recovery Table

Length ft	Description	Volume bbl

Total Length:

ft

Total Volume:

bbl

Num Fluid Samples: 0

Num Gas Bombs: 0


Serial #:


Laboratory Name:

Laboratory Location:

Recovery Comments:

Pressure vs. Time

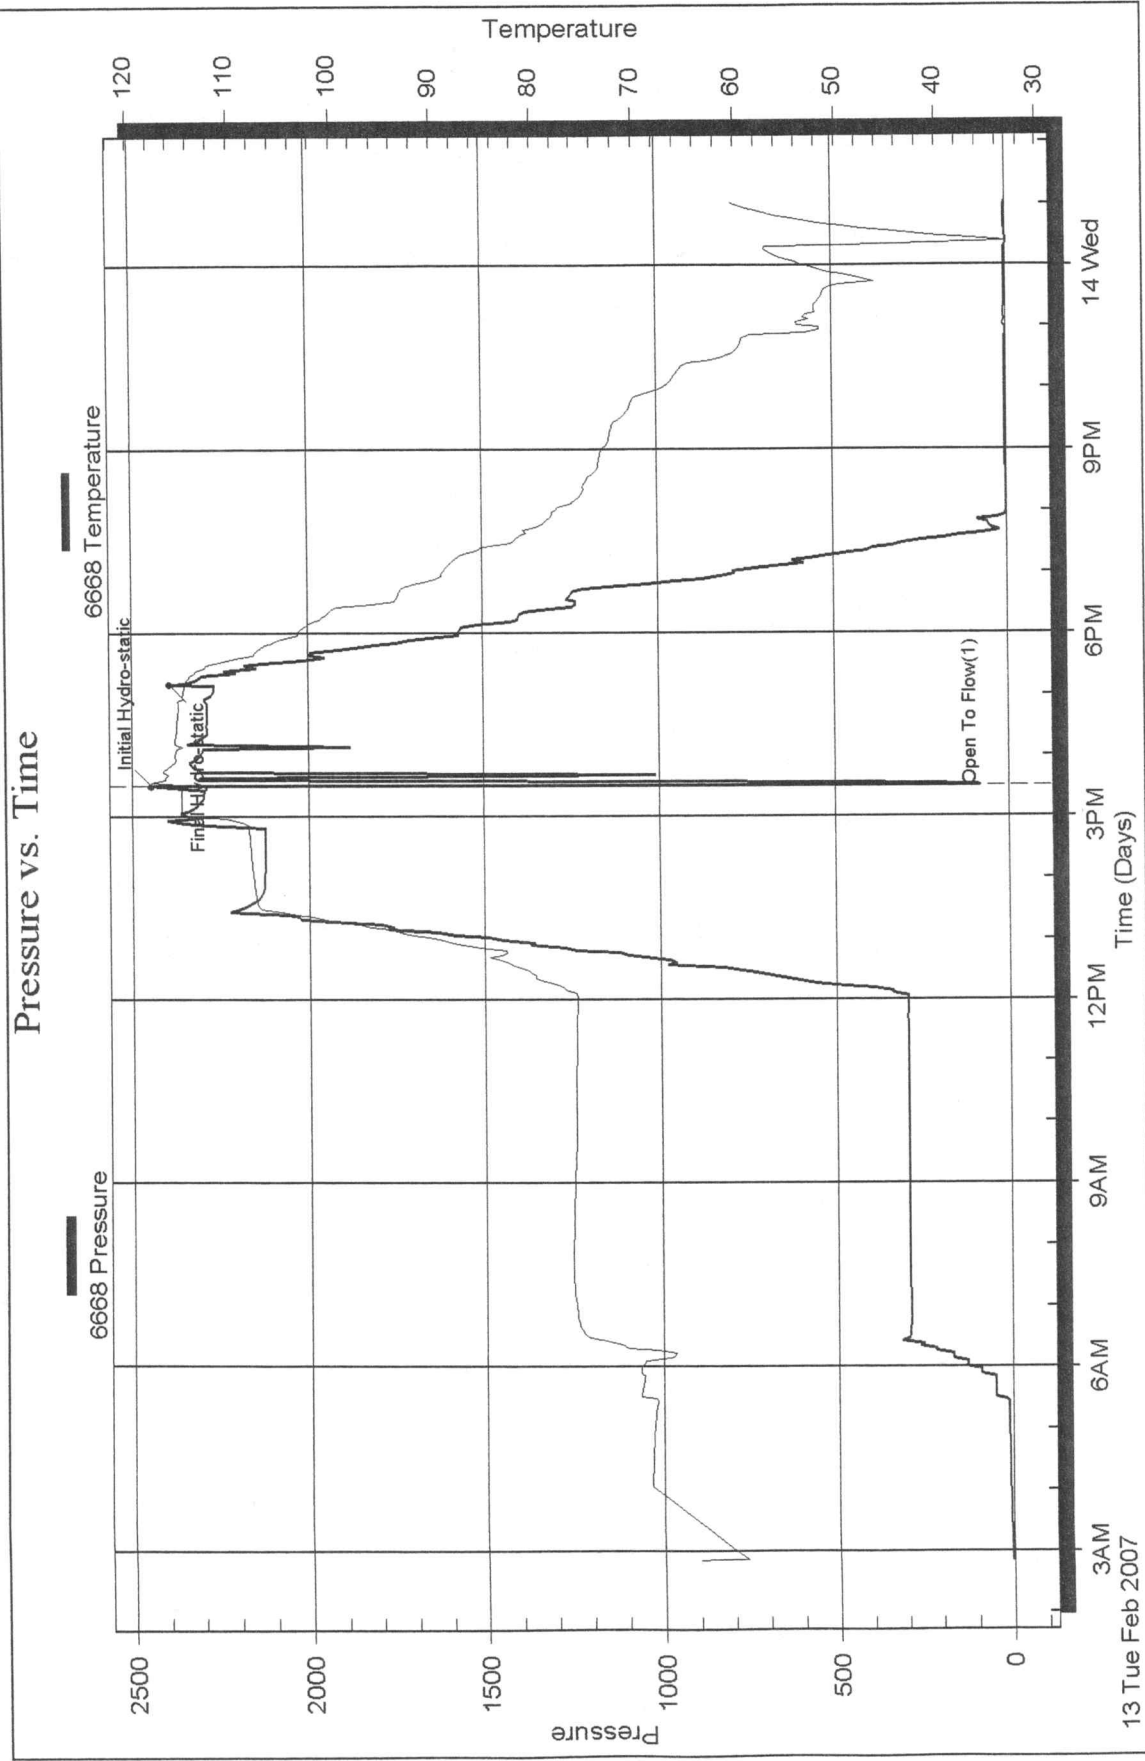



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

Prepared For: **Berexco**

PO Box 20380
Wichita KS 67208

ATTN: Ed Grieves

20 31 17 Comanche KS

Peppard #3-20

Start Date: 2007.02.16 @ 12:50:41

End Date: 2007.02.17 @ 13:50:41

Job Ticket #: 26951 DST #: 3

Trilobite Testing, Inc

PO Box 362 Hays, KS 67601

ph: 785-625-4778 fax: 785-625-5620



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

Berexco

PO Box 20380
Wichita KS 67208

ATTN: Ed Grieves

Peppard #3-20

20 31 17 Comanche KS

Job Ticket: 26951

DST#: 3

Test Start: 2007.02.16 @ 12:50:41

GENERAL INFORMATION:

Formation: **Miss.**

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 03:42:41

Time Test Ended: 13:50:41

Test Type: Conventional Bottom Hole

Tester: Zach Stover

Unit No: 23

Interval: **5001.00 ft (KB) To 5025.00 ft (KB) (TVD)**

Total Depth: 5025.00 ft (KB) (TVD)

Hole Diameter: 7.80 inches Hole Condition: Fair

Reference Elevations: 2064.00 ft (KB)

2054.00 ft (CF)

KB to GR/CF: 10.00 ft

Serial #: 8289

Inside

Press@RunDepth: 113.57 psig @ 5002.00 ft (KB)

Start Date: 2007.02.16

End Date:

2007.02.17

Start Time: 12:50:46

End Time:

13:50:40

Capacity: 7000.00 psig

Last Calib.: 2007.02.17

Time On Btm: 2007.02.17 @ 03:41:11


Time Off Btm: 2007.02.17 @ 08:14:10

TEST COMMENT: IF Built to strong blow BOB in 25 min.

ISI No blow

FF Fair blow Built to 12" in 60 min.

FSI No blow

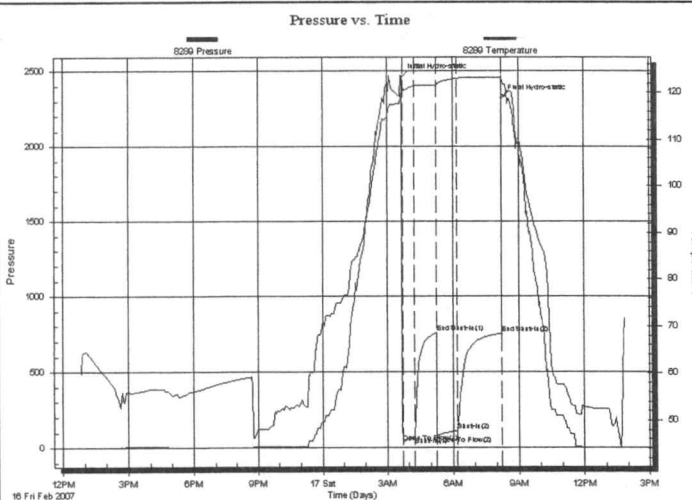

PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	2458.13	120.50	Initial Hydro-static
2	36.63	120.07	Open To Flow (1)
34	73.90	121.41	Shut-In (1)
94	757.29	121.58	End Shut-In (1)
94	81.03	121.32	Open To Flow (2)
151	113.57	122.97	Shut-In (2)
273	753.54	123.09	End Shut-In (2)
273	2318.84	123.59	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
186.00	GSY MCW 5%G 50%W 45%M	0.91

Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)
--	----------------	-----------------	------------------



TRILOBITE
TESTING, INC

DRILL STEM TEST REPORT

TOOL DIAGRAM

Berexco

Peppard #3-20

PO Box 20380
Wichita KS 67208

20 31 17 Comanche KS

Job Ticket: 26951

DST#: 3

ATTN: Ed Grieves

Test Start: 2007.02.16 @ 12:50:41

Tool Information

Drill Pipe:	Length: 4445.00 ft	Diameter: 3.80 inches	Volume: 62.35 bbl	Tool Weight:	2100.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer:	20000.00 lb
Drill Collar:	Length: 558.00 ft	Diameter: 2.25 inches	Volume: 2.74 bbl	Weight to Pull Loose:	110000.0 lb
		Total Volume:	65.09 bbl	Tool Chased	0.00 ft
Drill Pipe Above KB:	29.00 ft			String Weight: Initial	88000.00 lb
Depth to Top Packer:	5001.00 ft			Final	88000.00 lb
Depth to Bottom Packer:	ft				
Interval between Packers:	24.00 ft				
Tool Length:	51.00 ft				
Number of Packers:	2	Diameter:	6.75 inches		
Tool Comments:					

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
Change Over Sub	1.00			4975.00	
Shut In Tool	5.00			4980.00	
Hydraulic tool	5.00			4985.00	
Jars	5.00			4990.00	
Safety Joint	2.00			4992.00	
Packer	4.00			4996.00	27.00 Bottom Of Top Packer
Packer	5.00			5001.00	
Stubb	1.00			5002.00	
Recorder	0.00	8289	Inside	5002.00	
Perforations	18.00			5020.00	
Recorder	0.00	13789	Outside	5020.00	
Bullnose	5.00			5025.00	24.00 Bottom Packers & Anchor

Total Tool Length: 51.00



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

FLUID SUMMARY

Berexco

Peppard #3-20

PO Box 20380
Wichita KS 67208

20 31 17 Comanche KS

Job Ticket: 26951

DST#: 3

ATTN: Ed Grieves

Test Start: 2007.02.16 @ 12:50:41

Mud and Cushion Information

Mud Type: Gel Chem

Cushion Type:

Oil API:

deg API

Mud Weight: 9.00 lb/gal

Cushion Length:

ft

Water Salinity:

ppm

Viscosity: 53.00 sec/qt

Cushion Volume:

bbl

Water Loss: 11.16 in³

Gas Cushion Type:

Resistivity: ohm.m

Gas Cushion Pressure:

psig

Salinity: 9500.00 ppm

Filter Cake: 0.20 inches

Recovery Information

Recovery Table

Length ft	Description	Volume bbl
186.00	GSY MCW 5%G 50%W 45%M	0.915

Total Length: 186.00 ft

Total Volume: 0.915 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0


Serial #:

Laboratory Name:

Laboratory Location:

Recovery Comments:

Pressure vs. Time

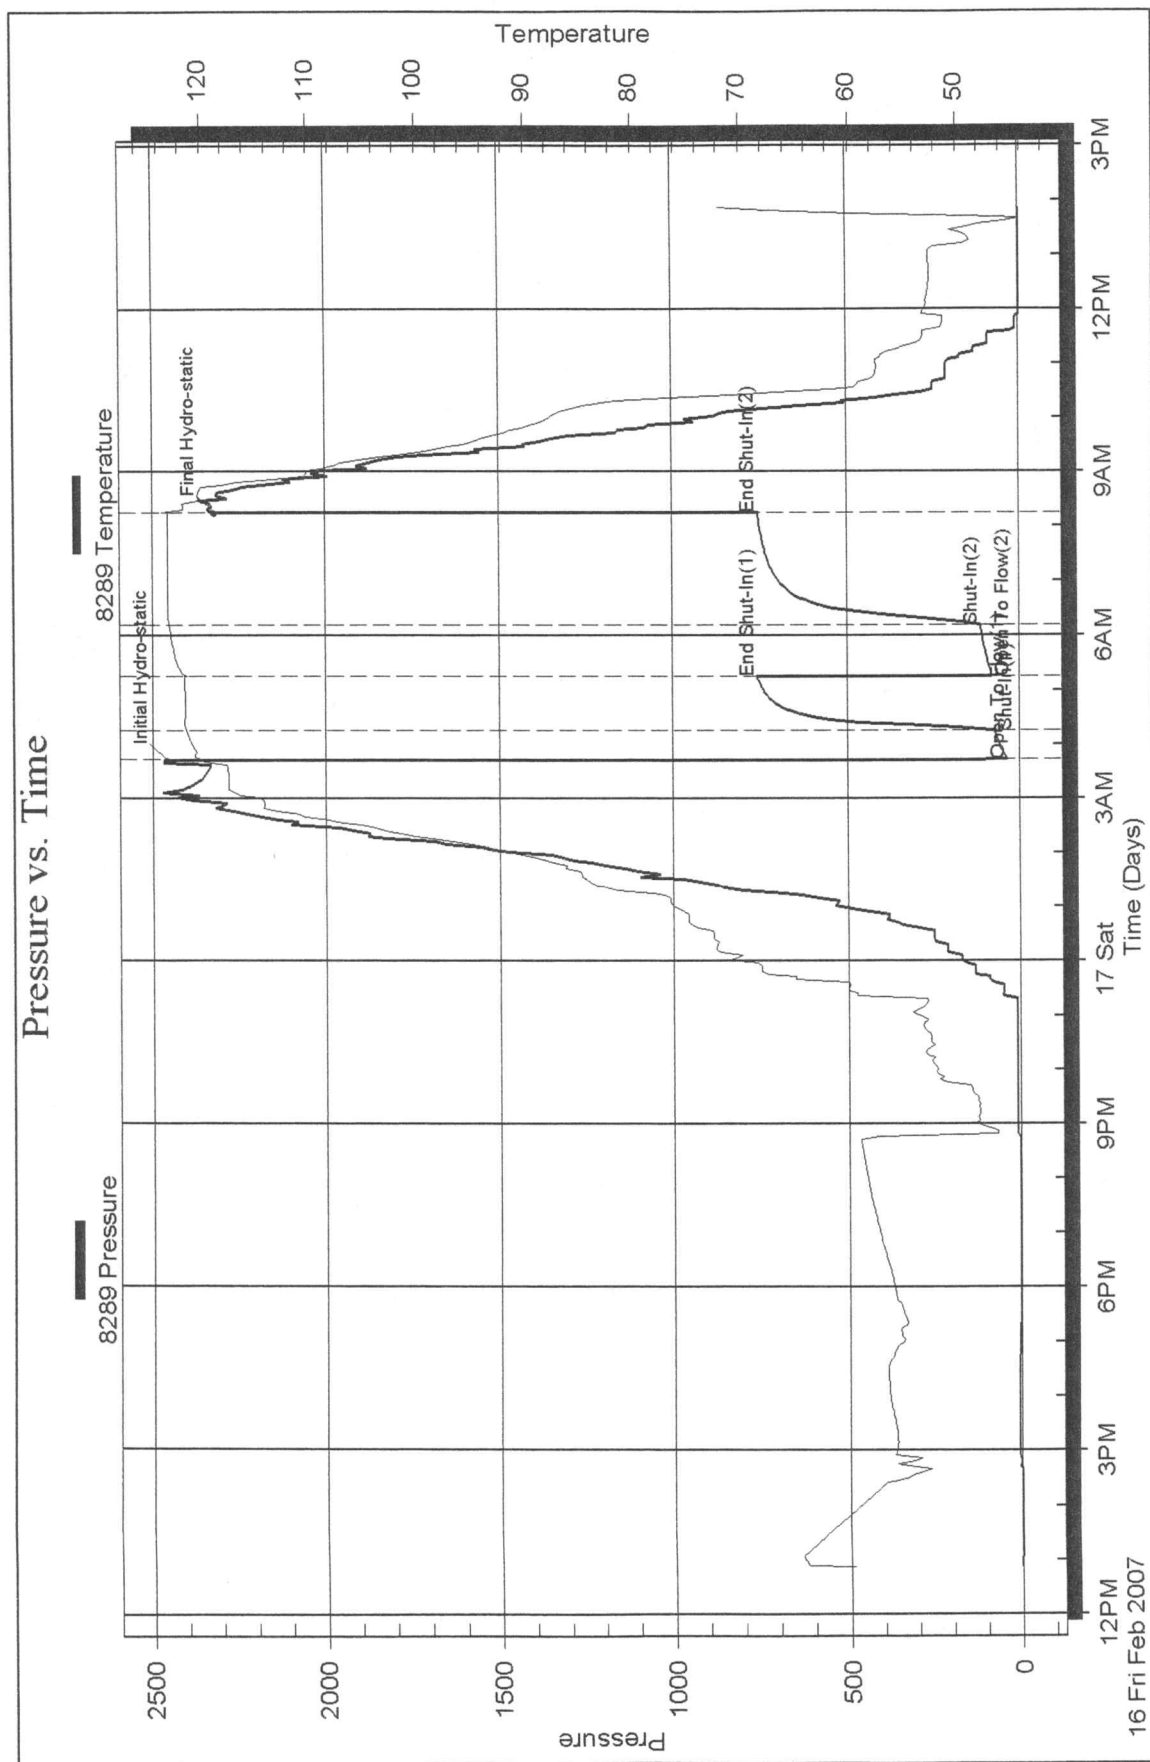



DRILL STEM TEST REPORT

Prepared For: **Berexco**

PO Box 20380
Wichita KS 67208

ATTN: Ed Grieves

20 31 17 Comanche KS

Peppard #3-20

Start Date: 2007.02.18 @ 21:00:43

End Date: 2007.02.19 @ 11:18:43

Job Ticket #: 24482 DST #: 4

Trilobite Testing, Inc

PO Box 362 Hays, KS 67601

ph: 785-625-4778 fax: 785-625-5620



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

Berexco

PO Box 20380
Wichita KS 67208

ATTN: Ed Grieves

Peppard #3-20

20 31 17 Comanche KS

Job Ticket: 24482

DST#: 4

Test Start: 2007.02.18 @ 21:00:43

GENERAL INFORMATION:

Formation:

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 02:14:58

Time Test Ended: 11:18:43

Test Type: Conventional Bottom Hole

Tester: Harley Davidson

Unit No: 33

Interval: 5032.00 ft (KB) To 5055.00 ft (KB) (TVD)

Total Depth: 5055.00 ft (KB) (TVD)

Hole Diameter: 7.80 inches Hole Condition: Fair

Reference Elevations: 2064.00 ft (KB)

2054.00 ft (CF)

KB to GR/CF: 10.00 ft

Serial #: 6751

Inside

Press@RunDepth: 58.48 psig @ 5034.00 ft (KB)

Start Date: 2007.02.18

End Date:

2007.02.19

Start Time: 21:00:44

End Time:

11:18:43


Capacity: 7000.00 psig

Last Calib.: 1899.12.30

Time On Btm: 2007.02.19 @ 02:13:28

Time Off Btm: 2007.02.19 @ 06:41:28

TEST COMMENT: IF Good building blow BOB 27 min. NO GTS
ISI NO BB
FF Good building blow BOB 25 min NO GTS
FSI NO BB

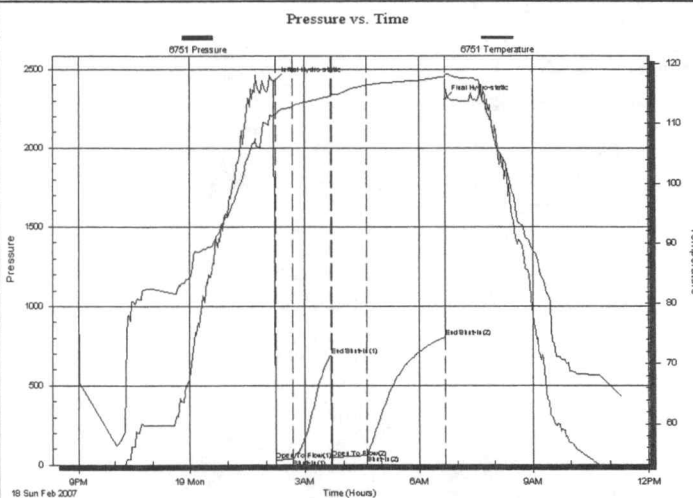

PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	2423.50	111.35	Initial Hydro-static
2	28.15	111.52	Open To Flow (1)
28	38.04	112.87	Shut-In(1)
88	689.55	114.53	End Shut-In(1)
89	44.55	114.79	Open To Flow (2)
144	58.48	116.38	Shut-In(2)
268	804.82	117.79	End Shut-In(2)
268	2309.84	118.11	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
0.00	1000 GIP	0.00
90.00	2%G 2%O 96%M	0.44

Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)
--	----------------	-----------------	------------------



TRILOBITE
TESTING, INC

DRILL STEM TEST REPORT

TOOL DIAGRAM

Berexco

Peppard #3-20

PO Box 20380
Wichita KS 67208

20 31 17 Comanche KS

Job Ticket: 24482

DST#: 4

ATTN: Ed Grieves

Test Start: 2007.02.18 @ 21:00:43

Tool Information

Drill Pipe:	Length: 4472.00 ft	Diameter: 3.80 inches	Volume: 62.73 bbl	Tool Weight:	2000.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer:	25000.00 lb
Drill Collar:	Length: 557.00 ft	Diameter: 2.25 inches	Volume: 2.74 bbl	Weight to Pull Loose:	110000.0 lb
			Total Volume: 65.47 bbl	Tool Chased	0.00 ft
Drill Pipe Above KB:	25.00 ft			String Weight: Initial	90000.00 lb
Depth to Top Packer:	5032.00 ft			Final	90000.00 lb
Depth to Bottom Packer:	ft				
Interval between Packers:	23.00 ft				
Tool Length:	51.00 ft				
Number of Packers:	2	Diameter: 6.75 inches			
Tool Comments:					

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
Change Over Sub	1.00			5005.00	
Shut In Tool	5.00			5010.00	
Hydraulic tool	5.00			5015.00	
Jars	5.00			5020.00	
Safety Joint	3.00			5023.00	
Packer	5.00			5028.00	28.00 Bottom Of Top Packer
Packer	4.00			5032.00	
Stubb	1.00			5033.00	
Perforations	1.00			5034.00	
Recorder	0.00	6751	Inside	5034.00	
Perforations	17.00			5051.00	
Recorder	0.00	11018	Inside	5051.00	
Bullnose	4.00			5055.00	23.00 Bottom Packers & Anchor
Total Tool Length:		51.00			



TRILOBITE
TESTING, INC.

DRILL STEM TEST REPORT

FLUID SUMMARY

Berexco

Peppard #3-20

PO Box 20380
Wichita KS 67208

20 31 17 Comanche KS

Job Ticket: 24482

DST#: 4

ATTN: Ed Grieves

Test Start: 2007.02.18 @ 21:00:43

Mud and Cushion Information

Mud Type: Gel Chem

Mud Weight: 9.00 lb/gal

Viscosity: 52.00 sec/qt

Water Loss: 8.77 in³

Resistivity: ohm.m

Salinity: 12000.00 ppm

Filter Cake: 0.20 inches

Cushion Type:

Cushion Length:

Cushion Volume:

Gas Cushion Type:

Gas Cushion Pressure:

ft

bbl

psig

Oil API:

Water Salinity:

deg API

ppm

Recovery Information

Recovery Table

Length ft	Description	Volume bbl
0.00	1000 GIP	0.000
90.00	2%G 2%O 96%M	0.443

Total Length: 90.00 ft

Total Volume: 0.443 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0

Serial #:

Laboratory Name:

Laboratory Location:

Recovery Comments:

Serial #: 6751

Inside

Berexco

20 31 17 Comanche KS

DST Test Number: 4

Pressure vs. Time

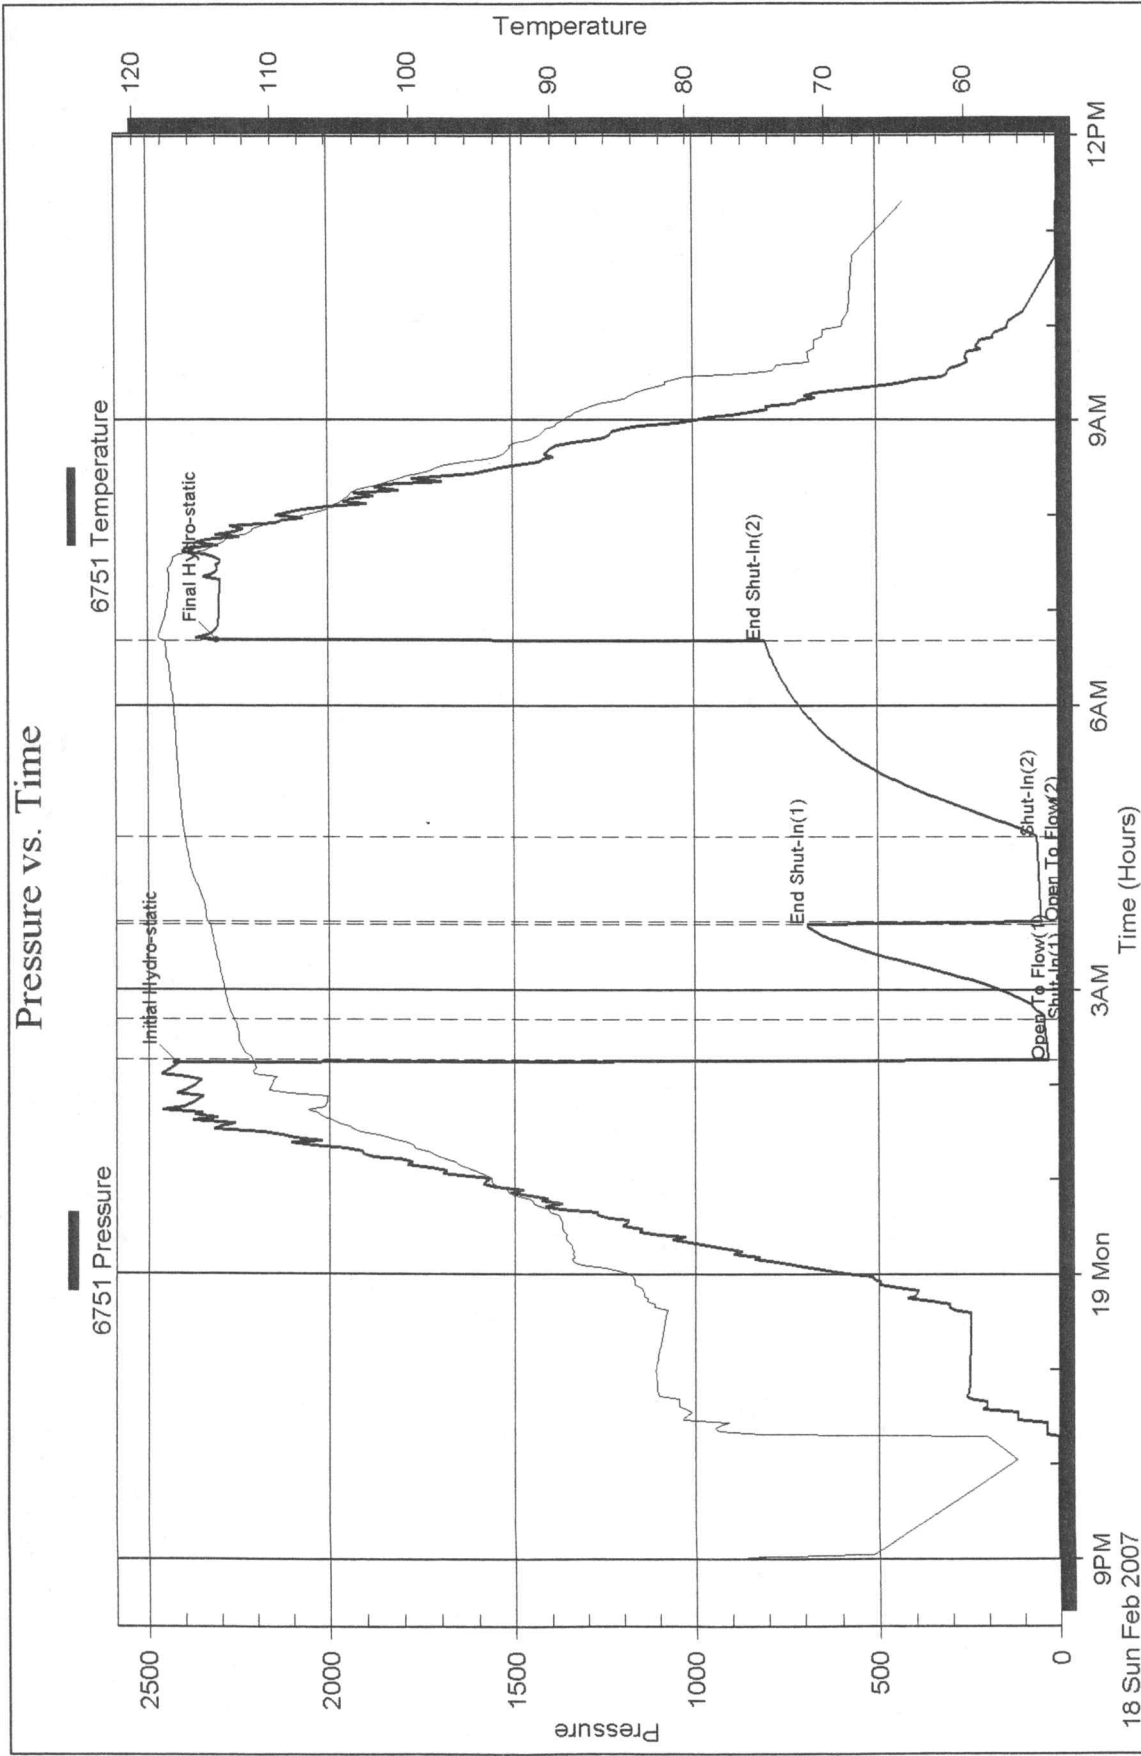


CHART PAGE

This is a photocopy of the actual AK-1 recorder chart.

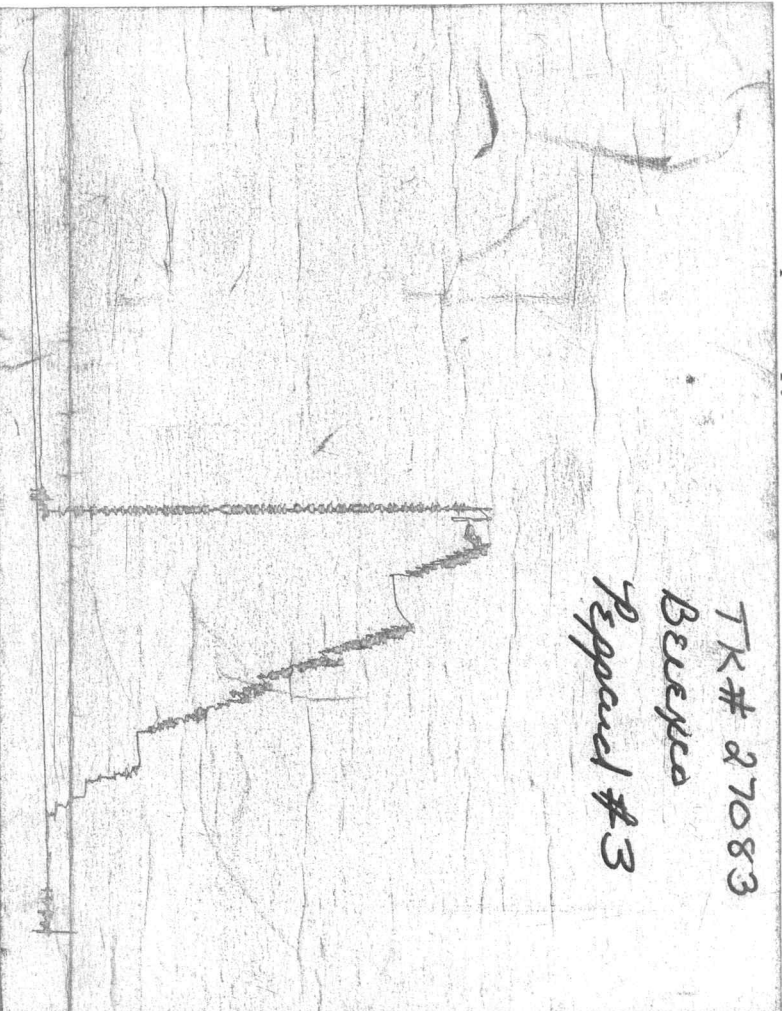


CHART PAGE

This is a photocopy of the actual AK-1 recorder chart.


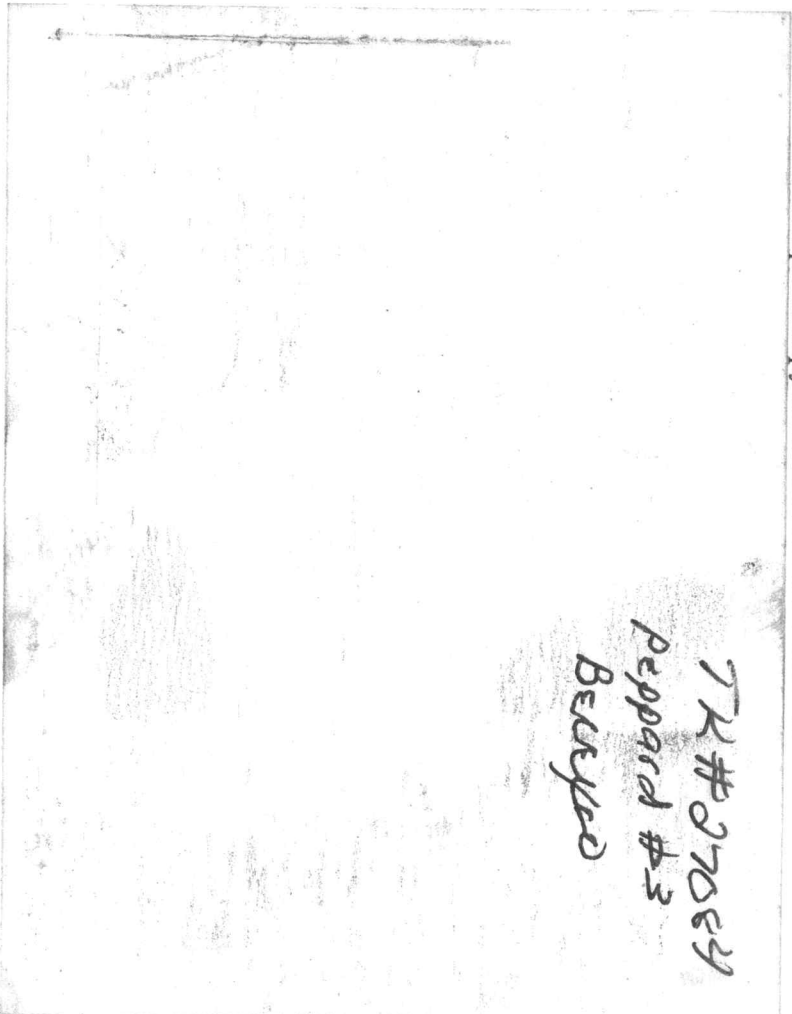


CHART PAGE

This is a photocopy of the actual AK-1 recorder chart.

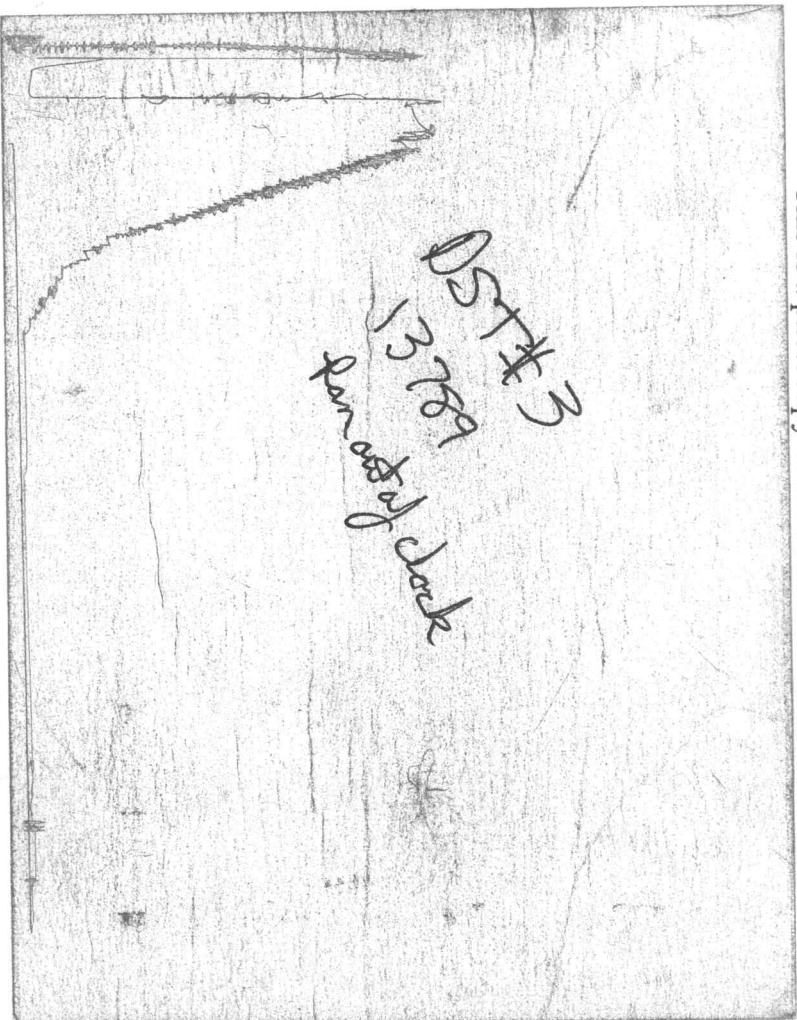

Barredo
Peppard

CHART PAGE

This is a photocopy of the actual AK-1 recorder chart.

