


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas

Company- STEARNS PETROLEUM CO.  
Farm- F. L. Dailey No. 1

SEC. 4 T. 31 R. 21W  
C NE SW

Total Depth. 5254'  
Comm. 11-20-55 Comp. 12-20-55  
Shot or Treated.  
Contractor. Trans Era Petro.  
Issued. 6-2-56

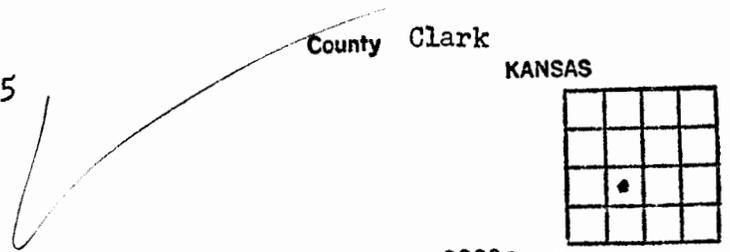

CASING:  
20" 98' cem w/375 sx  
5 1/2" 5205' cem w/125 sx

Elevation. 2223' RB

Production. 25 BOPD

Figures indicate Bottom of Formations.

sand & rock	50
rock	68
sand rock	73
shale grey	120
sand	135
red bed, shale & shells	355
red bed	410
red bed & shale	1225
anhydrite	1243
red bed & shale	1475
shale & shells	1775
shale & lime shells	1865
shale & shells	2070
salt & shale	2170
lime & shale	2400
shale & sand lime	2515
lime gyp pyrite	2590
shale & lime	3055
shale	3225
shale & lime	3311
shale - grey & red	3411 ?
shale	3412
shale & lime	3925
lime	4006
lime & shale	4083
lime, shale & bentonite	4150
lime & shale	4542
lime	4603
lime & shale	4702
lime	4720
lime & shale	4757
lime	4800
lime & shale	4970
lime	5016
lime & shale	5209
lime & shale	5254
Total Depth	

Tops:	
Heebner	4270
Toronto	4287
Base Lime	4452
Kansas City	4469
Base of Kansas City	4929
Cherokee	5071
Mississippi	5169