

**STATE CORPORATION COMMISSION OF KANSAS
OIL & GAS CONSERVATION DIVISION**

**WELL COMPLETION OR RECOMPLETION FORM
ACO-1 WELL HISTORY**

DESCRIPTION OF WELL AND LEASE

Operator: license # 6785
name Robert Schulein
address 1776 Lincoln St., #811
Denver, Colorado 80203
City/State/Zip

Operator Contact Person Robert Schulein
Phone (303) 839-5495

Contractor: license # 9180
name Wildcat Drilling Co.

Wellsite Geologist Douglas H. McGinnis
Phone (316) 267-6065

Describe Type of Completion
☒ New Well ☐ Re-Entry ☐ Workover

☐ Oil ☐ SWD ☐ Temp Abd
☐ Gas ☐ Inj ☐ Delayed Comp.
☒ Dry ☐ Other (Core, Water Supply etc.)

If C/O: old well info as follows:

Operator
Well Name
Comp. Date Old Total Depth

WELL HISTORY

Drilling Method: ☒ Mud Rotary ☐ Air Rotary ☐ Cable
12-4-1984
12-84 12-13-84
Spud Date Date Reached TD Completion Date
4650' RTD
Total Depth PBTD

Amount of Surface Pipe Set and Cemented at 302 feet

Multiple Stage Cementing Collar Used? ☐ Yes ☒ No

If Yes, Show Depth Set feet

If alternate 2 completion, cement circulated
from feet depth to w/ SX cmt

API NO. 15 - 077-21,055

County Harper

C. NW NE Sec. 24 Twp. 31 S Rge. 5 East
(location) West

4620 Ft North from Southeast Corner of Section

1980 Ft West from Southeast Corner of Section

(Note: locate well in section plat below)


Lease Name Drouhard Well# 2-24

Field Name

Producing Formation

Elevation: Ground 1320' KB 1329'

Section Plat

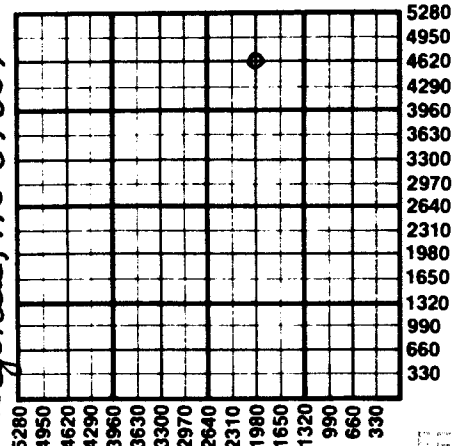

*pond belonging to:
Arthur Drouhard
P.O. 2, Box 50
Argonia, KS 67004*

WATER SUPPLY INFORMATION

Source of Water:

Division of Water Resources Permit #

☐ Groundwater. Ft North From Southeast Corner and
(Well) Ft West From Southeast Corner of

Sec Twp Rge ☐ East ☐ West

☒ Surface Water. Ft North From Southeast Corner and
(Stream, Pond etc.) Ft West From Southeast Corner

C NE/4 Sec 13 Twp 31 S Rge 5 ☐ East ☒ West

☐ Other (explain)

(purchased from city, R.W.D.#)

Disposition of Produced Water: ☐ Disposal
☐ Repressuring

Docket #

INSTRUCTIONS: This form shall be completed in duplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 90 days after completion or recompletion of any well. Rules 82-3-130 and 82-3-107 apply.

Information on side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3-107 for confidentiality in excess of 12 months.

One copy of all wireline logs and drillers time log shall be attached with this form. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells.

SIDE TWO

Operator Name Robert. Schulein..... Lease Name Drouhard.. Well# 2-24 SEC 24 TWP. 31S RGE. 5..... ☐ East ☒ West

WELL LOG

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all drill stem tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface during test. Attach extra sheet if more space is needed. Attach copy of log.

Drill Stem Tests Taken

☒ Yes ☐ No

Samples Sent to Geological Survey

☒ Yes ☐ No

Cores Taken

☐ Yes ☒ No

Formation Description

☒ Log ☐ Sample

Name

Top

Bottom

DST #1: 4500-4600' (Simpson): 30-30-60-60;
rec. 180' mud, 2200' MW. IFP 213-666;
ISIP 1708; FFP 628-1116; FSIP 1708;
BHT 153°.

Name	Top	Bottom
Stalnaker sd	3226'	(-1897)
Kansas City	3508'	(-2179)
Mississippi	4174'	(-2845)
Kinderhook sh	4497'	(-3168)
Simpson sd	4592'	(-3263)
LTD	4649'	

CASING RECORD

☐ new☐ used

Report all strings set - conductor, surface, intermediate, production, etc.

Purpose of string	size hole drilled	size casing set (in O.D.)	weight lbs/ft.	setting depth	type of cement	# sacks used	type and percent additives
Surface	12-1/4	8-5/8	20#	302'	common	215	3% cc., 2% gel.

PERFORATION RECORD

Acid, Fracture, Shot, Cement Squeeze Record

shots per foot	specify footage of each interval perforated	(amount and kind of material used)	Depth

24-31-5W

DRILLERS LOG

#2-24 Drouhard
C NW NE Section 24-31S-5W
Harper County, Kansas

OPERATOR: ROBERT SCHULEIN
1776 Lincoln St., #811
Denver, CO 80203

CONTRACTOR: WILDCAT DRILLING COMPANY
Suite 250, 200 W. Douglas
Wichita, KS 67202

COMMENCED: December 4, 1984

COMPLETED: December 13, 1984

CASING RECORD: 8-5/8" @ 302' w/215 sx common

<u>FROM</u>	<u>TO</u>	<u>DESCRIPTION</u>
0	302	Sand and shale
302	885	Sand
885	1450	Shale
1450	1693	Clay and shale
1693	1980	Shale
1980	2560	Lime and shale
2560	2900	Shale
2900	4650	Lime and shale
4650		Rotary total depth

STATE OF KANSAS)
) ss.
COUNTY OF SEDGWICK)

I hereby certify that the above is a true and correct log to the best of my knowledge and belief.

Donald E. Hunt
Donald E. Hunt

Subscribed and sworn to before me this 17th day of December, 1984.

My appointment expires:
January 20, 1985

Kathleen L. Greger
Kathleen L. Greger, Notary Public

