15-31-9W

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company. RUPP-FERGUSON OIL CO.
Farm. Kennedy No. 1

SEC. 15 T. 31 R. 9W
NW NW SW

Total Depth. 4550
Comm. 6-28-55 Comp. 7-12-55
Shot or Treated.
Contractor. Rupp-Ferguson Oil Co.
Issued. 9-10-55

County Harper

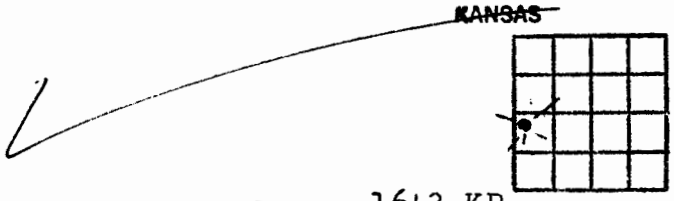

Elevation. 1643 KB

Production. 4,200,000 CFG

CASING:
8 5/8 258' w/ 225 sx cmt.
5 1/2 4505' w/ 125 sx cmt.

Figures Indicate Bottom of Formations.

sand	130
sand & shale	185
red bed	340
red bed & shale	1050
salt	1195
shale & shells	1410
lime & shale	2065
lime & shale streaks	2240
lime & shale	3120
lime	3285
lime & shale	3412
lime	3432
shale & lime	3543
lime, shale & sand	3662
sand	3672
lime	3746
lime & shale	3821
lime	3966
lime & shale	4081
lime	4165
lime & shale	4392
Mississippi	4550
Total Depth	

SCHLUMBERGER TOPS:

Douglas	3570
Lansing-KC	3672
Base KC	4192
Mississippian	4391

DST #1: 4391-4406, open 1½ hrs. gas to surf. 4 min. gauged 458 MCFG, rec. 55' drlg. mud, BHP 1580#

DST #2: 4406-31, open 1 hr. gas to surf 3 min. gauged 1300 MCFG, rec. 205' oil, BHP 1580#

DST #3: 4431-56, open 1½ hrs. gas to surf after tool closed, rec. 35' GCM, BHP 200#

Perf. 4516-20 4 SPF, rec. no fluid,
Perf. 4516-20 2 SPF rec. no fluid.
Acidized 500 gal MCA rec. 300 MCFG & 1/2 BOPH
Frac w/ 1000# sand, well gauged 4200 MCFGPD, no oil