


6-32-10W

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas

Company- GRAMEHART-MILLER OIL CO.
Farm- Dick "A" No. 1

SEC. 6 T. 32 R. 10W
NW NE

Total Depth. 4932'
Comm. 1-16-55 Comp. 2-6-55
Shot or Treated.
Contractor. Graham-Messman-Rinehart Drlg. Co.
Issued. 3-12-55

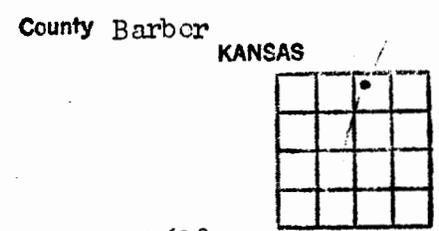

Elevation. 1628' KB

Production. Dry

CASING:

8 5/8" 233' cem w/135 sx
5 1/2" 4490' cem w/75 sx

Figures Indicate Bottom of Formations.

red bed	224
red bed-shells	233
shale	1890
lime-shale	3630
lime-shale-sand	3705
sandy lime-shale	3785
lime-shale	3853
lime	4244
lime-shale	4445
lime-chert	4487
lime-chert-shale	4511
lime	4562
lime-shale-chert	4604
lime	4648
lime-shale	4735
lime	4748
sand-lime	4812
sand	4829
coring (sand)	4852
shale	4878
sand-Arbuckle	4932
Total Depth	

Tops:		Sample Tops:
Hoebner	3601	
Douglas	3627	
Lansing	3785	3786
Mississippi	4430	4431
Kinderhook Shale	4615	4615
Chattanooga Shale	4662	4663
Viola	4715	4717
Simpson Shale	4777	4777
Simpson Sand	4779	4778
Arbuckle	4904	4904