

S

SIDE ONE

*Ind*

R

STATE CORPORATION COMMISSION OF KANSAS  
OIL & GAS CONSERVATION DIVISION

WELL COMPLETION OR RECOMPLETION FORM  
ACO-1 WELL HISTORY

DESCRIPTION OF WELL AND LEASE

Operator: License # ..... 5050  
Name ..... Hummon Corporation  
Address ..... 400 One Main Place  
City/State/Zip ..... Wichita, KS 67202

Purchaser.....

Operator Contact Person ..... Byron E. Hummon, Jr.  
Phone ..... 316/263-8521

Contractor: License # ..... 5148  
Name ..... Big-H Drilling, Inc.

Wellsite Geologist..... Dave Goldak  
Phone..... 316/263-8521

Designate Type of Completion  
 New Well     Re-Entry     Workover  
 Oil     SWD     Temp Abd  
 Gas     Inj     Delayed Comp.  
 Dry     Other (Core, Water Supply etc.)

If ONWO: old well info as follows:  
Operator .....  
Well Name .....  
Comp. Date ..... Old Total Depth.....

WELL HISTORY

Drilling Method:  
 Mud Rotary     Air Rotary     Cable  
11/6/85    11/16/85    11/16/85  
Spud Date    Date Reached TD    Completion Date  
4364           
Total Depth    PBD

Amount of Surface Pipe Set and Cemented at 225 feet  
Multiple Stage Cementing Collar Used?  Yes  No  
If yes, show depth set.....feet  
If alternate 2 completion, cement circulated  
from.....feet depth to.....w/.....SX cmt

API NO. 15-007-22,089

County..... Barber

NW SE NW Sec. 5 Twp. 32S Rge. 11  East  
 West

3630 Ft North from Southeast Corner of Section  
3630 Ft West from Southeast Corner of Section  
(Note: Locate well in section plat below)


Lease Name..... Jones Well #..... 2

Field Name..... Wildcat

Producing Formation.....

Elevation: Ground..... 1526 KB..... 1539

Section Plat

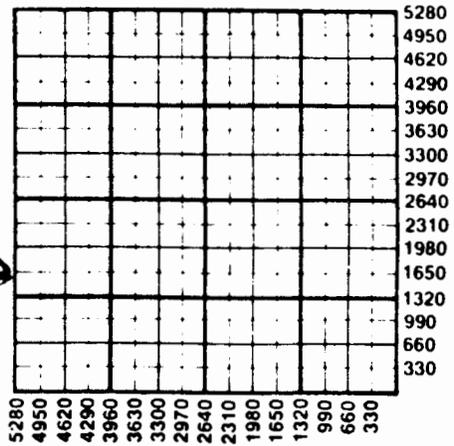

*Geological Survey*  
*BRANCH*

WATER SUPPLY INFORMATION

Disposition of Produced Water:  Disposal  
Docket # .....  Repressuring

Questions on this portion of the ACO-1 call:

Water Resources Board (913) 296-3717

Source of Water:  
Division of Water Resources Permit #.....

Groundwater.....Ft North from Southeast Corner  
(Well) .....Ft West from Southeast Corner of  
Sec Twp Rge  East  West

Surface Water.....Ft North from Southeast Corner  
(Stream, pond etc).....Ft West from Southeast Corner  
Sec Twp Rge  East  West

Other (explain)..... J. & M. Water Hauling  
(purchased from city, R.W.D. #)

INSTRUCTIONS: This form shall be completed in duplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 90 days after completion or recompletion of any well. Rule 82-3-130 and 82-3-107 apply. Information on side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3-107 for confidentiality in excess of 12 months. One copy of all wireline logs and drillers time log shall be attached with this form. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells.

SIDE TWO

Operator Name ..... Hummon Corporation ..... Lease Name..... Jones ..... Well #... 2 .....

Sec. 5 ..... Twp. 32S ..... Rge. 11 .....  East  West ..... County..... Barber .....

WELL LOG

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all drill stem tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface during test. Attach extra sheet if more space is needed. Attach copy of log.

Drill Stem Tests Taken  Yes  No  
 Samples Sent to Geological Survey  Yes  No  
 Cores Taken  Yes  No

Formation Description  
 Log  Sample

DST #1: 3558-3580 SIP 1267/1225 BHT 1129  
 30/60/30/60 FP 63/63 105/116  
 Rec 150' VSGCM HP 1815/1783

DST #2: 3614-3655 SIP 85/63 BHT 1129  
 30/60/30/60 FP 32/32 32/32  
 Rec 10' mud HP 1900/1889

DST #3: 4312-4339 SIP 211/95 BHT 1189  
 45/60/45/90 FP 31/52 31/31  
 Rec 40' mud HP 2207/2186

Name	Top	Bottom
Onaga Sh	2566	-1027
Wabaunsee	2618	-1079
Tarkio	2768	-1229
Elgin	3372	-1833
Heebner	3546	-2007
Douglas Ls	3622	-2083
Douglas Sh	3645	-2106
Lansing	3720	-2181
Mississippi	4325	-2786
LTD	4359	

JAN 06 RECD  
 Geological Survey  
 BRANCH

CASING RECORD <input checked="" type="checkbox"/> New <input type="checkbox"/> Used							
Report all strings set-conductor, surface, intermediate, production, etc.							
Purpose of String	Size Hole Drilled	Size Casing Set (in O.D.)	Weight Lbs/Ft.	Setting Depth	Type of Cement	#Sacks Used	Type and Percent Additives
Surface	12-1/4	8-5/8	N/A	225	common	200	2%gel, 3%CC
PERFORATION RECORD				Acid, Fracture, Shot, Cement Squeeze Record			
Shots Per Foot	Specify Footage of Each Interval Perforated			(Amount and Kind of Material Used)		Depth	
.....	.....			.....		.....	
.....	.....			.....		.....	
.....	.....			.....		.....	
.....	.....			.....		.....	
TUBING RECORD				Liner Run <input type="checkbox"/> Yes <input type="checkbox"/> No			
Date of First Production		Producing Method					

End  
5-32-11W  
P

DRILLERS LOG X

#2 Jones

CASING:	COMPANY:	Hummon Corporation	DESCRIPTION:
8-5/8" @ 225'	CONTRACTOR:	Big-H Drilling, Inc.	NW SE NW
w/ 200sx cement	COMMENCED:	November 6, 1985	Sec. 5-32S-11W
	COMPLETED:	November 16, 1985	ELEVATION: 1539 KB

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Red Beds	0	227	
Red Beds & Shale	227	1015	
Shale & Lime	1015	1756	
Lime & Shale	1756	1983	
Shale & Lime	1983	2404	
Shale	2404	2560	
Shale & Lime	2560	2907	
Lime & Shale	2907	3107	
S' e & Lime	3107	3514	
Lime & Shale	3514	3580	
Shale & Lime	3580	3655	
Lime & Shale	3655	4000	
Lime	4000	4069	
Shale & Lime	4069	4154	
Lime & Shale	4154	4269	
Shale & Lime	4269	4339	
Mississippian	4339	4364	
TD		4364	

JAN 06 REC'D  
L. J. ... Survey  
... HANCH

I certify that this is a true and correct copy of the above log to the best of my knowledge.

Big-H Drilling, Inc.

*Cindy L. Horton*  
Cindy L. Horton

Subscribed and sworn to before me this 20th day of November, 1985.

SANDRA L. MENDOZA  
STATE NOTARY PUBLIC  
SEDGWICK COUNTY, TEXAS  
MY COM. EX. 2/13/86

*Sandra L. Mendoza*  
Notary Public