


Well Name: Sinclair #1 Block 5

Location: NE-SE-NE 22-32^S-13W Barber Co., ks.

Cored Interval: 4386-4426 (Middle Miss. Osage)


Core descr. by
Citrus Sec.

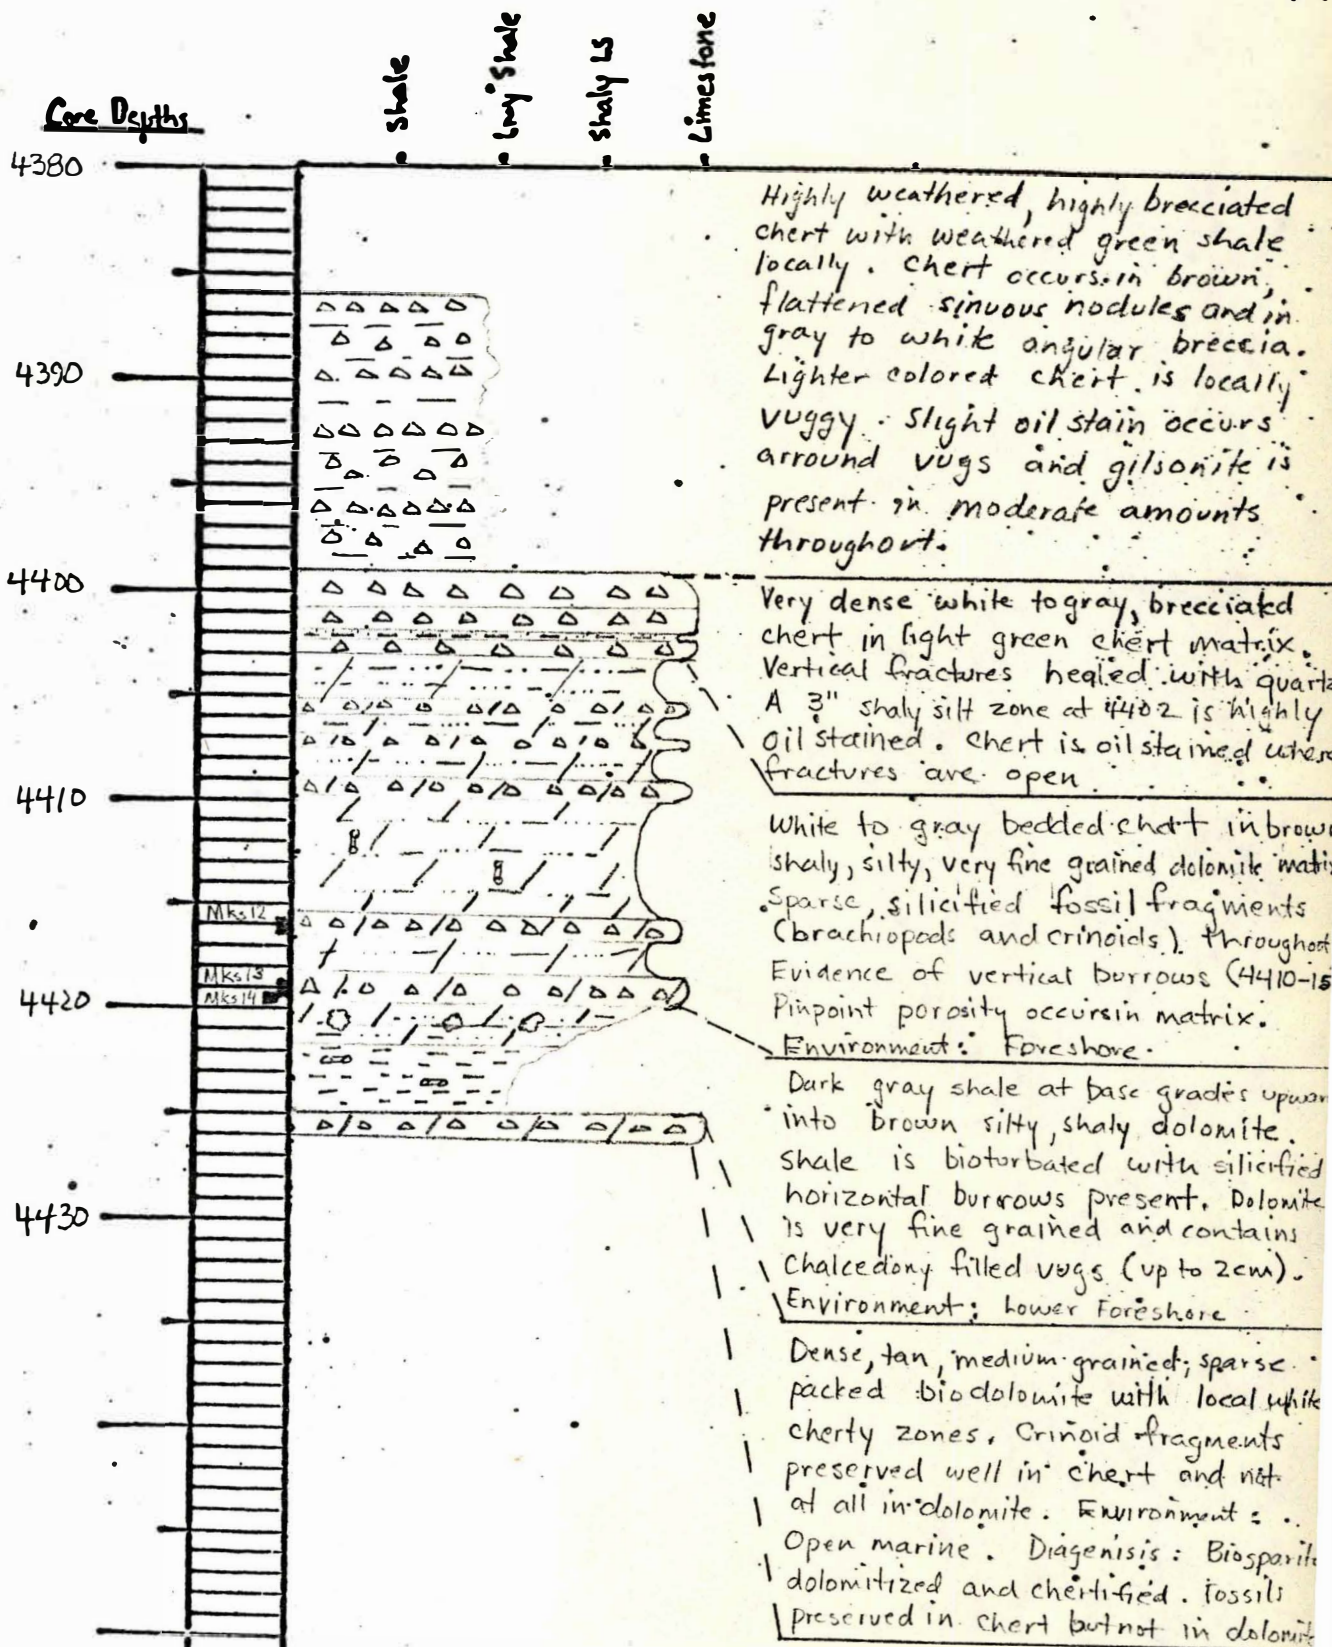

Best Scanned Copy


SO & G. BROOKS 1
BARBER CO., KANS.

SEC. 22 32S 13W
MISSISSIPPI SAND

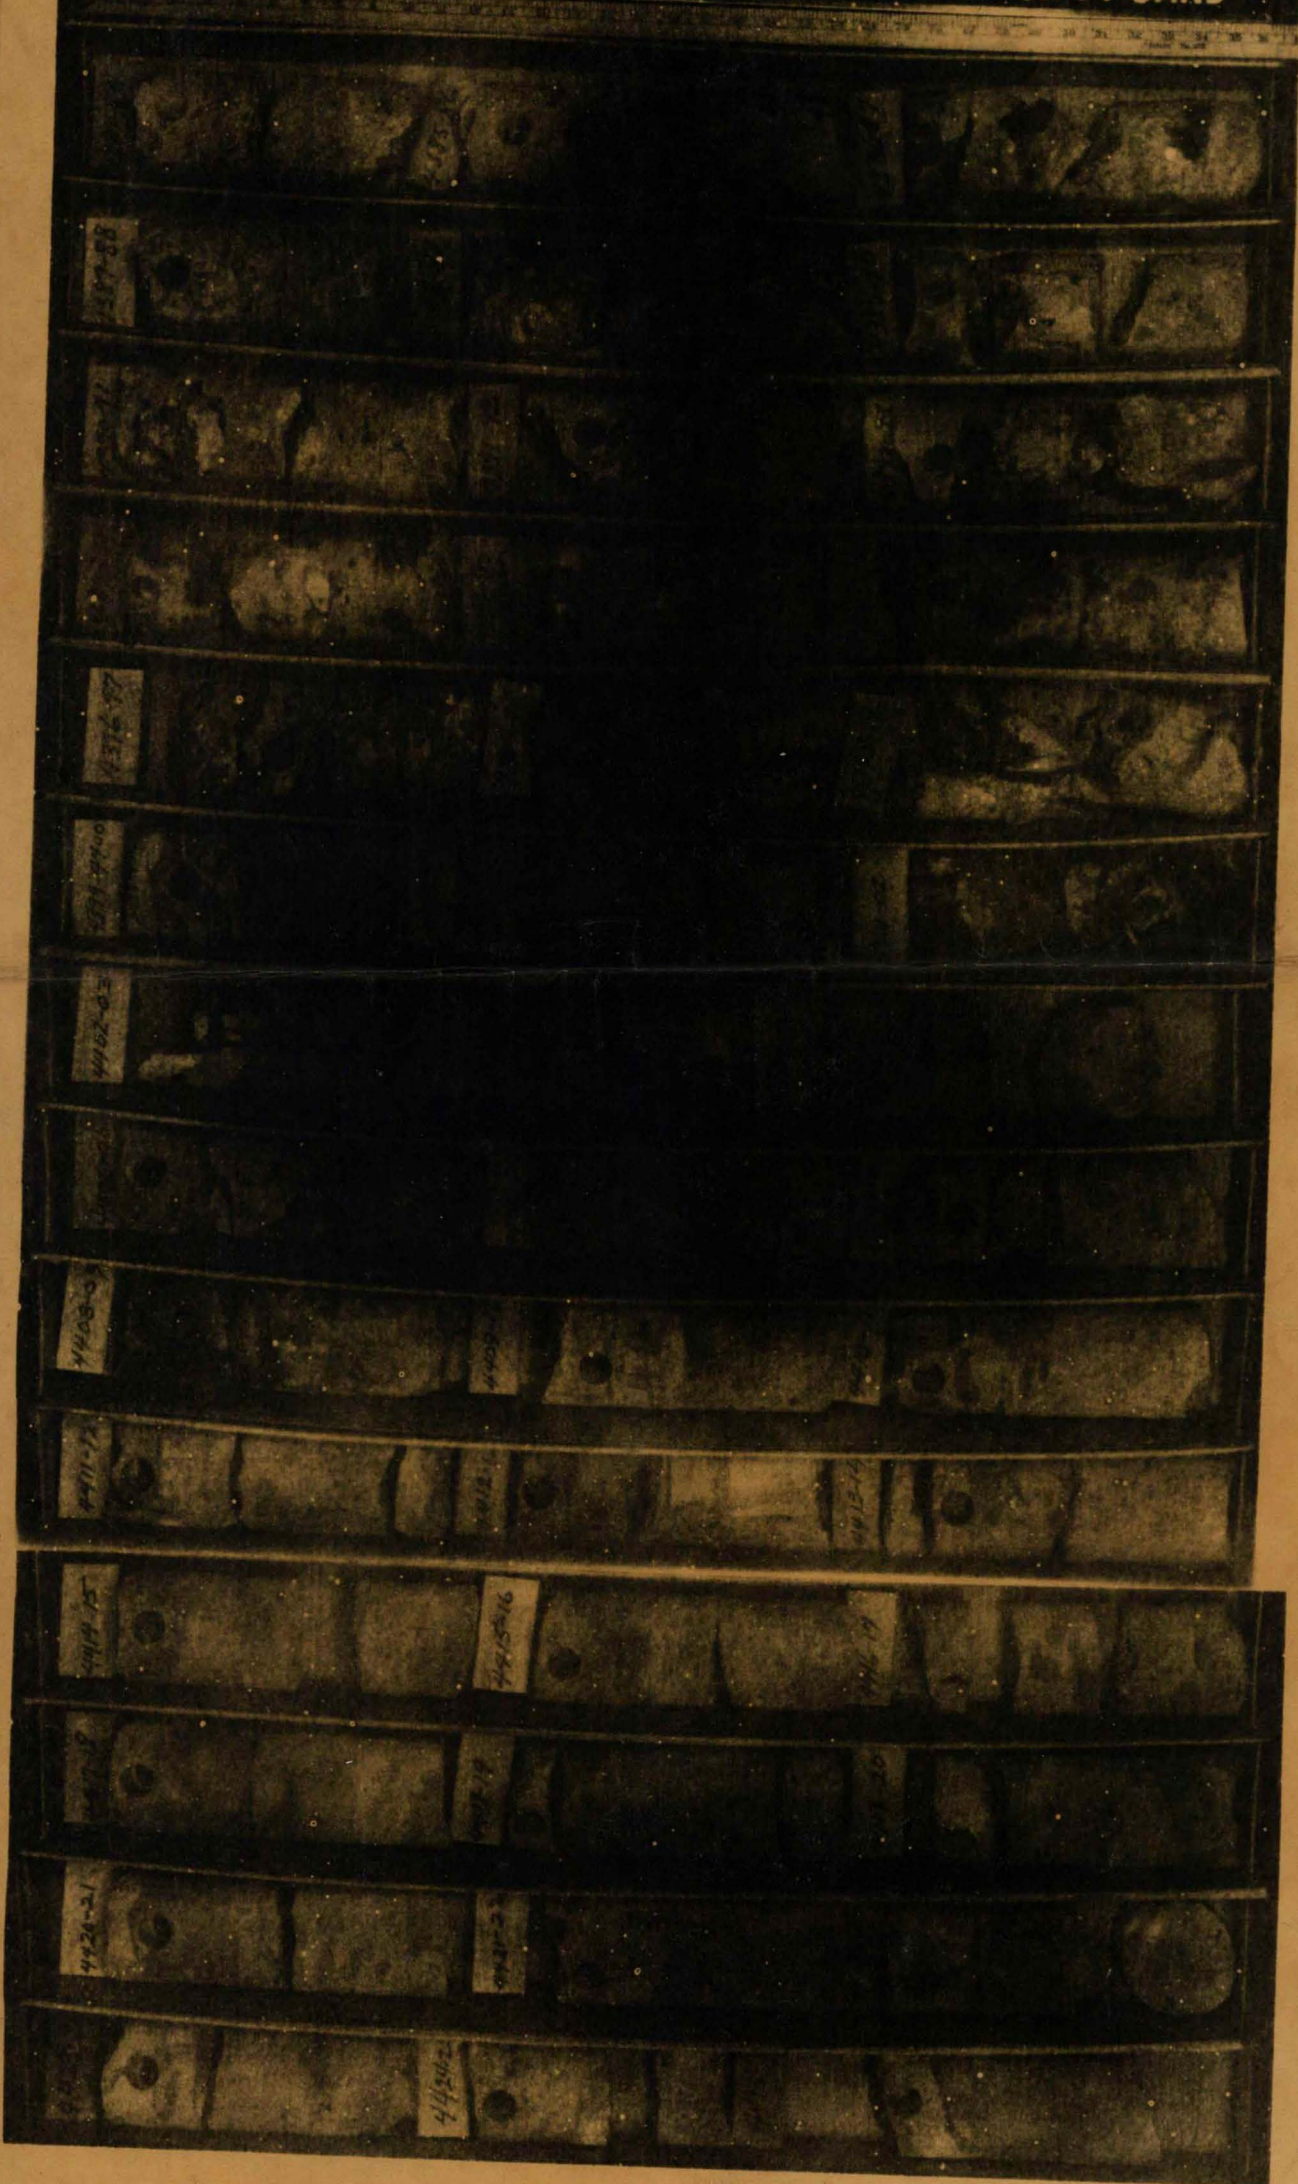

SO & G. BROOKS 1
BARBER CO., KANS.

SEC. 22 32S 13W
MISSISSIPPI SAND

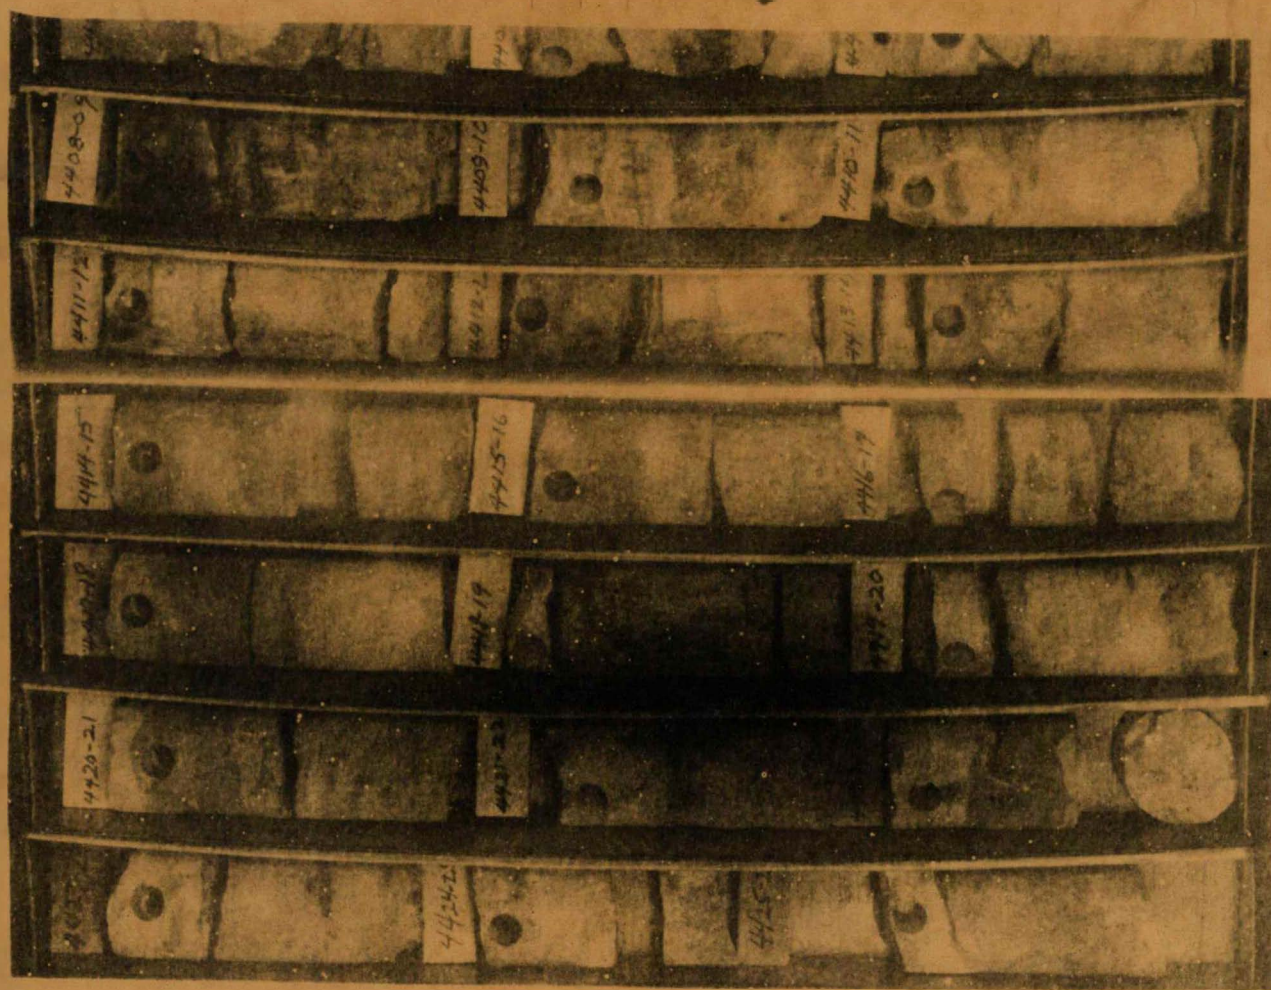

STATE _____ COUNTY OR PARISH _____

MAP _____ POOL _____

SEC. 22 TWP. 32 RGE. 13W

COMPANY Sinclair

WELL NO. 1 FARM Brooks

FT. FR. LINES N _____ E _____ S _____ W _____

ELEVATION 6489 LOCATION NE SE NE

FIRST RPT. LOC _____ RIG _____

COMM DRLG _____ COMP _____

CASING RECORD 2 1/2" tubing @ 4374


PERF RECORD _____

TUBING RECORD _____ GAS SAND _____

OIL SD _____ TO _____ PB _____

IP OIL OR GAS _____

CHOKE _____ TP _____ CP _____ PL _____

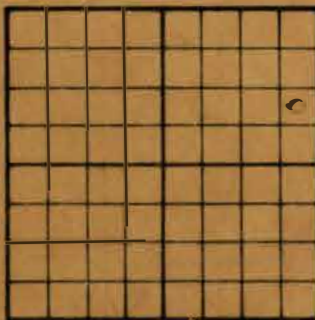

DATE Aug 4205 9' to #1 Bk. - 4380 which
is a miss prod at NE offset

SEP 19 1958 Aug 4334 Miss 4381
(-2733), core 4384-91, recov.
7 ft. shaly, tripolytic chert, 15%
fresh chert, not very porous, tabling
990. in. Preparing to take D.S.T.
Miss is 3' higher than NE offset, and
is favorable for production.

SEP 15 1958 DST 4379-4426 3 hrs, good w/o, recov.
30 ft. 9 cm, FP 20 to 50, BHP 780,
bringing out core from 4391-4426
Core 4391-4426 rec 35'; 13' trip & fresh ch.
(25% fresh ch) med type bleeding oil; 6' sh
por, stain, cherty dol, bleeding oil; 8'
same as above but tight; 8' tight med
X in gray dol, V spotted bleeding oil; taking
DST 4379-4426 SEP 18 1958 DST 4380-4426,
3 hrs, gas to surface 14 in, recov. 780 ft
30 gvw. oil, FP 30 to 305, BHP 1515.
Wells ahead 4445 will drill to 4495
DST 4391-4426 780 oil BHP 1580

SEP 19 1958 Elec. log tops: Heeb 3689, 2009 sh. 3746,
Down 51.3778(-2130), LK 3889(-2240)
Miss 4375(-2727), RTD 4470, 5' TD 4465,
Comm. 4464' of 5 1/2" casing w/ 2003X. WOC.
Miss. Elec. log top is 3' higher than NE
offset, & looks like it will make a producer.

SEP 20 1958 WOC. CO. Lane Wells tops:
Heeb 3693, Rough. sh 3750, Long. sh 3782,
LK 3893(-2245), Miss 4380(-2732),
L.N. T.D. 4430 next page