

15-119-20145

27-32-29W

C NE/4 NE/4
SECTION 27-32S-29W
MEADE COUNTY, KANSAS

15-119-20145

PHILLIPS WELL NO. 1

CONTRACTOR: RINE DRILLING COMPANY

STARTED: MARCH 21, 1974

COMPLETED: APRIL 13, 1974

Operator George R. Shaw

L O G

Subsoil & Rock	0'	-	480'
Shale & Shells	480'	-	720'
Red Bed	720'	-	2455'
Red Rock & Shale	2455'	-	2605'
Shale	2605'	-	2784'
Shale & Shells	2784'	-	2910'
Lime & Shale	2910'	-	4811'
Lime	4811'	-	5666'
Lime & Shale	5666'	-	5762'
Lime	5762'	-	6000'
Lime & Sand	6000'	-	6200'

Totco - 1/2° @ 525'. Ran 16 jts. 13 3/8
csg. @ 496'

Totco - 3/4° @ 4148'; 1° @ 4811'

Totco - 3/4° @ 5666'

Plug w/35 sx. @ 1200'

Plug w/35 sx. @ 500'

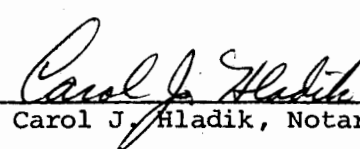
Plug w/10 sx. @ 40'

STATE OF KANSAS)
COUNTY OF SEDGWICK) ss

I, E. J. Rine, do hereby certify that the above is a true and accurate log of the Phillips Well No. 1, located C of NE/4 of NE/4 of Section 27-32S-29W, Meade County, Kansas.


E. J. Rine, President

Subscribed and sworn to before me this 16th day of April, 1974.


Carol J. Hladik, Notary Public

My commission expires: 10/31/75



State Geological Survey
WICHITA, BRANCH