

STATE CORPORATION COMMISSION OF KANSAS
OIL & GAS CONSERVATION DIVISIONWELL COMPLETION OR RECOMPLETION FORM
ACO-1 WELL HISTORY

DESCRIPTION OF WELL AND LEASE

Operator: License # 5050
 Name HUMMON CORPORATION
 Address .. 400 One Main Place
 City/State/Zip Wichita, Ks. 67202

Purchaser.....

Operator Contact Person .. Wilber D. Berg
 Phone 316/263-8521

Contractor: License # 5148
 Name Big-H Drilling, Inc.

Wellsite Geologist... Tim Pierce
 Phone..... 316/263-8521

Designate Type of Completion

☒ New Well ☐ Re-Entry ☐ Workover

☐ Oil ☐ SWD ☐ Temp Abd.
☐ Gas ☐ Inj ☐ Delay Comp.
☒ Dry ☐ Other (Core, Water Supply etc.)

If OWWO: old well info as follows:

Operator
 Well Name
 Comp. Date Old Total Depth

WELL HISTORY

Drilling Method:

☒ Mud Rotary ☐ Air Rotary ☐ Cable

... 4/11/85 .. 4/23/85 .. 4/23/85 ..
 Spud Date Date Reached TD Completion Date
 ... 4763
 Total Depth PBTD

Amount of Surface Pipe Set and Cemented at feet
 Multiple Stage Cementing Collar Used? ☐ Yes ☐ No
 If yes, show depth set..... feet
 If alternate 2 completion, cement circulated
 from..... feet depth to..... w/..... SX cmt

API NO. 15-007-21,085.....

County..... Harper

SE NE SW Sec. 4 Twp. 32S Rge. 7 ☐ East
☒ West

... 1650 ... Ft North from Southeast Corner of Section
 ... 2970 ... Ft West from Southeast Corner of Section

(Note: Locate well in section plat below)

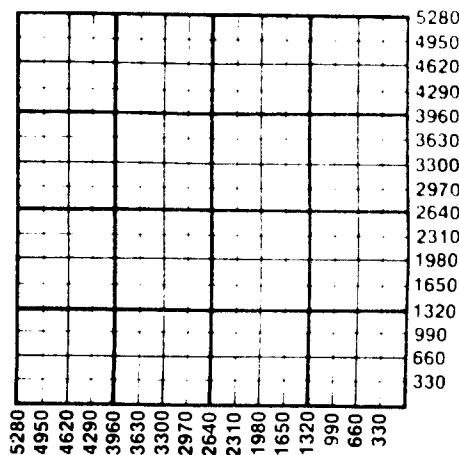
Lease Name..... SHARP Well #..... 1 ✓

Field Name..... MUIR EXT.....

Producing Formation.....

Elevation: Ground..... 1438 KB..... 1451

Section Plat



X WATER SUPPLY INFORMATION

Disposition of Produced Water: ☐ Disposal
 Docket # ☐ Repressuring

Questions on this portion of the ACO-1 call:

Water Resources Board (913) 296-3717

Source of Water:

Division of Water Resources Permit #.....

☐ Groundwater..... Ft North from Southeast Corner
 (Well) Ft West from Southeast Corner of
 Sec Twp Rge ☐ East ☐ West

☐ Surface Water..... Ft North from Southeast Corner
 (Stream, pond etc)..... Ft West from Southeast Corner
 Sec Twp Rge ☐ East ☐ West

☒ Other (explain) J. & M. Water Hauling.....
 (purchased from city, R.W.D. #)

INSTRUCTIONS: This form shall be completed in duplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 90 days after completion or recompletion of any well. Rule 82-3-130 and 82-3-107 apply.

Information on side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3-107 for confidentiality in excess of 12 months.

One copy of all wireline logs and drillers time log shall be attached with this form. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells.

Operator Name HUMMON CORPORATION Lease Name SHARP Well # 1Sec. 4 Twp. 32S Rge. 7 ☐ East ☒ West County HARPER

WELL LOG

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all drill stem tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface during test. Attach extra sheet if more space is needed. Attach copy of log.

Drill Stem Tests Taken ☒ Yes ☐ No
 Samples Sent to Geological Survey ☒ Yes ☐ No
 Cores Taken ☐ Yes ☒ No

Formation Description
☒ Log ☐ Sample

DST #1: 4740-4757

15/30/15/15 SIP 52/31
 1st op: VWB/ died 5 min. FP 31/31 31/31
 2nd op: no blow HP 2397/2344
 Rec 10' DM, w/ BHT 134°

DST #2: 4752-4763

45/60/45/60 SIP 1800/1800
 1st op: WB bldg to SB/ 20min. FP 0/364 239/603
 2nd op: SB decrg to 7 inches HP 2449/2397
 Rec 1240' Mdy SW BHT 145°
 Chlorides 78,000 PPM

DST #3: 4260-4410 (Straddle)

30/30/45/60 SIP 72/187
 1st op: Weak to Very Weak FP 52/52 52/52
 intermediate blow HP 2083/2062
 2nd op: Weak 2 inch blow BHT 117°
 Rec 65' DM

Name	Top	Bottom
Elgin SD	3098	-1647
Heebner SH	3258	-1807
Stalnaker SD	3599	-2148
KC	3830	-2379
Stark SH	3958	-2507
BKC	4042	-2593
Cherokee SH	4234	-2783
Mississippi	4392	-2941
Kinderhook	4632	-3181
Viola	4747	-3296
Simpson SD	4758	-3307
LTD	4763	-3312

MAY 03 1965

CASING RECORD ☐ New ☒ Used

Report all strings set-conductor, surface, Intermediate, production, etc.

Purpose of String	Size Hole Drilled	Size Casing Set (in O.D.)	Weight Lbs/Ft.	Setting Depth	Type of Cement	#Sacks Used	Type and Percent Additives
Surface	12-1/4	8-5/8	23#	224	common	200	2%gel, 3%CC

PERFORATION RECORD

Shots Per Foot Specify Footage of Each Interval Perforated

Acid, Fracture, Shot, Cement Squeeze Record

(Amount and Kind of Material Used)

Depth

TUBING RECORD

Size

Set At

Packer at

Liner Run

☐ Yes ☐ No

Date of First Production

Producing Method

☐ Flowing ☐ Pumping ☐ Gas Lift ☐ Other (explain).....

★
MAY 03 1985

State Geological Survey
WICHITA BRANCH

DRILLERS LOG

#1 Sharp X

CASING RECORD:

8-5/8" @ 224
w/ 200sx cement

COMPANY: Hummon Corporation

CONTRACTOR: Big-H Drilling, Inc.

COMMENCED: April 11, 1985

COMPLETED: April 23, 1985


DESCRIPTION:

SE NE SW
Sec. 4-32s-7W.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>
Sand & Red Bed	0	115	
Red Bed	115	228	
Red Bed & Shale	228	1272	
Shale & Lime	1272	1781	
Lime & Shale	1781	1938	
Shale & Lime	1938	2434	
Lime & Shale	2434	2843	
Shale & Lime	2843	3110	
Lime & Shale	3110	3279	
Shale & Lime	3279	3836	
Lime & Shale	3836	3945	
Shale & Lime	3945	4048	
Lime & Shale	4048	4203	
Shale & Lime	4203	4276	
Lime & Shale	4276	4361	
Shale & Lime	4361	4548	
Lime & Shale	4548	4763	
RTD		4763	


I certify that this is a true and correct copy of the above log to the best of my knowledge.

Big-H Drilling, Inc.


Cindy L. Romig

Subscribed and sworn to before me this 30th day of April, 1985.

SANDRA L. MENDOZA
STATE NOTARY PUBLIC
SEDGWICK COUNTY, KANSAS
MY TERM EXPIRES 3/19/86


Notary Public