

15-33-11W



WELL LOG BUREAU--KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas

Company- BARBARA OIL COMPANY  
Farm- Page Est. "A" No. 12

SEC. 15 T. 33 R. 11W  
NE SW NE

Total Depth. 4592  
Comm. 1-17-53 Comp. 2-25-53  
Shot or Treated.  
Contractor. R. C. Patton Co.  
Issued. 4-18-53

County Barber  
KANSAS

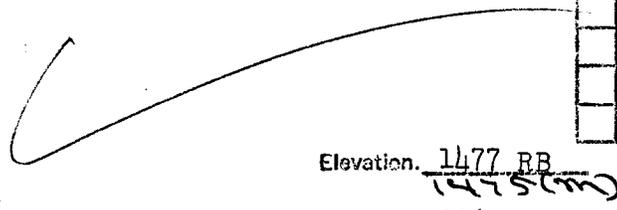

CASING:  
12 1/2" 199' cem w/250 sx  
7 5/8" 4550' cem w/200 sx

Elevation. 1477 RB  
1475 (m)  
Production. 206 BOPD, State Pot.

Figures Indicate Bottom of Formations.

shale red	65
shale red, shells	225
shale red	450
shale red, shells	960
anhydrite, shale	1110
shale	1360
salt, shale, shells	1505
anhydrite, shale	1645
shale, lime	1745
lime	2110
shale, lime	2450
shale, shells	2645
shale, lime	3655
shale	3678
lime	3736
sand, lime	3802
shale, lime	3840
lime	3902
shale, lime	3988
lime	4098
shale, lime	4172
lime	4318
shale, lime	4493
shale	4543
lime cherty	4592
Total Depth	

Tops:

Douglas sand	3730
Lansing- K.C. lime	3798
Miss. Chert	4491
Top "Oil Pay"	4553
Base "Oil Pay"	4590

DST 4496-4543 open 45 min.  
Strong blow throughout. Gas  
at surface in 9 min. (Est.  
100,000 cu. ft.) 92' gassy  
drilling mud. BHP 1405# in  
15 mins.