


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
 508 East Murdock, Wichita, Kansas

Company- **CHAMPLIN OIL & REFINING CO.**
 Farm- **Davis Ranch Ut.#2 No. 1**

SEC. 32 T. 33 R. 14W
 Approx. C NW/4

Total Depth. **4780'**
 Comm. **3-9-59** Comp. **3-28-59**
 Shot or Treated.
 Contractor. **Arner Drlg. Co.**
 Issued. **5-30-59**

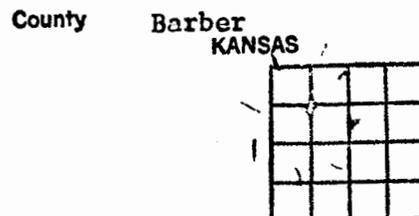

CASING:
 3" @ **200'**
 5" @ **4778.66'**

Elevation. **1748'** **DF**

Production. **7,000,000 CFG**

Figures Indicate Bottom of Formations.

shale & shells	200
red bed & shells	650
shale & shells	1340
shale & lime	1925
shy. lime & shale	2020
lime	2450
lime & shale	2710
shale	2910
shale & lime	3325
lime	3605
shale & lime	4025
lime	4240
shale & lime, sand	4315
lime & shale	4360
lime	4671
lime & shale	4715
lime	4780 RTD
Total Depth	

<u>TOPS:</u>	<u>SAMPLE</u>	<u>ELECTRIC</u>
Heebner	3925	3931
Toronto	3949 ?	3936 ?
Douglas	3963	3961
Lansing K.C.	4135	4125
Base/K.C.	4606	4607
Marnaton	4616	4620 ?
Cherokee	-	4690
Mississippi	4702	4709

DST #1 - 4706-30/120". GTS/7". Rec.
 98' Drlg. mud. ISIP 1830#/30"; FSIP
 1720#/60"; IFP 80#; FFP 60#.

DST #2 - 4730-4765/120" GTS/3". Rec.
 143' Drlg. Mud. ISIP 1830#/30"; FSIP
 1830#/60"; IFP 620#; FFP 640#.