S

SIDE ONE

STATE CORPORATION COMMISSION OF KANSAS
OIL & GAS CONSERVATION DIVISION

WELL COMPLETION OR RECOMPLETION FORM
ACO-1 WELL HISTORY

API NO. 15-025-20927

County Clark

SE NW SE Sec. 3 Twp. 33 Rge. 21 East [X] West

1970 Ft North from Southeast Corner of Section
1970 Ft West from Southeast Corner of Section
(Note: Locate well in section plat below)

Lease Name EDMONSTON Well # #2-3

Field Name Harper Ranch North

Producing Formation N/A

Elevation: Ground 1897' KB 1905'

DESCRIPTION OF WELL AND LEASE

Operator: License # 9657
Name QUINTANA PETROLEUM CORPORATION
Address 1050 - 17th Street, Suite 400*
(*new address as of 11/18/85)
City/State/Zip Denver, Colorado 80265

Purchaser N/A

Operator Contact Person John W. Wessels
Phone (303)628-9211

Contractor: License # 5829
Name Aldebaran Drilling Co., Inc.

Wellsite Geologist Louis S. Bird
Phone (315)227-6041

Designate Type of Completion
[ ] New Well [ ] Re-Entry [ ] Workover

[ ] Oil [ ] SWD [ ] Temp Abd
[ ] Gas [ ] Inj [ ] Delayed Comp.
[XX] Dry [ ] Other (Core, Water Supply etc.)

If OWWO: old well info as follows:
Operator
Well Name
Comp. Date Old Total Depth

Section Plat

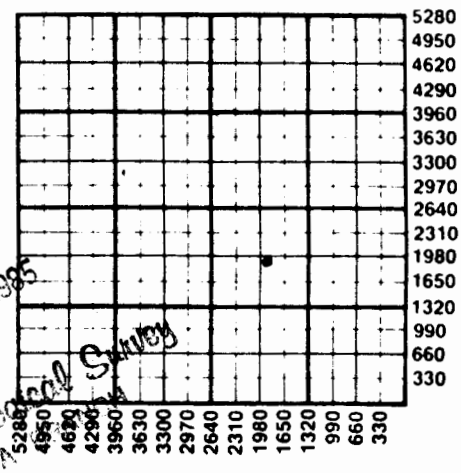

NOV 13 1985
State Geological Survey
WICHITA, KS

WATER SUPPLY INFORMATION
Disposition of Produced Water: [ ] Disposal
Docket # [ ] Repressuring

WELL HISTORY

Drilling Method:
[X] Mud Rotary [ ] Air Rotary [ ] Cable

Spud Date	Date Reached TD	Completion Date
10/17/85	10/26/85	P&A 10/29/85

Total Depth	PBTD
5400'	N/A

Amount of Surface Pipe Set and Cemented at 598 feet
Multiple Stage Cementing Collar Used? [ ] Yes [X] No
If yes, show depth set feet
If alternate 2 completion, cement circulated
from feet depth to w/ SX cmt

Questions on this portion of the ACO-1 call:
Water Resources Board (913) 296-3717

Source of Water:
Division of Water Resources Permit #

[ ] Groundwater Ft North from Southeast Corner
(Well) Ft West from Southeast Corner of
Sec Twp Rge [ ] East [ ] West

[ ] Surface Water Ft North from Southeast Corner
(Stream, pond etc) Ft West from Southeast Corner
Sec Twp Rge [ ] East [ ] West

[X] Other (explain) Purchased water
(purchased from city, R.W.D. #)

INSTRUCTIONS: This form shall be completed in duplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 90 days after completion or recompletion of any well. Rule 82-3-130 and 82-3-107 apply.
Information on side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3-107 for confidentiality in excess of 12 months.
One copy of all wireline logs and drillers time log shall be attached with this form. Submit CP-4 form with

SIDE TWO

Operator Name QUINTANA PETROLEUM CORPORATION Lease Name EDMONSTON Well # #2-3

Sec. 3 Twp. 33S Rge. 21 [ ] East [x] West County Clark

WELL LOG

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all drill stem tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface during test. Attach extra sheet if more space is needed. Attach copy of log.

Drill Stem Tests Taken [x] Yes [ ] No
Samples Sent to Geological Survey [x] Yes [ ] No
Cores Taken [ ] Yes [x] No

DST #1: 5235'-5278' (Upper Morrow)
Times: 30/60/60/120
IHP 2644
IFP 59-47
ISIP 119
FFP 59
FSIP 107
FHP 2633

Recovered 90' drlg mud.
Blow: Weak, died 37 min. into 2nd opening.

DST #2: 5236'-5301' (Lower Morrow)
Times: 30/60/60/120
IHP 2586
IFP plugging - 225
ISIP 1102
FFP 272-296
FSIP 974
FHP 2574

Recovered 60' O&GCM, 120' HO&GCM, 60' M&GCO, 510' Gassy oil
Blow: str, decr. during 2nd opening

Formation Description
[ ] Log [x] Sample

Name	Top	Bottom
Heebner Shale	4240'	
Toronto	4254'	
Lansing	4438'	
Stark Shale	4855'	
Marmaton	4977'	
Pawnee	5071'	
Ft. Scott Ls.	5114'	
Cherokee Shale	5130'	
Base Inola	5242'	
Morrow Sand	5280'	
St. Gen. (Miss)	5327'	
T.D.	5400'	

DST #3: 5239'-5544' (Morrow & Miss.)
Times: 30/60/60/120
IHP 2646
IFP 139-181
ISIP 738
FFP 194-208
FSIP 738 FHP 2589

Recovered 93' mud, 382' muddy, frothy oil

1985 Geological Survey BRANCH

CASING RECORD [x] New [ ] Used
Report all strings set-conductor, surface, intermediate, production, etc.

Purpose of String	Size Hole Drilled	Size Casing Set (in O.D.)	Weight Lbs/Ft.	Setting Depth	Type of Cement	#Sacks Used	Type and Percent Additives
Surface	12¼"	8 5/8"	24#	598'	BJ Lite	450	2% CaCl2

PERFORATION RECORD

Shots Per Foot	Specify Footage of Each Interval Perforated
	N/A

Acid, Fracture, Shot, Cement Squeeze Record

(Amount and Kind of Material Used)	Depth
N/A	

TUBING RECORD Size Set At Packer at
N/A

Liner Run [ ] Yes [ ] No
N/A

Date of First Production: DRY HOLE

Producing Method: [ ] Flowing [ ] Pumping [ ] Gas Lift [ ] Other (explain)

ALDEBARAN DRILLING CO. INC.
453 SOUTH WEBB ROAD
P.O. BOX 18611
WICHITA, KANSAS 67207
(316) 685-5372

WELL LOG

WELL NAME: Edmundston 2-3

WELL LOCATION: C NW SE

Section 3-33S-21W Clark Co., KS

OPERATOR: Quintana Petroleum Corporation

CONTRACTOR: Aldebaran Drilling Co., Inc.

COMMENCED: 10-16-85

COMPLETED: 10-28-85

CASING RECORD: 14 jts 8 5/8" 24 wt new set at 600', 275 sks light 4% cc, 175 sks Common 4% cc 2% gel.

FORMATION:	FROM:	TO:
Sand and Red Bed	0	650'
Red Bed	650'	972'
Red Bed and Shale	972'	2262'
Lime and Shale	2262'	5400'

NOV 04 1985
State Geological Survey
WICHITA BRANCH

STATE OF KANSAS)
COUNTY OF SEDGWICK) SS:

ERTIFY THAT THIS IS A TRUE AND CORRECT COPY OF THE DRILLER'S LOG ON THE WELL DRILLED C NW SE Section 3-33S-21W Clark County, KS TO THE BEST OF MY KNOWLEDGE AND BELIEF.

ALDEBARAN DRILLING CO., INC.
Michael W. Kirkman,
Vice Pres.

SUBSCRIBED AND SWORN TO BEFORE ME THIS 30th DAY OF October, 1985.

APPOINTMENT EXPIRES: June 12, 1989

Lynanne T. Rohlman NOTARY PUBLIC

LYNANNE T. ROHLMAN
NOTARY PUBLIC
STATE OF KANSAS
My Appt. Exp. 6-12-89

RECEIVED
STATE CORPORATION COMMISSION
OCT 31 1985
CONSERVATION DIVISION
Wichita, Kansas