

Clark

DX 78-1


KANSAS

Section 35 Township 33 Range 21W

Well No. #3 Gibson

Company Mid-Continent Petroleum Corp

NORTH

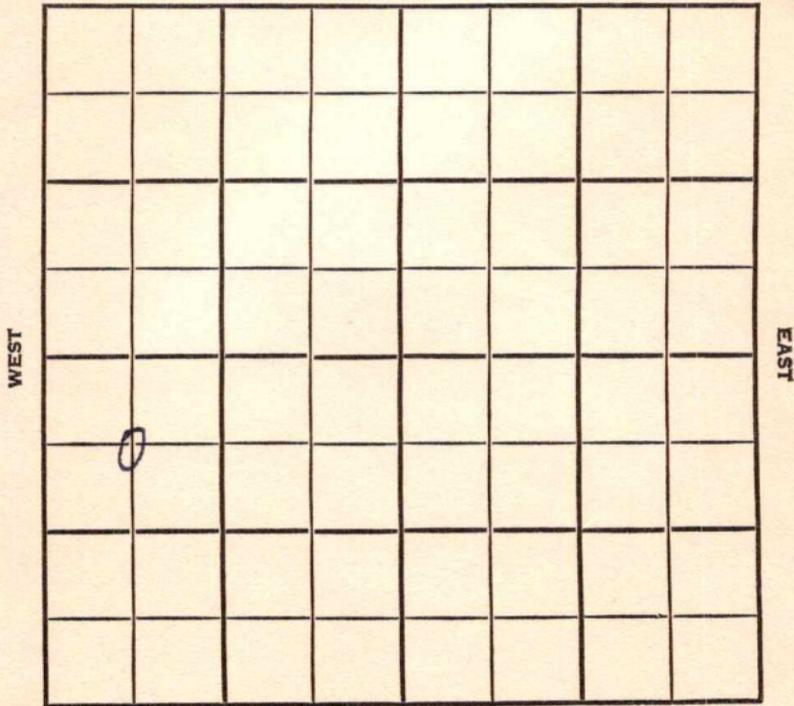

SOUTH

Clark
Summer

KANSAS

HOT FILE


SEC.	TWP.	R.
35	33	21 W

WELL NO. # 3 I. P. Gibson FARM

COMPANY Mid-Continent Petroleum Corp.

CONTRACTOR Helmerich & Payne, Inc.
Harper Ranch Pool

660 Ft. from N. Line
~~1980~~ Ft. from S. Line
 Ft. from E. Line
 660 Ft. from W. Line

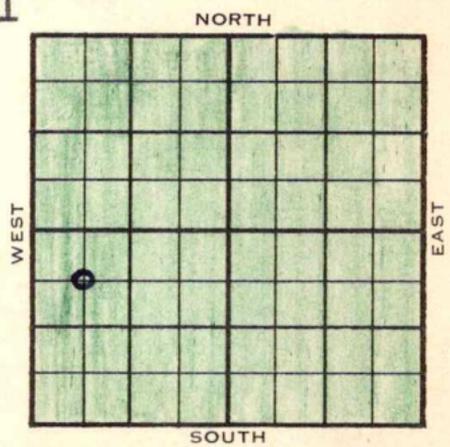

C NW SW

	ELEVATION	REPORT
1954	1954' DF 1944' gr.	
10/26	Location Notice	
10/27	MIT	(DR)
10/27	Location	(F. R. Ticket)
10/28	P&C	(DR)
10/29	MIT. P & C	
11/1	Spud 10-31-54 20" @ 78' w/250 sax. TD 78'	"
11/2	TD 318' WOC	"
11/3	TD 509' Reconditioning hole	"
11/4	TD 509' 13-3/8" @ 505 w/500 sax.	"
11/5	TD 509', WOC	"
11/8	TD 2456' 9-5/8" csg 2456'	"
11/9	TD 2456', WOC	"
11/10	TD 2456', WOC	"
11/11	TD 2895' Drlg.	"
11/12	TD 3234', drilg.	"
11/15	TD 3870' lime & shale	"
11/16	TD 4210' drlg.	"
11/17	TD 4488' Lime	"
11/18	TD 4722' drlg.	"
11/19	TD 4833' Drlg.	"
11/22	TD 5456' Preparing to core.	"

OVER

1954

- 11/23 // TD 5471'
Core #1 5455'-71' 2' good sand
5461'-63'. Coring. (D.R.)
- 11/24 **Lans 4579'**
DST 4847'-53' opn 35 min, rec 12' Mud
1900#
Last report in this office Monday A.M.
they were at 5456', preparing to core.
(Sct. Ltr.)
- 11/26 TD 5563'
5½" @ 5562' w/300 sks.
Top: **Miss 5513'** (D.R.)
- 11/29 TD 5563'
Bailing mud "
- 11/30 TD 5563' drlg. plugs. "
- 12/1 TD 5563' Perf 54 holes 5476-90.
Testing. (DR)
- 12/2 TD 5563' Testing after sandfrac
treatment. (DR)
- 12/2 Core 5456-71, rec 15'.
Core 5471-96, rec 25'
DST 5454-96, open 1 hr rec 770' VSO
& GCM, 1045#
Core 5496-5526', rec 30'.
Miss 5513' TD 5563'. 5½" @ 5562
GO to 5530' 54/5476-5490
B/20 GMPH. SP 5465' 500 M-A
frac. to swab. (Ltr-Gilstrap)
- 12/3 TD 5563' Testing. (DR)
- 12/3 Schl tops: **Lans. 4597'**, **Marmaton 5168'**
Upper Cherokee 5324', **Lower Cherokee**
(Morrow) 5444', **Mississippi 5513'**.
(Geol. Dept.)
- 12/6 TD 5563' COMP. 12-6-54
200 BPD thru 1" choke. (DR)
- 12/9 S/csg down 2500' Started F/by
heads. F/L F/85 BO 4 hrs NW 1"
ck. F/95 BO 7 hrs. TP 40#
CP 450# F/13½ BOPH 1" ck.
TP 50# CP 675# SI tanks full.
(Ltr-Gilstrap)
- 12/16 Completed for a state test of 255
BOPD. (Ltr-Gilstrap)

3 I. P. Gibson

1954
12/15

Spud 10-31-54 Oil well TD 5563
20" @ 78 13-3/8" @ 505
9-5/8" @ 2455 **Lans 4579**
DST 4847-53 open 35 min, rec 12' mud
Core 5456-71 rec 15'
Core 5471-96 rec 25'
DST 5454-96 open 1 hr rec 770' VSO &
GCM, 1045#
Core 5496-5526, rec 30' **Miss 5513**
TD 5563' 5" @ 5562 CO to 5530
54/5476-5490 11 bailers mud 2 hr.
B/20 GMPH SP 5465 500 M-A frac.
F/85 BO 4 hr. F/95 BO 7 hrs.
F/13 $\frac{1}{2}$ BOPH Comp. F/255 BOPD
Schl tops: **Cherokee 5323' Miss 5513**
Marm. 5168'

COMPLETED

SEC.	TWP.	R.
------	------	----

WELL NO. _____

_____ FARM

COMPANY _____


CONTRACTOR _____

_____ Ft. from N. Line


_____ Ft. from S. Line

_____ Ft. from E. Line

_____ Ft. from W. Line

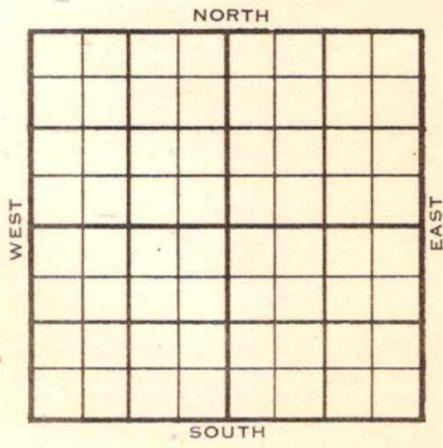

ELEVATION	REPORT
-----------	--------

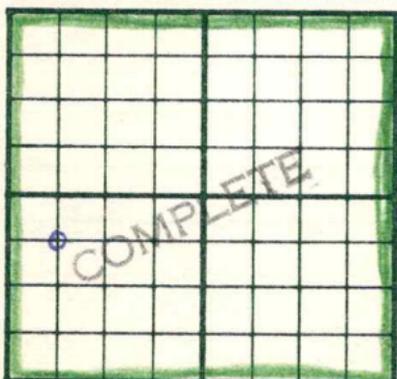County Clark State KansasSec. 35 (Blk.
Twp.) 33 (Sur.
Rge.) 21W Map No.Operator Mid-Continent PetroleumWell No. 3 Farm GibsonElev. 1954 Location C NW SW660 Ft. From N Line SW660 Ft. From W Line Quarter

1st. Report _____

Completion DEC 15 1954Remarks Harper Ranch PoolHelmerich & Payne - ContrSpudding Date 10-31-54Drlg. Data Oil well TD 556320" @ 78 13 3/8" @ 505 9 5/8" @ 2455Lans. 4579 DST 4847-53 open 35 min.Rec. 12' mud Core 5456-71 Rec. 15'Core 5471-96 Rec. 25' DST 5454-96open 1 hr. Rec. 770' vso & gcm 1045#Core 5496-5526 Rec. 30' Miss. 5513TD 5563 5" @ 5562 CO to 553054/ 5476-5490 11 bailers mud 2 hr.B/ 20 gmph SP 5465 500 M-A fracF/ 85 bo 4 hr. F/ 95 bo 7 hr.F/ 13 1/2 boph Comp. F/ 255 bopdSCHLUMBERGER TOPS:Cherokee 5323 Miss. 5513 Marm. 5168

FABEN GILSTRAP

County **Clark** State **Kansas**

Sec. **35** (Blk. Twp.) **33** (Sur. Rge.) **21W** Map No.

Operator **Mid-Continent Petroleum Corp.**

Well No. **3** Farm **Gibson**

Elev. Location **C NW SW**



660 Ft. From **N** Line **SW**

660 Ft. From **W** Line Quarter

Ist. Report **OCT 27 1954**

Completion

Remarks

Helmerich & Payne - Contr.

Spudding Date

Drlg. Data **Harper Ranch Pool**

Location

FABEN GILSTRAP

DRILLING WELL COMPLETION REPORT

DEVELOPMENT WELL

Well No. 3 Farm Name I. P. Gibson

Date completed Dec. 6, 1954

Description Sec. 35-33S-21W

County Clark State Kansas

Initial production 200 ^{1" choke} bbls. Total depth 5563 feet

Initial volume _____ cu. ft. _____ lbs. rock pressure

M.C.P.C. Interest 100%

Remarks: _____

A. E. Pierce

W

- Mr. McDowell ³
- Accounting Dept.
- ✓ Scouting Dept.
- Geological Dept.
- Pipe Line Dept.
- Materials Dept.
- Rental Dept.
- Legal Dept.
- Mr. Leo Meyer
- Income Tax Dept.
- Engineering Dept.
- Lease Inventory
- File


LOCATION NOTICE

TULSA, OKLA., 10-26-54

DEVELOPMENT WELL

WELL NO. 3 ON I. P. Gibson FARM

WILL BE AS FOLLOWS:

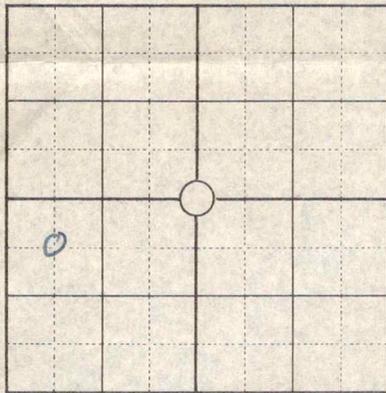

_____ FEET FROM NORTH LINE
 _____ FEET FROM EAST LINE
1980 FEET FROM SOUTH LINE
660 FEET FROM WEST LINE

IN 11

SEC. 35 TWP. 33S RANGE 21W

Clark COUNTY, STATE OF Kansas

REMARKS: R.L. Mankey; R.O. Bobey

M.C.P.C. --- 100%

COPIES TO:

- R. W. McDOWELL
- DISTRICT SUPT.
- ACCOUNTING DEPT.
- SCOUTING DEPT.
- GEOLOGICAL DEPT.
- PIPE LINE DEPT.
- MATERIALS DEPT.
- RENTAL DEPT.
- LEGAL DEPT.
- LEO MEYER
- INCOME TAX DEPT.
- ENGINEERING DEPT.
- LEASE INVENTORY
- CLAIM DEPT.
- J. W. BASORE
- FILE

SIGNED A. F. Pierce

Card Typed - m m

mapped (drlg)

CNWSW