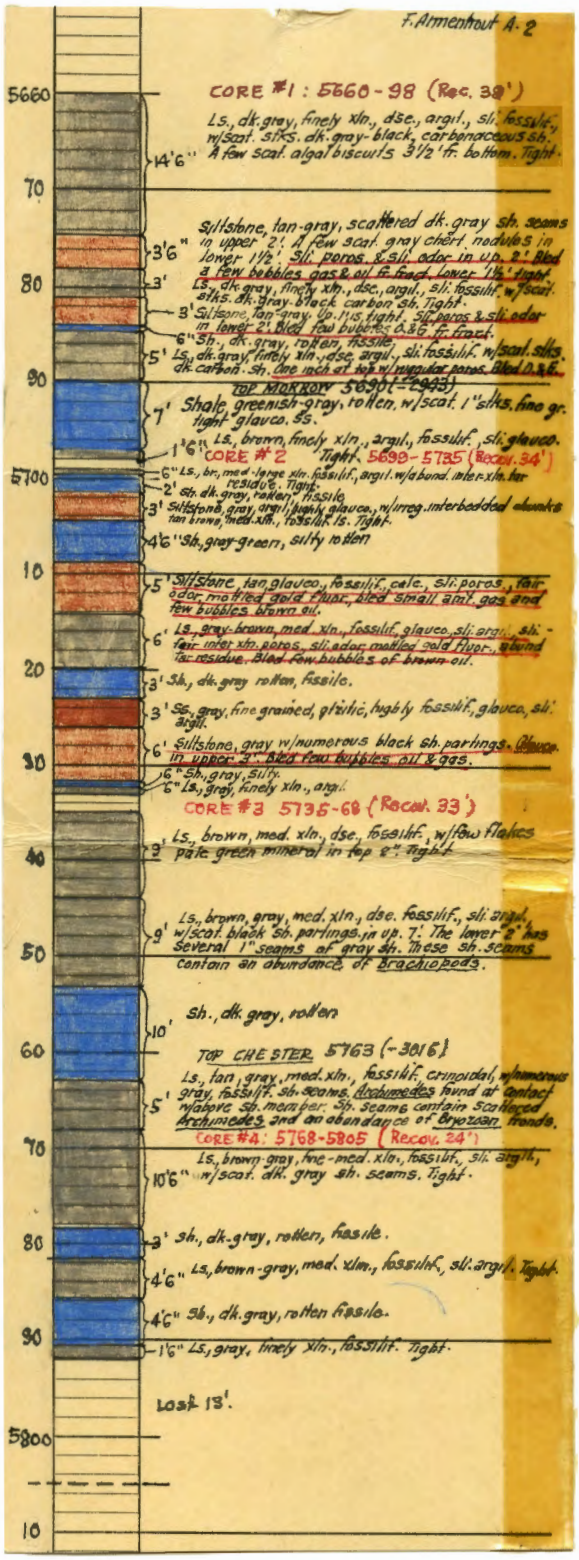

F. Ammenhout A-2
5660
CORE #1 : 5660-98 (Rec. 38')
Ls., dk. gray, finely xln., dse., argil., sli. fossilif., w/scat. stks. dk. gray-black, carbonaceous sh.
14'6" A few scat. algal biscuits 3½' fr. bottom. Tight.
70
Siltstone, tan-gray, scattered dk. gray sh. seams in upper 2'. A few scat. gray chert nodules in lower 1½'. Sli. poros. & sli. odor in up. 2'. Bled a few bubbles gas & oil fr. frac. Lower 1½' tight.
3'6"
3'
80
Ls. dk. gray, finely xln., dse., argil., sli. fossilif. w/scat. stks. dk. gray-black carbon sh. Tight.
3' Siltstone, tan-gray, up. 1½ tight. Sli. poros & sli. odor in lower 2'. Bled few bubbles oil fr. frac.
6" Sh., dk. gray, rotten, fissile.
5' Ls., dk. gray, finely xln., dse. argil., sli. fossilif. w/scat. stks. dk. carbon. sh. One inch at top w/irregular poros. Bled O & G.
90
TOP MAKROW 5690 (-2945)
7' Shale, greenish-gray, rotten, w/scat. 1" stks. fine gr. tight glauco. ss.
1'6" Ls., brown, finely xln., argil., fossilif., sli. glauco.
CORE #2 Tight. 5698-5735 (Recov. 34')
5700
6" Ls., br., med.-large xln. fossilif., argil. w/abund. inter-xln. bar residue. Tight.
2' Sh. dk. gray, rotten, fissile.
3' Siltstone, gray, argil., highly glauco., w/irreg. interbedded chunks tan brown, med. xln., fossilif. ls. Tight.
4'6" Sh. grey-green, silty rotten
10
5' Siltstone, tan glauco., fossilif., calc., sli. poros, fair odor, mottled gold fluor., bled small amt. gas and few bubbles brown oil.
6' Ls., gray-brown, med. xln., fossilif., glauco., sli. argil., sli. - fair inter xln. poros., sli. odor, mottled gold fluor., gluund tar residue. Bled few bubbles of brown oil.
20
3' Sh., dk. gray rotten, fissile.
3' Ss., gray, fine grained, glauc, highly fossilif., glauco, sli. argil.
6' Siltstone, gray w/numerous black sh. partings. Glauco. in upper 2". Bled few bubbles oil & gas.
30
6" Sh., gray, silty.
6" Ls., gray, finely xln., argil.
CORE #3 5735-68 (Recov. 33')
40
2' Ls., brown, med. xln., dse., fossilif., w/few flakes pale green mineral in top 8". Tight.
9' Ls., brown, gray, med. xln., dse. fossilif., sli. argil. w/scat. black sh. partings. in up. 7'. The lower 2' has several 1" seams of gray sh. These sh. seams contain an abundance of brachiopods.
50
10' Sh., dk. gray, rotten
60
TOP CHESTER 5763 (-3016)
5' Ls., tan, gray, med. xln., fossilif. crinoidal, w/numerous gray, fossilif. sh. seams. Archimedes found at contact w/above sh. member. Sh. seams contain scattered Archimedes and an abundance of Bryozoan fronds.
CORE #4: 5768-5805 (Recov. 24')
70
10'6" Ls., brown-gray, fine-med. xln., fossilif., sli. argil., w/scat. dk. gray sh. seams. Tight.
80
3' Sh., dk.-gray, rotten, fissile.
4'6" Ls., brown-gray, med. xln., fossilif., sli. argil. Tight.
4'6" Sh., dk. gray, rotten fissile.
90
1'6" Ls., gray, finely xln., fossilif. Tight.
Lost 13'.
5800
10