

Wichita, Kansas

GABBERT-JONES, INC.

MUN 26 1970 KAN

WICHITA, KANSAS  
DRILLERS' WELL LOG

25-34-12W  
CORPORATION DIVISION  
JUN 20 1970  
WICHITA, KANSAS

HICOLE #1-25  
C SW Section 25-34S-12W  
Barber County, Kansas

Commenced: April 27, 1970  
Completed: May 13, 1970

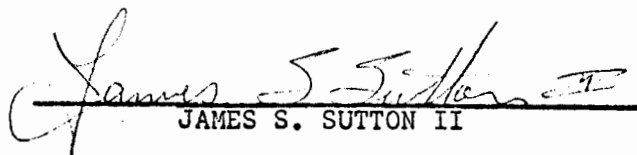
P-4PT 12,927,000 CFGPD & 75 BFPD 50% Oil/A

MISS

OPERATOR - Nichols Drilling Co. (initial & name of operator)

DEPTH		FORMATION	REMARKS
From	To		
0	1000	Red bed	Ran 25 joints 8-5/8" casing, set @ 788', cement basket @ 530', centralizer @ 500', cemented w/100 sacks cement and 400 sacks Howco Lite.
1000	1120	Shale	
1120	1637	Shale and lime streaks	
1637	1686	Anhydrite	
1686	3325	Lime and shale	
3325	3372	Lime	
3372	3570	Lime and shale	
3570	3760	Lime, shale and sand	
3760	4280	Shale and lime	
4280	4405	Lime	
4405	4455	Cherty lime	
4455	4733	Lime	
4733	TD		Ran 149 joints 5-1/2" casing, set @ 4732', 1 ft. off bottom, w/150 sacks cement.

I, JAMES S. SUTTON II, certify this is a correct copy of the Drillers' Log for the well drilled in the C SW Section 25-34S-12W, Barber County, Kansas, to the best of my knowledge and belief.


  
JAMES S. SUTTON II

STATE OF KANSAS )  
                                  ) SS  
COUNTY OF SEDGWICK )

Before me, the undersigned, a Notary Public within and for said County and State, on this 18 day of May, 1970, personally appeared James S. Sutton II to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.

My Commission Expires Feb. 1, 1972.

  
Barbara J. Layton, Notary Public

