

TYPE



AFFIDAVIT OF COMPLETION FORM

ACO-1 WELL HISTORY

35-34-12W

SIDE ONE

Two (2) copies of this form shall be filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within thirty (30) days after the completion of a well, regardless of how the well was completed.

Attach separate letter of request if the information is to be held confidential. If confidential, only file one copy. Information on Side One will be of public record and Side Two will then be held confidential.

Applications must be made on dual completion, commingling, salt water disposal, injection and temporarily abandoned wells.

Attach one copy only wireline logs (i.e. electrical log, sonic log, gamma ray neutron log, etc.). (Rules 82-2-105 & 82-2-125) KCC# (316) 263-3238.

LICENSE # 5041 EXPIRATION DATE 6-30-83

OPERATOR Ram Petroleum Corporation API NO. 15-007-21,339

ADDRESS 1260 KSB&T Bldg. COUNTY Barber

Wichita, Kansas 67202 FIELD Stranathan

\*\* CONTACT PERSON Robt K. Edmiston PROD. FORMATION Mississippi
PHONE (316) 265-5241

PURCHASER (oil) Koch (gas) KS Gas Supply LEASE Morton "A"

ADDRESS P.O. Box 2256 Box 300 WELL NO. #5

Wichita, KS 67201 Tulsa, OK 74102 WELL LOCATION 130' W SW SE SW

DRILLING Union Drilling Co. 330 Ft. from South Line and

CONTRACTOR 1120 Ft. from East Line of

ADDRESS 422 Union Center Bldg. the SW (Qtr.) SEC 35 TWP 34 RGE 12W.
Wichita, Kansas 67202

PLUGGING CONTRACTOR WELL PLAT (Office Use Only)

ADDRESS KCC
KGS

TOTAL DEPTH 4825 PBD 4824 SWD/REP

SPUD DATE 12-8-81 DATE COMPLETED 1-14-82 PLG.

ELEV: GR 1393 DF KB 1398

DRILLED WITH (CABLE) (ROTARY) (AIR) TOOLS.

DOCKET NO. OF DISPOSAL OR REPRESSURING WELL BEING USED TO DISPOSE OF WATER FROM THIS LEASE

Amount of surface pipe set and cemented 327 DV Tool Used? no



THIS AFFIDAVIT APPLIES TO: (Circle ONE) - Oil, Gas, Shut-in Gas, Dry, Disposal, Injection, Temporarily Abandoned, OWWO. Other

ALL REQUIREMENTS OF THE STATUTES, RULES AND REGULATIONS PROMULGATED TO REGULATE THE OIL AND GAS INDUSTRY HAVE BEEN FULLY COMPLIED WITH.

A F F I D A V I T

Robt K. Edmiston, being of lawful age, hereby certifies that:

I am the Affiant, and I am familiar with the contents of the foregoing Affidavit. The statements and allegations contained therein are true and correct.

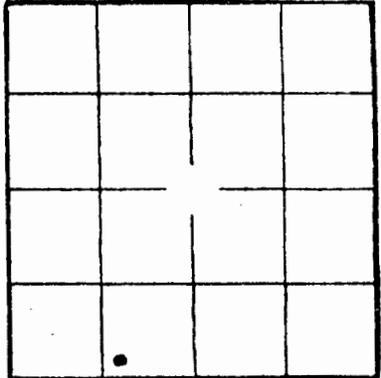

(Office Use Only)
KCC
KGS
SWD/REP
PLG.

FILL IN WELL LOG AS REQUIRED:

WAI HE 25

FORMATION DESCRIPTION, CONTENTS, ETC.	TOP	BOTTOM	NAME	DEPTH
Redbed	0	335	Kansas City	4328
Redbed & Shale	335	648	Base Ks. City	4569
Shale	648	4052	Cherokee	4705
Shale & Lime	4052	4515	Cherokee Sd.	4736
Lime	4515	4825	Mississippi	4751
RTD		4825	LTD	4819

SHOW GEOLOGICAL MARKERS LOGS RUN, OR OTHER DESCRIPTIVE INFORMATION.

Drill Stem Test #1 4760-4785 (Mississippi)  
 30-30-120-90. Rec. 1,020 gas in pipe. 60' very slightly oil specked mud, 60' very slightly oil cut mud, 60' oil cut mud.  
 ISIP 228#, FP 82-91#, 91-100#, FSIP 705#

ACID, FRACTURE, SHOT, CEMENT SQUEEZE RECORD

Amount and kind of material used		Depth interval treated
Acid: 300 gal., 15% Demud		4750-4760
Frac: 30,000# 20/40 sd., 10,000# 10/20 sd.		4750-4760
Date of first production	Producing method (flowing, pumping, gas lift, etc.)	Gravity
1/14/82	Pumping	
RATE OF PRODUCTION 24 HOURS	Oil 5 bbls.	Gas 59 MCF
	Water 75 %	Gas-oil ratio 15 bbls. 11838 CFPB
Disposition of gas (vented, used on lease or sold)		Perforations
Sold		

\* NOTE: Edmiston Oil Company, Inc., operates this well from the casing point.

Report of all strings set — surface, intermediate, production, etc. CASING RECORD (New) or (Used)

Purpose of string	Size hole drilled	Size casing set (in O.D.)	Weight lbs/ft.	Setting depth	Type cement	Sacks	Type and percent additives
Surface	12-1/4	8-5/8		327	Common	300	2% gel, 3% cc
Production		4-1/2		4824	50/50 posmix	225	salt saturated

LINER RECORD

PERFORATION RECORD

Top, ft.	Bottom, ft.	Sacks cement	Shots per ft.	Size & type	Depth interval
			3		4750-4760

TUBING RECORD

Size	Setting depth	Packer set at

35-34-12W

INC

CONTRACTOR'S WELL LOG

OPERATOR: Ram Petroleum Corporation  
 CONTRACTOR: Union Drilling Co., Inc.  
 LEASE NAME: Morton #5  
 LOCATION: SW SE SW Section 35-34S-12W  
 Barber County, Kansas  
 COMMENCED: December 08, 1981  
 COMPLETED: December 16, 1981

---

0	335	Redbed
335	648	Redbed & shale
648	4052	Shale
4052	4515	Shale & lime
4515	4825	Lime
4825		TD

---

We certify that the above foregoing is a true and correct copy of the log on the Morton #5, SW SE SW Section 35-34S-12W, Barber County, Kansas.

Union Drilling Co., Inc.

**DEC 29 1987**  
**KANSAS GEOLOGICAL SURVEY**  
**WICHITA BRANCH**

*R. D. Messinger*  
 R. D. Messinger

STATE OF KANSAS     )  
                                   ) SS  
 COUNTY OF SEDGWICK )

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid County and State as of this 22nd day of December, 1981.

My appointment expires:  
12-24-84

*Shirley A. Gallegos*  
 Shirley A. Gallegos-Notary Public

