

BOMIN TESTING, INC.


BOX 782

LIBERAL, KANSAS 67901


FORMATION TESTING REPORT

Adams	1	1	Horizon Oil & Gas Co.	Spearman, Texas
Lease Name	Well No.	Test No.	Lease Owner	Owners District
LOCATION Sec-30-34s-30w	FIELD	COUNTY	Made	

4190-4210'

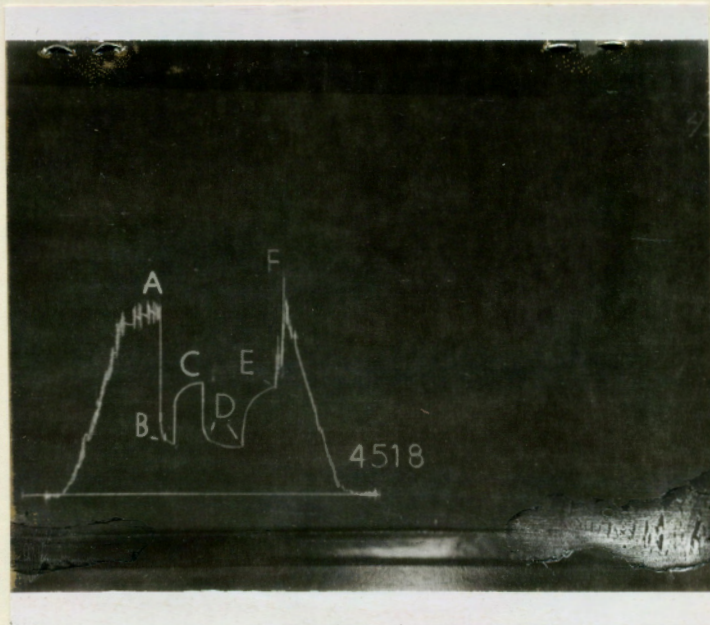

FORMATION
TESTING
REPORT

First Flow	15	Minutes	 BOMIN TESTING BOX 782 LIBERAL, KANSAS	Date	5-23-1969	LOCATION Sec-30-34s-30w
First CIP	30	Minutes		Ticket No.	4518	
Second Flow	45	Minutes		DISTRICT	Liberal, Kansas	
Second CIP	30	Minutes		Kind of Job	Open Hole Test	
Depth Top Gauge	4200	Ft.	Blanked Off	No	CONTRACTOR	Sage Drilling Co.
Recorder No.	2896		12	Hr. Clock	HOLE & TOOL DATA	
Pressure Readings	Field		Office Corrected		Elevation	Top Packer Depth
Initial Hydro Mud Pressure	A-2170		2185		Total Depth	4210'
First Flow	B-621-580		617-584		Casing or Hole Size	7 7/8"
First CIP	C-1330		1339		Liner or Rathole Size	Size Bottom Choke
Second Flow	D-653-580		653-586		Interval Tested	4190-4210'
Second CIP	E-1278		1266		Formation Tested	Lansing Lime Stone
Final Hydro Mud Pressure	F-2160		2155		Est. Gauge Depth Temp.	110
Depth Bottom Gauge	4210	Ft.	Blanked Off	Yes	MUD DATA Weight	9.9
Recorder No.	86		4	Hr. Clock	All depths measured from	K.B.
Pressure Readings	Field		Office Corrected		REMARKS:	15 min. pre-flow with gas to
Initial Hydro Mud Pressure					surface in 1 min. with reading:	
First Flow					3 min.-3500 MCF 15 min.-3500 MCF	
First CIP					Open tool after ICIP with gas readings:	
Second Flow					3 min.-3500 MCF	25 min.-3100 MCF
Second CIP					5 min.-3800 MCF	Spray of mud
Final Hydro Mud Pressure					10 min.-3800 MCF	30 min.-3200 MCF
					20 min.-3800 MCF	Spray of distillate
					40 min.-3400 MCF	45 min.-3400 MCF
					Spray of distillate	Spray of distillate
Recovered	240		Feet of	Distillate Sl. mud cut		
Recovered	60		Feet of	Water		
Recovered			Feet of			
Recovered			Feet of	Chloride-180,000 P.P.M.		
Witnessed By	W.R. Atkinson					
Amount-Type of Cushion	Tester Frank Brown					

Adams
Lease Name


1
Well No.

1
Test No.

Horizon Oil & Gas Co.
Lease Owner

Spearman, Texas
Owners District

4190-4210'



BOMIN TESTING, INC.

BOX 782

LIBERAL, KANSAS 67901

FORMATION TESTING REPORT

Lease Name		Well No.		Test No.		Lease Owner		Owners District	
Adam		1		2		Horizon Oil & Gas Co.		Spearman, Texas	
LOCATION	Sec-30-34s-30w	FIELD		COUNTY	Meade	STATE	Kansas		

4308-4356-4380'

