

10-35-2W

STATE CORPORATION COMMISSION OF KANSAS
OIL & GAS CONSERVATION DIVISION
WELL COMPLETION OR RECOMPLETION FORM
ACO-1 WELL HISTORY
DESCRIPTION OF WELL AND LEASE

Operator: License # 4009
Name Forney Oil Corporation
Address 616 Citizens Plaza
1601 N. W. Expressway
City/State/Zip Oklahoma City, OK 73118

Purchaser N/A (Shut-in)

Operator Contact Person Craig Copeland
Phone (405) 848-0073

Contractor: License # 5420
Name White & Ellis Drilling, Inc.

Wellsite Geologist David Clothier
Phone (316) 269-2003

Designate Type of Completion

☐ New Well ☒ Re-Entry ☐ Workover

☒ Oil ☐ SWD ☐ Temp Abd
☒ Gas ☐ Inj ☒ Delayed Comp.
☐ Dry ☐ Other (Core, Water Supply etc.)

If OWWO: old well info as follows:

Operator Euwer Petroleum Company
Well Name Meils #1
Comp. Date 9/19/83 Old Total Depth 4,751

WELL HISTORY

Drilling Method:

☒ Mud Rotary ☐ Air Rotary ☐ Cable

12/16/85 12/17/85 3/14/86
.....
Spud Date Date Reached TD Completion Date
4747' 4585'
.....
Total Depth PBTD

Amount of Surface Pipe Set and Cemented at 291 feet
Multiple Stage Cementing Collar Used? ☐ Yes ☒ No
If yes, show depth set.....feet
If alternate 2 completion, cement circulated
from.....feet depth to.....w/.....SX cmt
Cement Company Name
Invoice #

API NO. 15-191-21,598A

County Sumner

NE NW SW Sec 10 Twp 35S Rge 2 East
..... ☒ West

2,310 Ft North from Southeast Corner of Section
4,290 Ft West from Southeast Corner of Section
(Note: Locate well in section plat below)


Lease Name Meils Well # 1-10

Field Name

Producing Formation

Elevation: Ground 1121 KB

Section Plat

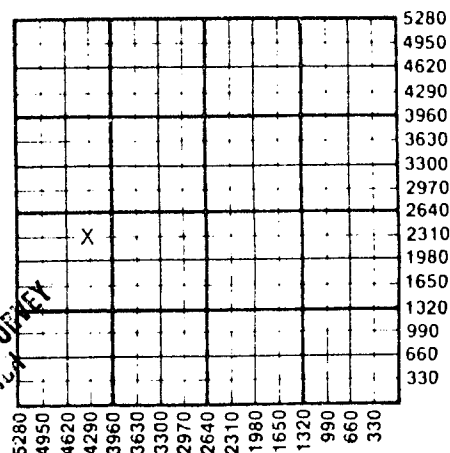

KANSAS GEOLOGICAL SURVEY
WICHITA BRANCH
JUN 11 1986

WATER SUPPLY INFORMATION

Disposition of Produced Water: ☐ Disposal
Docket # ☐ Repressuring

Questions on this portion of the ACO-1 call:

Water Resources Board (913) 296-3717

Source of Water:
Division of Water Resources Permit #

Groundwater.....Ft North from Southeast Corner
(Well)Ft West from Southeast Corner of
Sec Twp Rge East West

Surface Water.....Ft North from Southeast Corner
(Stream, pond etc).....Ft West from Southeast Corner
Sec Twp Rge East West

Other (explain).....
(purchased from city, R.W.D. #)

INSTRUCTIONS: This form shall be completed in duplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 90 days after completion or recompletion of any well. Rule 82-3-130 and 82-3-107 apply.

Information on side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3-107 for confidentiality in excess of 12 months.

One copy of all wireline logs and drillers time log shall be attached with this form. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells.

SIDE TWO

Operator Name Forney Oil Corporation Lease Name Meils Well # 1-10Sec. 10 Twp. 35S Rge. 2 ☐ East ☒ West County Sumner

WELL LOG

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all drill stem tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface during test. Attach extra sheet if more space is needed. Attach copy of log.

Drill Stem Tests Taken ☐ Yes ☒ No
 Samples Sent to Geological Survey ☐ Yes ☒ No
 Cores Taken ☐ Yes ☒ No

Formation Description

☒ Log ☐ Sample

Name Top Bottom
 Mississippi 4306' 4716'

* Set by previous operator.

CASING RECORD ☒ New ☐ Used

Report all strings set-conductor, surface, intermediate, production, etc.

Purpose of String	Size Hole Drilled	Size Casing Set (in O.D.)	Weight Lbs/Ft.	Setting Depth	Type of Cement	#Sacks Used	Type and Percent Additives
Surface *	12 1/4"	8 5/8"		291'		200	
Production	7-7/8"	4 1/2"	10.5#	4,742'	Class A	150	7 1/2# gilsonite/ sack


PERFORATION RECORD

Shots Per Foot	Specify Footage of Each Interval Perforated	Acid, Fracture, Shot, Cement Squeeze Record (Amount and Kind of Material Used)	Depth
2	4621-28'	1500 gal...15% MCA acid	
1	4610-13..4595-4602	1500 gal...15% MCA acid	
1	4524-28..4504-12..4454-96	4100 gal...15% MCA acid	
1	4414-25'	4100 gal...15% MCA acid	

TUBING RECORD Size Set At Packer at
 No tubing presently in hole. 4483'

Liner Run ☐ Yes ☒ No

Date of First Production 2/13 Producing Method ☐ Flowing ☐ Pumping ☐ Gas Lift ☒ Other (explain) Swab test



✓ Ind 10-35-2W

WHITE

AND ELLIS DRILLING, Inc.

DRILLERS LOG

OPERATOR: Forney Oil Corp.
5599 San Felipe
Suite 1200
Houston, TX 77056
CONTRACTOR: White & Ellis Drilling, Inc., 401 E. Douglas, Suite 500,
Wichita, Ks. 67202

Lease Name _____ Meils _____ Well No. 1-10
Sec. 10 T. 35S R. 2W Spot NE NW SW
County Sumner State Kansas Elevation _____

Casing Record:

Surface: 8 5/8" @ 291' with 200 sx. (9-10-83)

Production: 4 1/2" @ 4737' with 150 sx.

Type Well: Oil Well Total Depth 4747'

Drilling Commenced 12-16-85 Drilling Completed 12-18-85

Formation	From	To	Tops
Cellar	0	7	
ement plugs, Open hole	7	4747	

JAN 06 1986

RECEIVED
STATE CORPORATION COMMISSION

JAN 6 1986

CONSERVATION DIVISION