

14-35-29W

AMENDED

SIDE ONE

STATE CORPORATION COMMISSION OF KANSAS  
OIL & GAS CONSERVATION DIVISION  
WELL COMPLETION FORM  
ACO-1 WELL HISTORY  
DESCRIPTION OF WELL AND LEASE

API NO. 15- 119-20,832

County Meade

NW SE NW Sec. 14 Twp. 35S Rge. 29 XX East West  
1575 Ft. North from Southeast Corner of Section

Co. 2440 Ft. West from Southeast Corner of Section  
(NOTE: Locate well in section plat below.)

Lease Name Adams Ranch Well # D-15

Field Name Cimarron Bend

Producing Formation Kansas City

Elevation: Ground 2310' KB 2320'

Total Depth 5230' KB PBTB 5172.89'

Operator: License # 9534

Name: Giant Exploration & Production

Address P.O. Box 2810

City/State/Zip Farmington, N.M. 87499

Purchaser: N/A

Operator Contact Person: Aldrich L. Kuchera

Phone ( 505 ) 326-3325

Contractor: Name: Sage Drilling Company

License: Unknown

Wellsite Geologist: Chip Harraden

Designate Type of Completion

New Well  Re-Entry  Workover

Oil ?  SWD  Temp. Al

Gas  Inj  Delayed Comp.

Dry  Other (Core, Water Supply, etc.)

If **OWNO**: old well info as follows:

Operator: \_\_\_\_\_

Well Name: \_\_\_\_\_


Comp. Date \_\_\_\_\_ Old Total Depth \_\_\_\_\_

Drilling Method:

Mud Rotary  Air Rotary  Cable

5-6-91 5-17-91 6-26-91

Spud Date Date Reached TD Completion Date

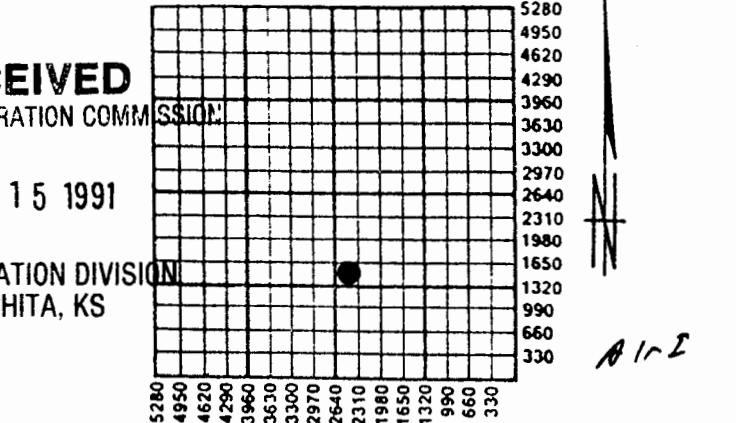

Amount of Surface Pipe Set and Cemented at 1489.49' KB Feet

Multiple Stage Cementing Collar Used?  Yes  No

If yes, show depth set \_\_\_\_\_ Feet

If Alternate II completion, cement circulated from \_\_\_\_\_

feet depth to \_\_\_\_\_ w/ \_\_\_\_\_ sx cmt.

**INSTRUCTIONS:** This form shall be completed in triplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 120 days of the spud date of any well. Rule 82-3-130, 82-3-107 and 82-3-106 apply. Information on side two of this form will be held confidential for a period of 12 months if requested in writing and submitted with the form. See rule 82-3-107 for confidentiality in excess of 12 months. One copy of all wireline logs and drillers time log shall be attached with this form. ALL CEMENTING TICKETS MUST BE ATTACHED. Submit CP-4 form with all plugged wells. Submit CP-111 form with all temporarily abandoned wells. Any recompletion, workover or conversion of a well requires filing of ACO-2 within 120 days from commencement date of such work.

All requirements of the statutes, rules and regulations promulgated to regulate the oil and gas industry have been fully complied with and the statements herein are complete and correct to the best of my knowledge.

Signature Jeffrey R. Vaughan  
Title Vice President, Operations & Engineering Date 11-13-91

Subscribed and sworn to before me this 13th day of November, 91.

Notary Public Debra A. Seltzer

Date Commission Expires July 24, 1995

**K.C.C. OFFICE USE ONLY**

F  Letter of Confidentiality Attached  
 C  Wireline Log Received  
 C  Drillers Timelog Received

**Distribution**

KCC  SWD/Rep  NGPA  
 KGS  Plug  Other IS  
 (Specify)

SIDE TWO

Operator Name Giant Exploration & Production Co Lease Name Adams Ranch Well # D-15  
 Sec. 14 Twp. 35S Rge. 29  East  West County Meade

INSTRUCTIONS: Show important tops and base of formations penetrated. Detail all cores. Report all drill stem tests giving interval tested, time tool open and closed, flowing and shut-in pressures, whether shut-in pressure reached static level, hydrostatic pressures, bottom hole temperature, fluid recovery, and flow rates if gas to surface during test. Attach extra sheet if more space is needed. Attach copy of log.

Drill Stem Tests Taken  Yes  No  
 (Attach Additional Sheets.)  
 Samples Sent to Geological Survey  Yes  No  
 Cores Taken  Yes  No  
 Electric Log Run  Yes  No  
 (Submit Copy.)

Name	Formation Description	
	Top	Bottom
Council Grove	2894'	3690'
Heebner	3690'	4343'
Toronto	4378'	4502'
Lansing	4502'	5076'
Kansas City	5076'	5205'
Marmaton	5205'	5214'

**RECEIVED**  
 KANSAS CORPORATION COMMISSION  
 NOV 15 1991

CASING RECORD <input checked="" type="checkbox"/> New <input type="checkbox"/> Used							CONSERVATION DIVISION WICHITA, KS
Report all strings set-conductor, surface, intermediate, production, etc.							
Purpose of String	Size Hole Drilled	Size Casing Set (In O.D.)	Weight Lbs./Ft.	Setting Depth	Type of Cement	# Sacks Used	Type and Percent Additives
Surface	12-3/4"	8-5/8"	24#	1489.49'	KB Light	600	2% CaCl & 1/4#/sk.
					Premium Class "H"	150	Flocele
						275	2% CaCl
Production	7-7/8"	5-1/2"	15.5#	5215.75'	Light	130	2% CaCl & 1/4#/sk.
					Premium	225	Flocele
PERFORATION RECORD				Acid, Fracture, Shot, Cement Squeeze Record (Amount and Kind of Material Used) Depth			
Shots Per Foot	Specify Footage of Each Interval Perforated						
4	4471'-4477', 5026'-5030', 5121'-5124', 5134'-5136', 5205'-5208'			Acidized with 1,750 gallons 15% HCl acid.			
TUBING RECORD							
Size		Set At		Packer At		Liner Run <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	
2-3/8"		5107' KB					
Date of First Production		Producing Method <input type="checkbox"/> Flowing <input checked="" type="checkbox"/> Pumping <input type="checkbox"/> Gas Lift <input type="checkbox"/> Other (Explain)					
N/A							
Estimated Production Per 24 Hours		Oil Bbls.	Gas Mcf	Water Bbls.	Gas-Oil Ratio	Gravity	
		0	0	756	N/A	N/A	

Disposition of Gas:  Vented  Sold  Used on Lease (If vented, submit ACO-18.)

METHOD OF COMPLETION:  Open Hole  Perforation  Dually Completed  Commingled  Other (Specify) \_\_\_\_\_

Production Interval: 4471'-4477', 5026'-5030', 5121'-5124', 5134'-5136', 5205'-5208'

**\*\* DRILLERS LOG \*\***

**Adams No.D-15  
Section 14-35S-29W  
Meade County, Kansas**

**Ran 36 jts 8 5/8"  
set @ 1491', Cemented w/  
600sx prem + lite, 2%cc**

**Operator: Giant Exploration  
Contractor: Sage Drilling Co.  
Commence: May 6, 1991  
Completed: May 19, 1991**

---


<b>Formation:</b>	<b>From</b>	<b>To</b>	<b>Remarks:</b>
Red Bed	80'	1640'	
Anhy	1640'	2620'	
Shale	2620'	3350'	
Dole	3350'	3785'	
Lime/Shale	3785'	5230'	Ran 120 jts 5 1/2" set @ 5216' cemented w/ 355 sx prem +

**I Certify that this is a true and correct copy of the log on the  
above captioned well to the best of my knowledge**

  
-----  
**Jerry Mason  
Vice President**

**Subscribed and sworn to before me this 21st day of May 1991.**



  
-----  
**Sharon D. Yates  
Notary Public**

**My Commission Expires November 18, 1994**

**RECEIVED**  
KANSAS CORPORATION COMMISSION:

**NOV 15 1991**  
CONSERVATION DIVISION  
WICHITA, KS

14-35-29W