

13-35-34W/85
4/25/86
4/25/87
KCC

RELEASED
Date: **MAY 1 1987**
STATE CORPORATION COMMISSION OF KANSAS
OIL & GAS CONSERVATION DIVISION
FROM CONFIDENTIAL

SIDE ONE **CONFIDENTIAL**

WELL COMPLETION OR RECOMPLETION FORM
ACO-1 WELL HISTORY

DESCRIPTION OF WELL AND LEASE

Operator: License # 5469
Name Anadarko Production Company
Address Box 351
City/State/Zip Liberal, Kansas 67901

Purchaser: Undetermined

Operator Contact Person Paul Gatlin
Phone (316) 624-6253

Contractor: License # 7860
Name Johnson Drilling Company

Wellsite Geologist John Turbeville
Phone 973-8709
KANSAS GEOLOGICAL SURVEY
WICHITA BRANCH JUN 02 1987

Designate Type of Completion
 New Well Re-Entry Workover

Oil SWD Temp Abd
 Gas Inj Delayed Comp.
 Dry Other (Core, Water Supply etc.)

If OWWO: old well info as follows:
Operator
Well Name
Comp. Date Old Total Depth


WELL HISTORY

Drilling Method:
 Mud Rotary Air Rotary Cable
..12/21/84.. ..1/9/85..... ..1/25/85...
Spud Date Date Reached TD Completion Date
..6840..... ..6335.....
Total Depth PBD

Amount of Surface Pipe Set and Cemented at 1614 feet
Multiple Stage Cementing Collar Used? Yes No
If yes, show depth set.....feet
If alternate 2 completion, cement circulated
.....feet depth to.....w/.....SX cmt

API NO. 15-175-20,820
County Seward
..C.. NE. NW.. Sec. 13 Twp. 35S Rge. 34 East West
..4620... Ft North from Southeast Corner of Section
..3300... Ft West from Southeast Corner of Section
(Note: Locate well in section plat below)
Lease Name Fuller C Well # 1
Field Name Wideawake
Producing Formation Morrow
Elevation: Ground 2877 KB 2890

Section Plat

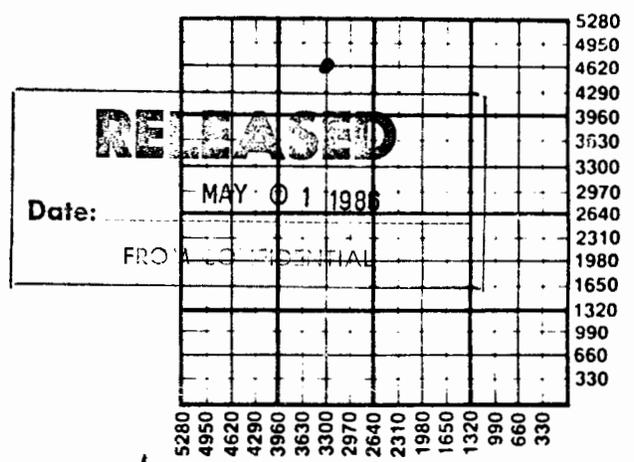

WATER SUPPLY INFORMATION

Disposition of Produced Water: Disposal Repressuring
Docket #

Questions on this portion of the ACO-1 call:
Water Resources Board (913) 296-3717

Source of Water:
Division of Water Resources Permit # T84-997
 Groundwater 4620 Ft North from Southeast Corner (Well) 3300 Ft West from Southeast Corner of Sec 13 Twp 35SRge 34 East West
 Surface Water.....Ft North from Southeast Corner (Stream, pond etc).....Ft West from Southeast Corner Sec Twp Rge East West
 Other (explain).....
(purchased from city, R.W.D. #)

INSTRUCTIONS: This form shall be completed in duplicate and filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within 90 days after completion or recompletion of any well. Rule 82-3-130 and 82-3-107 apply.
Information on side two of this form will be held confidential for a period of 12 months if requested

SIDE TWO

Operator Name Anadarko Production Company Lease Name Fuller "C" Well # 1

Sec. 13 Twp. 35S Rge. 34 East West County Seward

METHOD OF COMPLETION

Production Interval

Disposition of gas: Vented Open Hole Perforation 6206-16, 6218-19
 Sold Other (Specify)
 Used on Lease 6221-27

Drill Stem Tests Taken Yes No
 Samples Sent to Geological Survey Yes No
 Cores Taken Yes No

Formation Description
 Log Sample

Schlumberger ran Compensated Neutron/Lithodensity w/GR and Dual Induction/SFL w/GR.

Name	Top	Bottom
Surface, Clay, Sand	0'	380'
Redbed & Shale	380'	1092'
Glorieta Sand	1092'	1249'
Shale	1249'	1600'
Anhydrite	1600'	1614'
Shale	1614'	2530'
Lime & Shale	2530'	6840'

Date of First Production | Producing Method
 SI WOPL | Flowing Pumping Gas Lift Other (explain).....

Estimated Production Per 24 Hours	Oil	Gas	Water	Gas-Oil Ratio	Gravity
NA Bbls	1950 MCF	-- Bbls	-- CFPB	--	--

CASING RECORD New Used

Report all strings set-conductor, surface, intermediate, production, etc.

Purpose of String	Size Hole Drilled	Size Casing Set (in O.D.)	Weight Lbs/Ft.	Setting Depth	Type of Cement	#Sacks Used	Type and Percent Additives
Surface	12-1/4	8-5/8	24	1614	50/50 Poz	550	3% CaCl
Production	7-7/8"	4-1/2	11.6	6839	Class H Litewate	200	3% CaCl
					50/50 Poz	75	5% CFR-2
						360	10% Salt

PERFORATION RECORD

Acid, Fracture, Shot, Cement Squeeze Record

Shots Per Foot	Specify Footage of Each Interval Perforated	(Amount and Kind of Material Used)	Depth
2	6206-16, 6218-19, 6221-27 (Morrow)	A/1700 gal 7.5% MCA	6206-27 OA
2	6760-66, 6784-6800 (St. Louis)	None	

TUBING RECORD

Size 2-3/8 Set At 6190 Packer at Liner Run Yes No

13-35S-34W

JOHNSON *Drilling Company, Inc.*



OFFICES IN
EVANSVILLE, INDIANA
TEL. (812) 428-4911
OKLAHOMA CITY, OKLAHOMA
TEL. (405) 943-7667

REPLY TO:

3535 N. W. 58th - Suite 710
Oklahoma City, Oklahoma 73112

January 15, 1985

Anadarko Production Company
P. O. Box 351
Liberal, Kansas 67901

Attn: Mr. Paul Gatlin

FEB 13 1985

State of Oklahoma
WARRANT

DRILLERS LOG for:

Fuller "C" # 1
Section 13-35S-34W
Seward County, Kansas

0' - 380'	Surface, Clay, & Sand
380' - 1092'	Redbed & Shale
1092' - 1249'	Glorieta Sand
1249' - 1600'	Shale
1600' - 1614'	Anhydrite
1614' - 2530'	Shale
2530' - 6840'	Lime & Shale

JOHNSON DRILLING COMPANY, INC.

Signed by: Claude D. Moore
Claude D. Moore, Manager

STATE OF OKLAHOMA:

COUNTY OF OKLAHOMA:

Subscribed and sworn to before me this 15th day of January, 1985.

Frank R. [Signature] Notary Public

My Commission Expires: 12-19-85.