

15-023-20016
12-3-41W

CONTRACTOR'S WELL LOG

State Geological Survey
WICHITA, BRANCH

| | |
|------------------|--|
| OPERATOR: | Mountain Petroleum Corp., et. al. |
| CONTRACTOR: | Abercrombie Drilling, Inc. |
| WELL NAME: | SCHAUER #1-12 |
| LOCATION: | C NE NW Section 12-3S-41W Cheyenne County, Kansas |
| SPUD DATE: | May 1, 1976 |
| COMPLETION DATE: | May 2, 1976 |

| | | |
|------|------|---------------------|
| 0 | 60 | Surface clay & sand |
| 60 | 262 | Clay & Sand |
| 262 | 1015 | Shale |
| 1015 | 1500 | Shale & Sand |
| | 1500 | Rotary Total Depth |

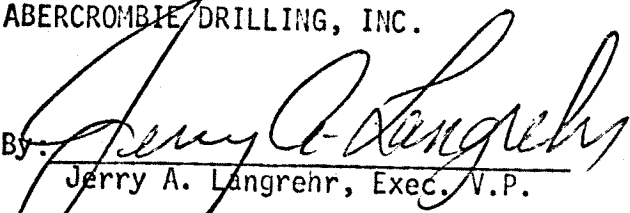
Drilled 262' of 12 1/4" hole. Ran 7 jts. 8 5/8" casing, Set @ 260.70' K.B., Tallied 252.70'. Cemented with 175 sx. 50/50 Posmix, 3% ca. cl. 2% gel. Plug was down @ 3:00 a.m. May 1, 1976.

Ran 38 jts. of 4 1/2" 10.5# casing. Set @ 1498' with 150 sx. 50/50 Posmix, 2% gel. Plug was down @ 6:30 p.m. May 2, 1976. Rotated pipe while pumping plug down.


STATE OF KANSAS)
)
COUNTY OF SEDGWICK) SS

Jerry A. Langrehr, Executive Vice President of Abercrombie Drilling, Inc., does hereby state that the above and foregoing is a true and correct copy of the log of the SCHAUER #1-12, C NE NW, Section 12-3S-41W, Cheyenne County, Kansas.

ABERCROMBIE DRILLING, INC.

By: 
Jerry A. Langrehr, Exec. V.P.

Subscribed and sworn to before me, a Notary Public, in and for the aforesaid county and state as of this 7th day of May, 1976.


Diane Steincamp - Notary Public

My Commission Expires: February 18, 1980.