


Section 25 Township 4 Range 27WWell No. #1 KeenanCompany Texas Company

NORTH

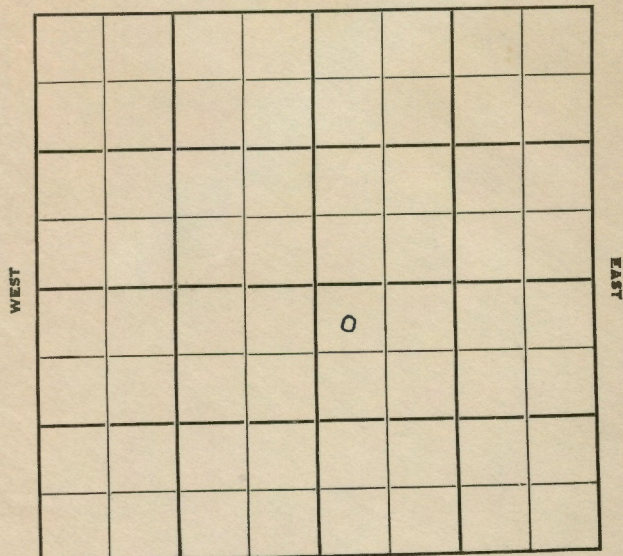

SOUTH

10

Sec. 25 Twp. 4 R. 27 WWell No. #1 Keenan FarmTexas Company Company

Contractor

Wildcat

330 Ft. from N. Line


Ft. from S. Line

Ft. from E. Line

330 Ft. from W. Line

NW NW SE

NORTH



SOUTH

1951

Elev. 2499' REPORT

8/8

MIR

9/19

Oil well TD 3925' 10" @ 349

Top 3220' Heeb 3363'

DST 3204-25 open 1 hr. rec 360' SOCM

Tor. 3381' Lans. 3407'

DST 3385-3412' open 1 1/4 hr. rec 170' OCM

DST 3417-65 open 20 min. rec 450' SOCM

DST 3477-84 open 1 hr. rec 360' gas 150' free oil 30' mud & oil

B KC 3592'

DST 3591-3605 open 1 1/2 hr. rec 120' OCM 115' water

Cong. 3745' Gr. wash 3768'

DST 3772-85 open 1/2 hr. rec 15' mud

Granite 3894' TD 3925' 7" @ 380

CO to 3774' 16/3478-82

16/3484-88 B/6 BO 1 BW 5 hr.

1000 A S/70 BO 125 BW 1 1/4 hrs.

Comp. 162 BOPD 100 BW

COMPLETED

