

API No. 15 — 023 — 20,074
County NumberS. 25 T. 4 R. 37 E
W

Loc. C NW NE

County Cheyenne

Operator

Abraxas Petroleum Corp.

Address

P. O. Box 17485 San Antonio, Texas 78217

Well No.

#1

Lease Name

Gibson

Footage Location

660 feet from (N) line 1980 feet from (E) line

Principal Contractor

Rains & Williamson

Geologist

George B. Sewell

Spud Date

July 14, 1978

Total Depth

4961


P.B.T.D.

4903

Date Completed

Oil Purchaser

Cities Service Company



Elev.: Gr. 3331

DF KB 3340

CASING RECORD

Report of all strings set — surface, intermediate, production, etc.

Purpose of string	Size hole drilled	Size casing set (in O.D.)	Weight lbs/ft.	Setting depth	Type cement	Sacks	Type and percent additives
Surface	12 1/2	8 5/8	23	365	60-40 Pos	250	2% gel 3% CaCl ₂
Production	7 7/8	4 1/2	9.5	4932	50-50 Pos	200	2% gel 10% salt

LINER RECORD

PERFORATION RECORD

Top, ft.	Bottom, ft.	Sacks cement	Shots per ft.	Size & type	Depth interval
			2	.41" jet	4659-69, 4675-80
TUBING RECORD					
Size	Setting depth	Packer set at			
2 3/8	4664	none			


ACID, FRACTURE, SHOT, CEMENT SQUEEZE RECORD

Amount and kind of material used	Depth interval treated
Natural	

INITIAL PRODUCTION

Date of first production		Producing method (flowing, pumping, gas lift, etc.)			
August 25, 1978		pump			
RATE OF PRODUCTION PER 24 HOURS	Oil	Gas	Water	Gas-oil ratio	
	322 bbls.	TSTM MCF	-0- bbls.	TSTM CFPB	
Disposition of gas (vented, used on lease or sold)			Producing interval(s)		
			Cherokee		

INSTRUCTIONS: As provided in KCC Rule 82-2-125, within 90 days after completion of a well, one completed copy of this Drillers Log shall be transmitted to the State Geological Survey of Kansas, 4150 Monroe Street, Wichita, Kansas 67209. Copies of this form are available from the Conservation Division, State Corporation Commission, 3830 So. Meridian (P.O. Box 17027), Wichita, Kansas 66217. Phone AC 316-522-2206. If confidential custody is desired, please note Rule 82-2-125. Drillers Logs will be on open file in the Oil and Gas Division, State Geological Survey of Kansas, Lawrence, Kansas 66044.

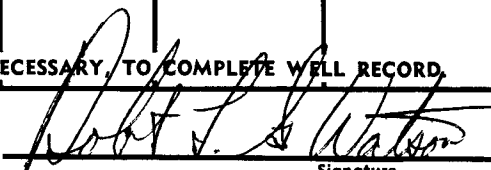Operator Abraxas Petroleum Corporation		DESIGNATE TYPE OF COMP.: OIL, GAS, DRY HOLE, SWDW, ETC.:	
Well No. 1	Lease Name Gibson	oil	
S 25 T 4S R 37 ^R W			
WELL LOG		SHOW GEOLOGICAL MARKERS, LOGS RUN, OR OTHER DESCRIPTIVE INFORMATION.	
Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.			
FORMATION DESCRIPTION, CONTENTS, ETC.	TOP	BOTTOM	NAME
sand sand & shale shale shale & sand shale, sand & lime shale & lime lime & shale		208 361 1111 3722 4005 4712 4961	
USE ADDITIONAL SHEETS, IF NECESSARY, TO COMPLETE WELL RECORD.			
Date Received	 Signature		
	President Title		
	August 25, 1978 Date		

20-200