


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas

Company- BENNETT & ROBERTS OIL  
Farm- Ostmeyer No. 82

SEC. 31 T. 6 R. 19W  
SE NW SW

Total Depth. 3583'  
Comm. 5-7-59 Comp. 5-15-59  
Shot or Treated.  
Contractor. Bennett & Roberts Drlg.  
Issued. 9-5-59

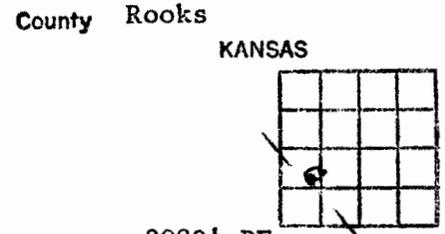

Elevation. 2083' DF

Production. Dry

Figures Indicate Bottom of Formations.

surface soil & clay	40
sand	80
blue shale	196
shale	560
shale & sand	625
sand	655
shale	690
sand	740
shale	785
shale & sand	1200
sand	1310
shale & red bed	1643
Anhydrite	1684
shale & shells	1995
lime & shale	3225
lime	3583 RTD
Total Depth	

TOPS:

Cimarron Anhydrite	1643 (Driller)
Topeka Lime	3074
Heebner Shale	3272
Toronto Lime	3296
Lansing-Kansas City	3313
Base Kansas City	3526
Conglomerate	3558
Arbuckle Dolomite	3573

DST #1 3358-3390', op 60 mins., weak  
blow 10 mins., rec. 8' very slight oil  
cut mud (dead oil) BHP 930#/20 mins.  
IFP 0#, FFP 0#,

DST #2 3455-3492', op 60 mins., light,  
steady blow 60 mins., rec. 80' gas,  
10' clean oil, 30' muddy oil. BHP 710#/20  
mins. IFP 90#, FFP 120#.

Ran Lane Wells Gamma-Neutron