


WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
412 Union National Bk. Bldg., Wichita, Kansas

2-6-27W

Company - CONTINENTAL OIL CO.
Farm - W. R. Foster No. 1

SEC. 2 T. 6 R. 27 W
NWc SE
330'S & 330'E of Cen Sec.

Total Depth. 3849' PB 3838'
Comm. 10-6-44 Comp. 11-9-44
Shot or Treated.
Contractor.
Issued. 4-7-45

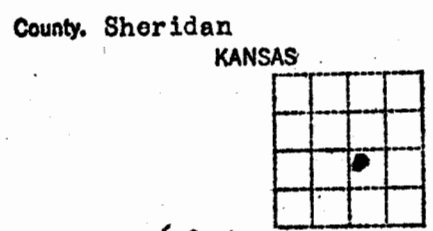

CASING:
10 3/4 " 240'Cem
6" 3845'Cem

Elevation. 2624

Production. Pot 25 B Temp.

Figures Indicate Bottom of Formations.

surface soil & shale	0-250
shale	803
shale, sand & shells	1314
lime sdy & shale	1540
shale & shells	1611
shale	1719
shale & shells	1924
shale	1984
shale & shells	2170
lime	2210
lime brkn	2258
shale & shells	2462
shale	2558
shale & shells	2626
shale	2661
lime	2725
lime brkn	2833
lime	3828
shale	3835
lime	3849
Total Depth	

P.B.3838

Top of Lansing Lime 3609

11-7-44 Drilled cement to 3838 ;
ran radioactivity log; perforated 6"OD casing with Lane-Wells gun perforator as follows:

3824 -3832 with 36 shots, no oil show; 3787 -3799 with 36 shots, hole filled 1100' with oil in 2 hrs; 3735 -3743 with 24 shots, no oil inc; 3705 -13 with 24 shots, hole filled 1000' with oil in 4 hrs; 3694-3702 with 24 shots, oil fill up inc., hole filled 2400' w/ oil in 5 hrs.

11-9-44 Swabbed 185 bbls. oil in 4 hrs to establish a 25 bbl. temporary potential

P.B.T.D. 3838 in Lansing Lime

Note: Footages calculated from pumping derrick floor level except formations