




ENERGY THREE, INC.

P.O. BOX 1505

GREAT BEND, KANSAS 67530

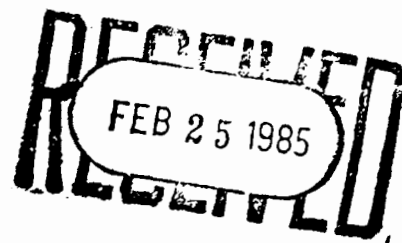

NICHOL # 1: DAILY DRILLING INFORMATION

ELEV. = 2296' GR.
2301' KB.

NE SE SW
SEC. 15-7S-22W
GRAHAM COUNTY, KANSAS

2-14-85 MOVED IN; RIGGED UP, STARTED TO SPUD.

2-15-85 @ 350' - 7:00 A.M. 2-15-85
SET 8 5/8" 23# SURFACE CASING @ 289' - ALLIED CEMENTING COMPANY CEMENTED W/ 170 SACKS 60/40 POZMIX; 3% C.C. & 2% GEL. CEMENT CIRCULATED O.K. PLUG DOWN @ 11:00 P.M. 2-14-85.

2-16-85 DRILLING @ 2550' - 7:00 A.M. 2-16-85
TOP OF ANHYDRITE = ($\neq$ 386)


2-17-85 DRILLING @ 3270' - 7:00 A.M. 2-17-85

2-18-85 @ 3512' - 7:00 A.M. 2-18-85 (ON BOTTOM W/ DST # 1)
D.S.T. # 1: FROM 3490' TO 3512' (TORONTO)
TIMES = 30 - 45 - 30 - 45
RECOVERED 1260' SALT WATER
INITIAL FLOW PRESSURE = 659 - 764
FINAL FLOW PRESSURE = 764 - 764
INITIAL SHUTIN PRESS. = 764 #
FINAL SHUTIN PRESS. = 764 #
TOP OF HEEBNER = 3486' (- 1185)
TOP OF TORONTO = 3510' (- 1209)

2-19-85 @ 3700' - 7:00 A.M. 2-19-85 (CIRCULATING SAMPLES)
MUD VISC. = 52 MUD WT. = 9.6 WATER LOSS = 10
TOP OF LANS. - KC = 3529' (- 1228)

2-20-85 @ 3819' - 7:00 A.M. 2-20-85 (CIRC. SAMPLES)
MUD VISC. = 45 MUD WT. = 9.6 WATER LOSS = 8
D.S.T. # 2: FROM 3773' TO 3800' (LANS.-KC)
TIMES = 30 - 45 - 30 - 45
RECOVERED 40' OF DRILLING MUD.
INITIAL FLOW PRESSURE = 130 - 130
FINAL FLOW PRESSURE = 137 - 130
INITIAL SHUTIN PRESS. = 253 #
FINAL FLOW PRESS. = 239 #

(CONT.)



ENERGY THREE, INC.

P.O. BOX 1505

GREAT BEND, KANSAS 67530

NICHOL # 1: DAILY DRILLING INFORMATION . . (PAGE -2-)

2-21-85 R. T. D. = 3890'
 TOP OF ARBUCKLE = 3870' (- 1569)
 GREAT GUNS RAN OPEN HOLE LOG.

ELECTRIC LOG TOPS:


HEEBNER	=	3482'	(- 1181)
TORONTO	=	3505'	(- 1204)
LANS.-KC	=	3522'	(- 1221)
BASE OF KC	=	3721'	(- 1420)
ARBUCKLE	=	3874'	(- 1573)
LOG T.D.	=	3890'	

D.S.T. # 3: (STRADDLE TEST) FROM 3540' TO 3561'
 "B" ZONE IN LANS.-KC

TIMES = 30 - 45 - 30 - 45
 RECOVERED 780' OF SALT WATER.

INITIAL FLOW PRESSURE	=	86 - 231
FINAL FLOW PRESSURE	=	282 - 405
INITIAL SHUT IN PRESS.	=	936 #
FINAL FLOW PRESS.	=	936 #

PLUGGED WELL AS D & A 2-21-85 P.M.

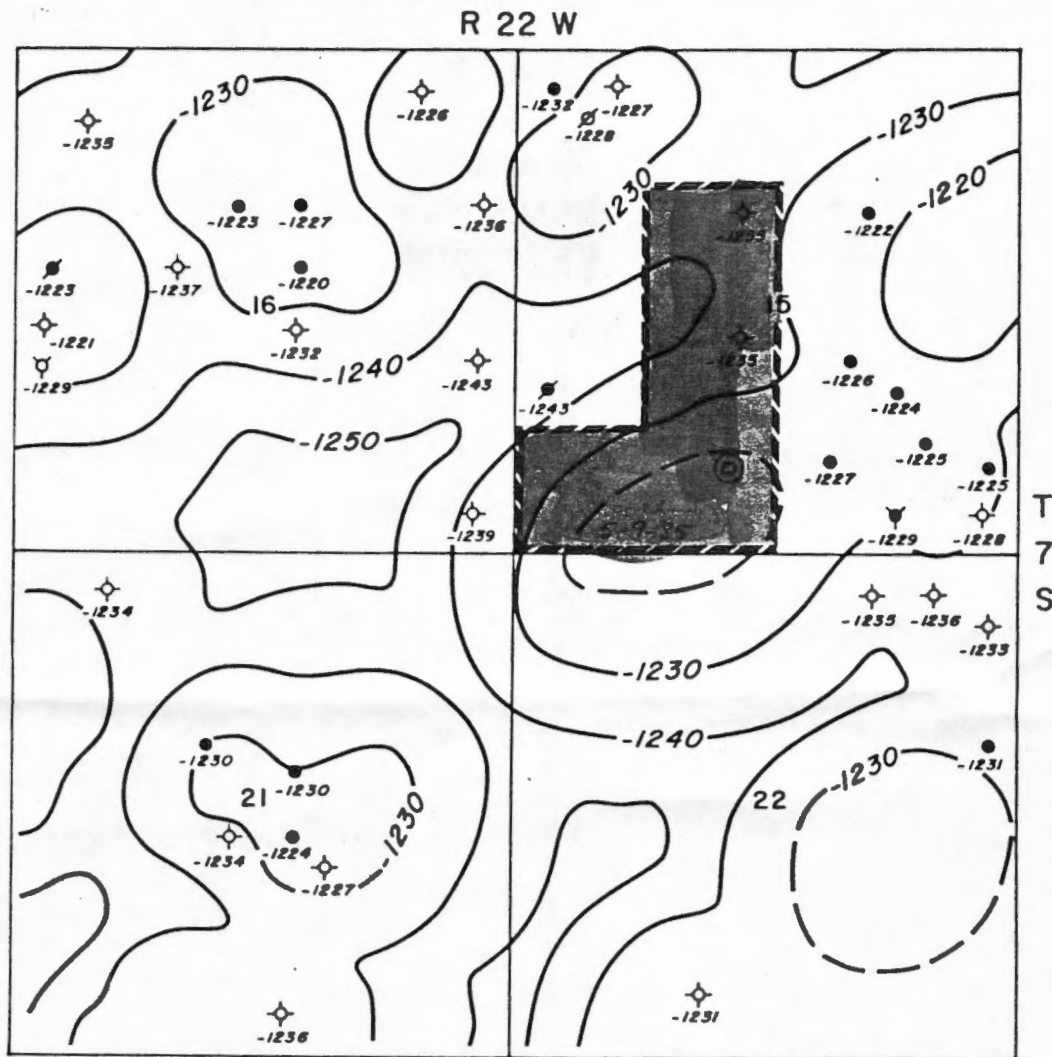

ENERGY THREE, INC.

NICHOL PROSPECT
GRAHAM CO., KANSAS

Geol.: Stephen J. Miller
Date: 2-9-85

Datum: Lansing
C.I. = 10'