

**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

Prepared For: **Fremont Exploration Inc**

12412 St Andrews Dr
Oklahoma City OK 73120

ATTN: Larry Nicholson

26 8 27W Sheridan KS

Brown 1-26

Start Date: 2007.04.26 @ 02:08:00


End Date: 2007.04.26 @ 09:18:20

Job Ticket #: 27883 DST #: 1

Trilobite Testing, Inc

PO Box 362 Hays, KS 67601

ph: 785-625-4778 fax: 785-625-5620



**TRILOBITE
TESTING, INC**

DRILL STEM TEST REPORT

Fremont Exploration Inc

12412 St Andrews Dr
Oklahoma City OK 73120

ATTN: Larry Nicholson

Brown 1-26

26 8 27W Sheridan KS

Job Ticket: 27883

DST#: 1

Test Start: 2007.04.26 @ 02:08:00

GENERAL INFORMATION:

Formation: **L/KC "A,B,C"**

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 04:28:50

Time Test Ended: 09:18:20

Test Type: Conventional Bottom Hole

Tester: Jake Fahrenbruch

Unit No: 22

Interval: **3762.00 ft (KB) To 3811.00 ft (KB) (TVD)**

Total Depth: 3811.00 ft (KB) (TVD)

Hole Diameter: 7.88 inches Hole Condition: Fair

Reference Elevations: 2600.00 ft (KB)

2595.00 ft (CF)

KB to GR/CF: 5.00 ft

Serial #: 6799

Inside

Press@RunDepth: 667.83 psig @ 3763.00 ft (KB)

Start Date: 2007.04.26

End Date:

2007.04.26

Capacity: 7000.00 psig

Last Calib.: 2007.04.26

Start Time: 02:08:02

End Time:


09:18:19

Time On Btm: 2007.04.26 @ 04:28:30

Time Off Btm: 2007.04.26 @ 07:19:19

TEST COMMENT: IF Strong blow BOB 4 minutes
ISI Bled off weak surface blow back late in shut it period
FF Strong blow BOB 5.5 minutes
FSI Bled off no blow back

Pressure vs. Time

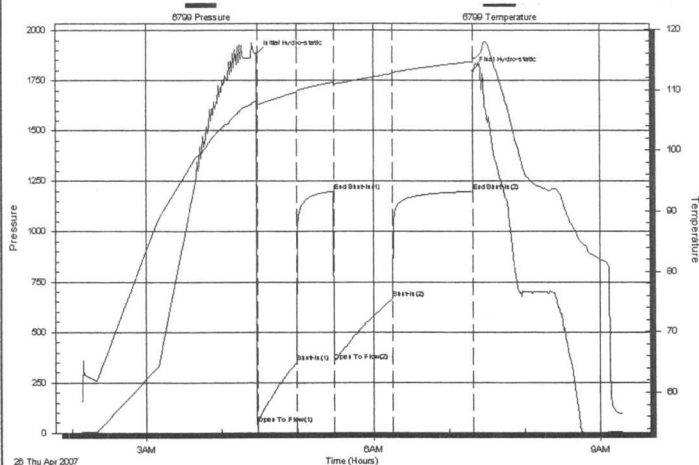

PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	1882.07	108.12	Initial Hydro-static
1	40.25	107.56	Open To Flow (1)
31	351.05	109.51	Shut-In(1)
61	1201.31	111.22	End Shut-In(1)
61	356.49	110.95	Open To Flow (2)
107	667.83	112.63	Shut-In(2)
171	1199.98	114.63	End Shut-In(2)
171	1798.78	114.99	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
1400.00	Water (w/trace of Oil on top of Water)	18.55
0.00	RW=.16 OHMS@44degF=78000ppmCh	0.00

Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)
--	----------------	-----------------	------------------



**TRILOBITE
TESTING, INC**

DRILL STEM TEST REPORT

TOOL DIAGRAM

Fremont Exploration Inc

12412 St Andrews Dr
Oklahoma City OK 73120

ATTN: Larry Nicholson

Brown 1-26

26 8 27W Sheridan KS

Job Ticket: 27883

DST#: 1

Test Start: 2007.04.26 @ 02:08:00

Tool Information

Drill Pipe:	Length: 3627.00 ft	Diameter: 3.80 inches	Volume: 50.88 bbl	Tool Weight:	2500.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer:	25000.00 lb
Drill Collar:	Length: 120.00 ft	Diameter: 2.25 inches	Volume: 0.59 bbl	Weight to Pull Loose:	75000.00 lb
		Total Volume:	51.47 bbl	Tool Chased	0.00 ft
Drill Pipe Above KB:	8.00 ft			String Weight: Initial	58000.00 lb
Depth to Top Packer:	3762.00 ft			Final	68000.00 lb
Depth to Bottom Packer:	ft				
Interval between Packers:	49.00 ft				
Tool Length:	72.00 ft				
Number of Packers:	2	Diameter:	6.75 inches		
Tool Comments:					

Tool Description

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
Shut In Tool	5.00			3744.00	
Hydraulic tool	5.00			3749.00	
Safety Joint	3.00			3752.00	
Packer	5.00			3757.00	23.00 Bottom Of Top Packer
Packer	5.00			3762.00	
Stubb	1.00			3763.00	
Recorder	0.00	6799	Inside	3763.00	
Perforations	11.00			3774.00	
Blank Spacing	34.00			3808.00	
Recorder	0.00	3354	Outside	3808.00	
Bullnose	3.00			3811.00	49.00 Bottom Packers & Anchor

Total Tool Length: 72.00



TRILOBITE
TESTING, INC

DRILL STEM TEST REPORT

FLUID SUMMARY

Fremont Exploration Inc

Brown 1-26

12412 St Andrew s Dr
Oklahoma City OK 73120

26 8 27W Sheridan KS

Job Ticket: 27883

DST#: 1

ATTN: Larry Nicholson

Test Start: 2007.04.26 @ 02:08:00

Mud and Cushion Information

Mud Type: Gel Chem

Cushion Type:

Oil API:

deg API

Mud Weight: 9.00 lb/gal

Cushion Length:

ft

Water Salinity:

ppm

Viscosity: 54.00 sec/qt

Cushion Volume:

bbl

Water Loss: 6.79 in³

Gas Cushion Type:

Resistivity: ohm.m

Gas Cushion Pressure:

psig

Salinity: 1200.00 ppm

Filter Cake: inches

Recovery Information

Recovery Table

Length ft	Description	Volume bbl
1400.00	Water (w/trace of Oil on top of Water)	18.545
0.00	RW=.16 OHMS@44degF=78000ppmChl	0.000

Total Length: 1400.00 ft Total Volume: 18.545 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0


Serial #:

Laboratory Name:

Laboratory Location:

Recovery Comments:

Pressure vs. Time

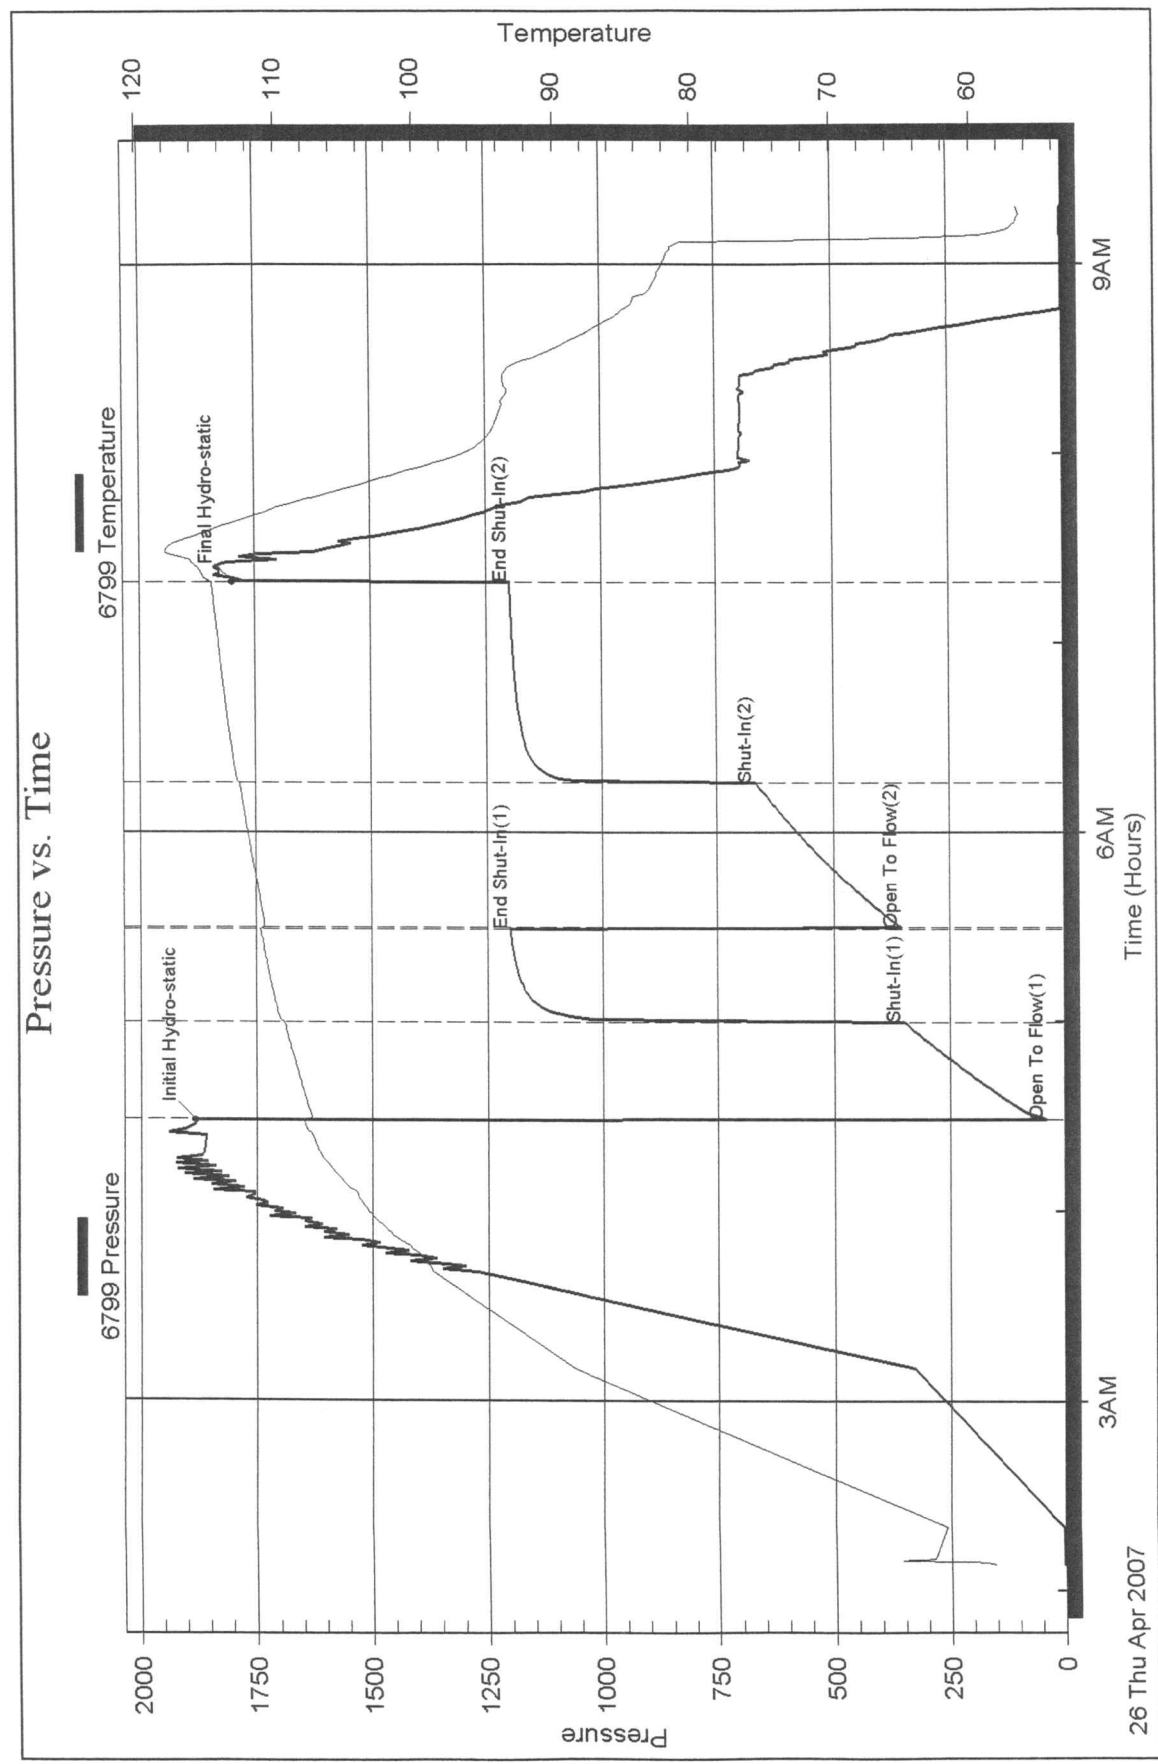



DRILL STEM TEST REPORT

Prepared For: **Fremont Exploration Inc**

12412 St Andrews Dr
Oklahoma City OK 73120

ATTN: Larry Nicholson

26 8 27W Sheridan KS

Brown 1-26

Start Date: 2007.04.26 @ 18:08:09


End Date: 2007.04.27 @ 00:26:18

Job Ticket #: 27884 DST #: 2

Trilobite Testing, Inc

PO Box 362 Hays, KS 67601

ph: 785-625-4778 fax: 785-625-5620



TRILOBITE
TESTING, INC

DRILL STEM TEST REPORT

Fremont Exploration Inc

12412 St Andrews Dr
Oklahoma City OK 73120

ATTN: Larry Nicholson

Brown 1-26

26 8 27W Sheridan KS

Job Ticket: 27884

DST#: 2

Test Start: 2007.04.26 @ 18:08:09

GENERAL INFORMATION:

Formation: **F&G**

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 20:07:59

Time Test Ended: 00:26:18

Test Type: Conventional Bottom Hole

Tester: Jake Fahrenbruch

Unit No: 22

Interval: **3839.00 ft (KB) To 3853.00 ft (KB) (TVD)**

Total Depth: 3853.00 ft (KB) (TVD)

Hole Diameter: 7.88 inches Hole Condition: Fair

Reference Elevations: 2600.00 ft (KB)

2595.00 ft (CF)

KB to GR/CF: 5.00 ft

Serial #: 6799 Inside

Press@RunDepth: 16.87 psig @ 3840.00 ft (KB)

Start Date: 2007.04.26

End Date:

2007.04.27

Start Time: 18:08:11

End Time:

00:26:19

Capacity: 7000.00 psig

Last Calib.: 2007.04.27

Time On Btm: 2007.04.26 @ 20:07:49


Time Off Btm: 2007.04.26 @ 22:23:39

TEST COMMENT: IF Very weak surface blow died after 8 minutes

ISI No blow back

FF No blow

FSI No blow back

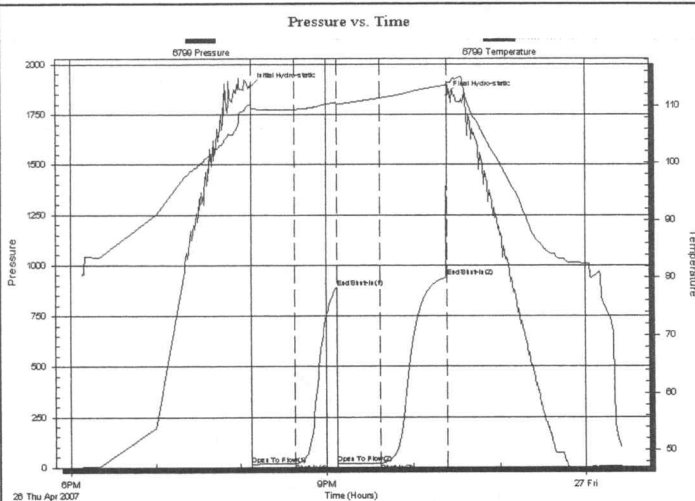

PRESSURE SUMMARY


Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	1888.50	110.18	Initial Hydro-static
1	13.80	109.08	Open To Flow (1)
31	16.41	109.33	Shut-In(1)
60	891.39	110.57	End Shut-In(1)
60	16.67	110.28	Open To Flow (2)
90	16.87	111.31	Shut-In(2)
136	940.32	113.53	End Shut-In(2)
136	1846.34	113.97	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
5.00	OSM 2%O 98%M	0.02

Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)
--	----------------	-----------------	------------------



**TRILOBITE
TESTING, INC**

DRILL STEM TEST REPORT

TOOL DIAGRAM

Fremont Exploration Inc
12412 St Andrews Dr
Oklahoma City OK 73120

ATTN: Larry Nicholson


Brown 1-26
26 8 27W Sheridan KS
Job Ticket: 27884 **DST#: 2**
Test Start: 2007.04.26 @ 18:08:09

Tool Information

Drill Pipe:	Length: 3722.00 ft	Diameter: 3.80 inches	Volume: 52.21 bbl	Tool Weight: 2500.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer: 20000.00 lb
Drill Collar:	Length: 120.00 ft	Diameter: 2.25 inches	Volume: 0.59 bbl	Weight to Pull Loose: 64000.00 lb
		Total Volume: 52.80 bbl		Tool Chased 0.00 ft
Drill Pipe Above KB:	26.00 ft			String Weight: Initial 58000.00 lb
Depth to Top Packer:	3839.00 ft			Final 58000.00 lb
Depth to Bottom Packer:	ft			
Interval between Packers:	14.00 ft			
Tool Length:	37.00 ft			
Number of Packers:	2	Diameter: 6.75 inches		
Tool Comments:				

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
------------------	-------------	------------	----------	------------	----------------

Shut In Tool	5.00			3821.00	
Hydraulic tool	5.00			3826.00	
Safety Joint	3.00			3829.00	
Packer	5.00			3834.00	23.00 Bottom Of Top Packer
Packer	5.00			3839.00	
Stubb	1.00			3840.00	
Recorder	0.00	6799	Inside	3840.00	
Perforations	10.00			3850.00	
Recorder	0.00	3354	Outside	3850.00	
Bullnose	3.00			3853.00	14.00 Bottom Packers & Anchor
Total Tool Length:	37.00				



**TRILOBITE
TESTING, INC**

DRILL STEM TEST REPORT

FLUID SUMMARY

Fremont Exploration Inc

12412 St Andrews Dr
Oklahoma City OK 73120

ATTN: Larry Nicholson

Brown 1-26

26 8 27W Sheridan KS

Job Ticket: 27884

DST#: 2

Test Start: 2007.04.26 @ 18:08:09

Mud and Cushion Information

Mud Type: Gel Chem

Mud Weight: 9.00 lb/gal

Viscosity: 49.00 sec/qt

Water Loss: 7.19 in³

Resistivity: ohm.m

Salinity: 1900.00 ppm

Filter Cake: inches

Cushion Type:

Cushion Length:

Cushion Volume:

Gas Cushion Type:

Gas Cushion Pressure:

ft

bbl

psig

Oil API:

Water Salinity:

deg API

ppm

Recovery Information

Recovery Table

Length ft	Description	Volume bbl
5.00	OSM 2%O 98%M	0.025

Total Length: 5.00 ft Total Volume: 0.025 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0

Serial #:

Laboratory Name:

Laboratory Location:

Recovery Comments:

DST Test Number: 2


26 8 27W Sheridan KS

Fremont Exploration Inc

Inside

Serial #: 6799

Pressure vs. Time

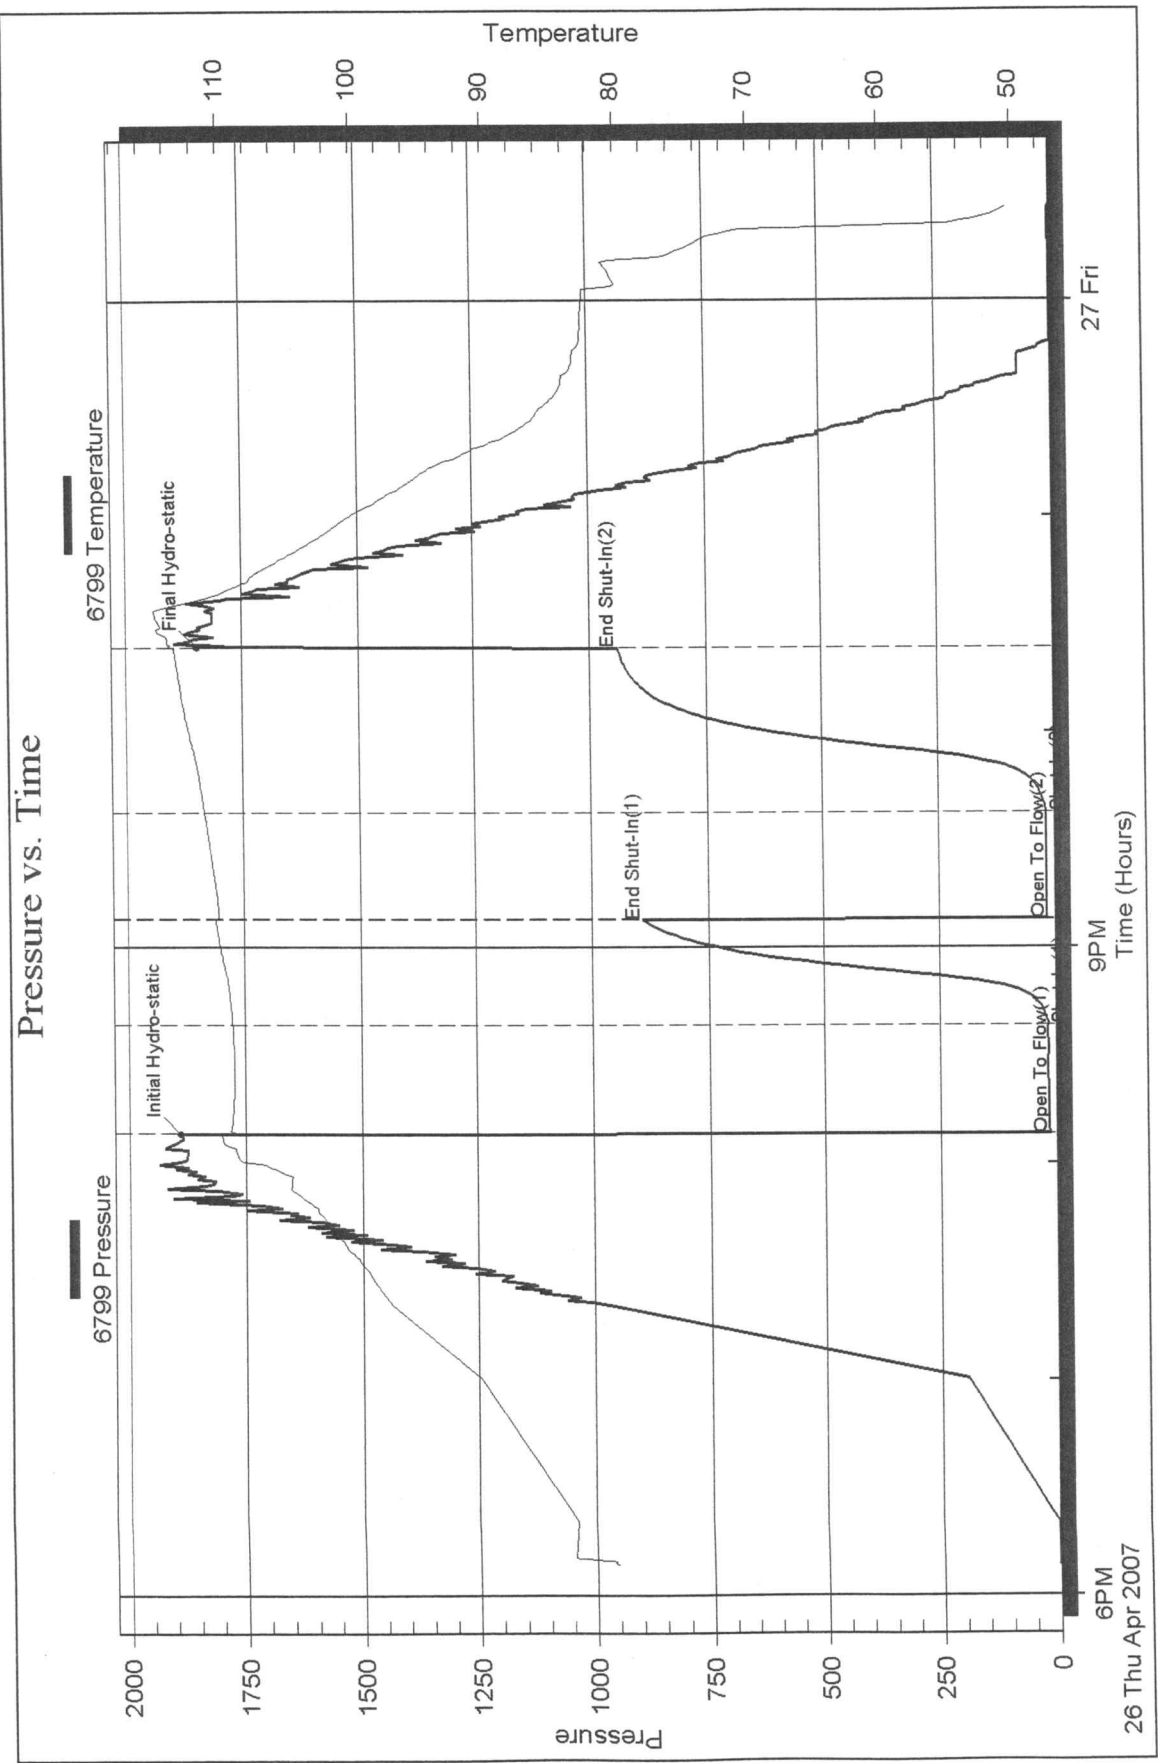

Ref. No: 27884

Trilobite Testing, Inc



DRILL STEM TEST REPORT

Prepared For: **Fremont Exploration Inc**

12412 St Andrews Dr
Oklahoma City OK 73120

ATTN: Larry Nicholson

26 8 27W Sheridan KS

Brown 1-26

Start Date: 2007.04.27 @ 11:06:28


End Date: 2007.04.27 @ 17:18:58

Job Ticket #: 27885 DST #: 3

Trilobite Testing, Inc

PO Box 362 Hays, KS 67601

ph: 785-625-4778 fax: 785-625-5620



TRILOBITE
TESTING, INC

DRILL STEM TEST REPORT

Fremont Exploration Inc

12412 St Andrews Dr
Oklahoma City OK 73120

ATTN: Larry Nicholson

Brown 1-26

26 8 27W Sheridan KS

Job Ticket: 27885

DST#: 3

Test Start: 2007.04.27 @ 11:06:28

GENERAL INFORMATION:

Formation: "H-I-J"

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 12:46:28

Time Test Ended: 17:18:58

Test Type: Conventional Bottom Hole

Tester: Jake Fahrenbruch

Unit No: 22

Interval: 3862.00 ft (KB) To 3932.00 ft (KB) (TVD)

Total Depth: 3932.00 ft (KB) (TVD)

Hole Diameter: 7.88 inches Hole Condition: Fair

Reference Elevations: 2600.00 ft (KB)

2595.00 ft (CF)

KB to GR/CF: 5.00 ft

Serial #: 6799

Inside

Press@RunDepth: 106.24 psig @ 3863.00 ft (KB)

Start Date: 2007.04.27

End Date:

2007.04.27

Start Time: 11:06:30

End Time:

17:18:58

Capacity: 7000.00 psig

Last Calib.: 2007.04.27

Time On Btm: 2007.04.27 @ 12:46:18


Time Off Btm: 2007.04.27 @ 15:35:58

TEST COMMENT: IF Strong blow BOB in 10 minutes 45 seconds.

ISI Bled off no blow back

FF Fair blow built to 6.25 " in bucket

FSI bled off no blow back

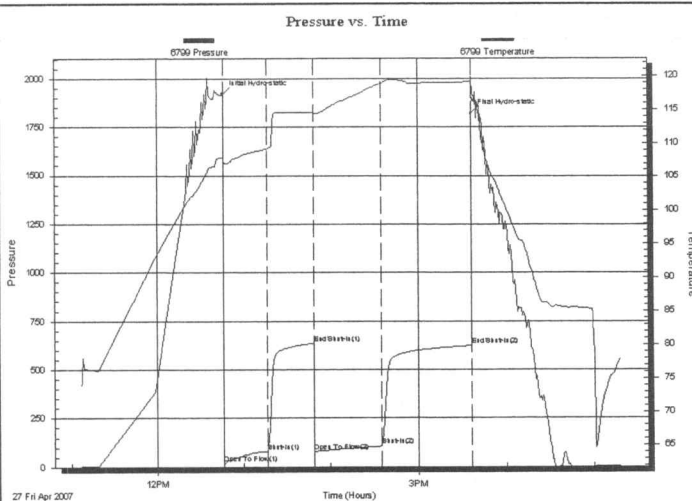

PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	1919.32	107.79	Initial Hydro-static
1	18.41	106.64	Open To Flow (1)
31	79.67	109.14	Shut-In (1)
63	634.90	114.59	End Shut-In (1)
63	80.18	114.42	Open To Flow (2)
109	106.24	118.83	Shut-In (2)
170	623.18	119.08	End Shut-In (2)
170	1819.14	119.86	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
120.00	Salt Water	0.59
60.00	MCW 30%M 70%W	0.84
75.00	WCM 30%W 70%m	1.05
0.00	RW= .17 OHMS @ 67 deg F = 47000 ppm Ch	0.00
0.00	120' GIP	0.00

Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)
--	----------------	-----------------	------------------



TRILOBITE
TESTING, INC

DRILL STEM TEST REPORT

TOOL DIAGRAM

Fremont Exploration Inc

12412 St Andrews Dr
Oklahoma City OK 73120

ATTN: Larry Nicholson

Brown 1-26

26 8 27W Sheridan KS

Job Ticket: 27885

DST#: 3

Test Start: 2007.04.27 @ 11:06:28

Tool Information

Drill Pipe:	Length: 3722.00 ft	Diameter: 3.80 inches	Volume: 52.21 bbl	Tool Weight:	2500.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer:	25000.00 lb
Drill Collar:	Length: 120.00 ft	Diameter: 2.25 inches	Volume: 0.59 bbl	Weight to Pull Loose:	70000.00 lb
			Total Volume: 52.80 bbl	Tool Chased	0.00 ft
Drill Pipe Above KB:	3.00 ft			String Weight: Initial	60000.00 lb
Depth to Top Packer:	3862.00 ft			Final	61000.00 lb
Depth to Bottom Packer:	ft				
Interval between Packers:	70.00 ft				
Tool Length:	93.00 ft				
Number of Packers:	2	Diameter: 6.75 inches			
Tool Comments:					

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
Shut In Tool	5.00			3844.00	
Hydraulic tool	5.00			3849.00	
Safety Joint	3.00			3852.00	
Packer	5.00			3857.00	23.00 Bottom Of Top Packer
Packer	5.00			3862.00	
Stubb	1.00			3863.00	
Recorder	0.00	6799	Inside	3863.00	
Perforations	33.00			3896.00	
Blank Spacing	33.00			3929.00	
Recorder	0.00	10270	Outside	3929.00	
Bullnose	3.00			3932.00	70.00 Bottom Packers & Anchor

Total Tool Length: 93.00



**TRILOBITE
TESTING, INC**

DRILL STEM TEST REPORT

FLUID SUMMARY

Fremont Exploration Inc

Brown 1-26

12412 St Andrews Dr
Oklahoma City OK 73120

26 8 27W Sheridan KS

Job Ticket: 27885

DST#: 3

ATTN: Larry Nicholson

Test Start: 2007.04.27 @ 11:06:28

Mud and Cushion Information

Mud Type: Gel Chem

Cushion Type:

Oil API:

deg API

Mud Weight: 9.00 lb/gal

Cushion Length:

ft

Water Salinity:

ppm

Viscosity: 55.00 sec/qt

Cushion Volume:

bbl

Water Loss: 6.79 in³

Gas Cushion Type:

Resistivity: ohm.m

Gas Cushion Pressure:

psig

Salinity: 1900.00 ppm

Filter Cake: inches

Recovery Information

Recovery Table

Length ft	Description	Volume bbl
120.00	Salt Water	0.590
60.00	MCW 30%M 70%W	0.842
75.00	WCM 30%W70%m	1.052
0.00	RW=.17 OHMS@67degF=47000ppmChl	0.000
0.00	120' GIP	0.000

Total Length: 255.00 ft

Total Volume: 2.484 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0


Serial #:


Laboratory Name:

Laboratory Location:

Recovery Comments:

Pressure vs. Time

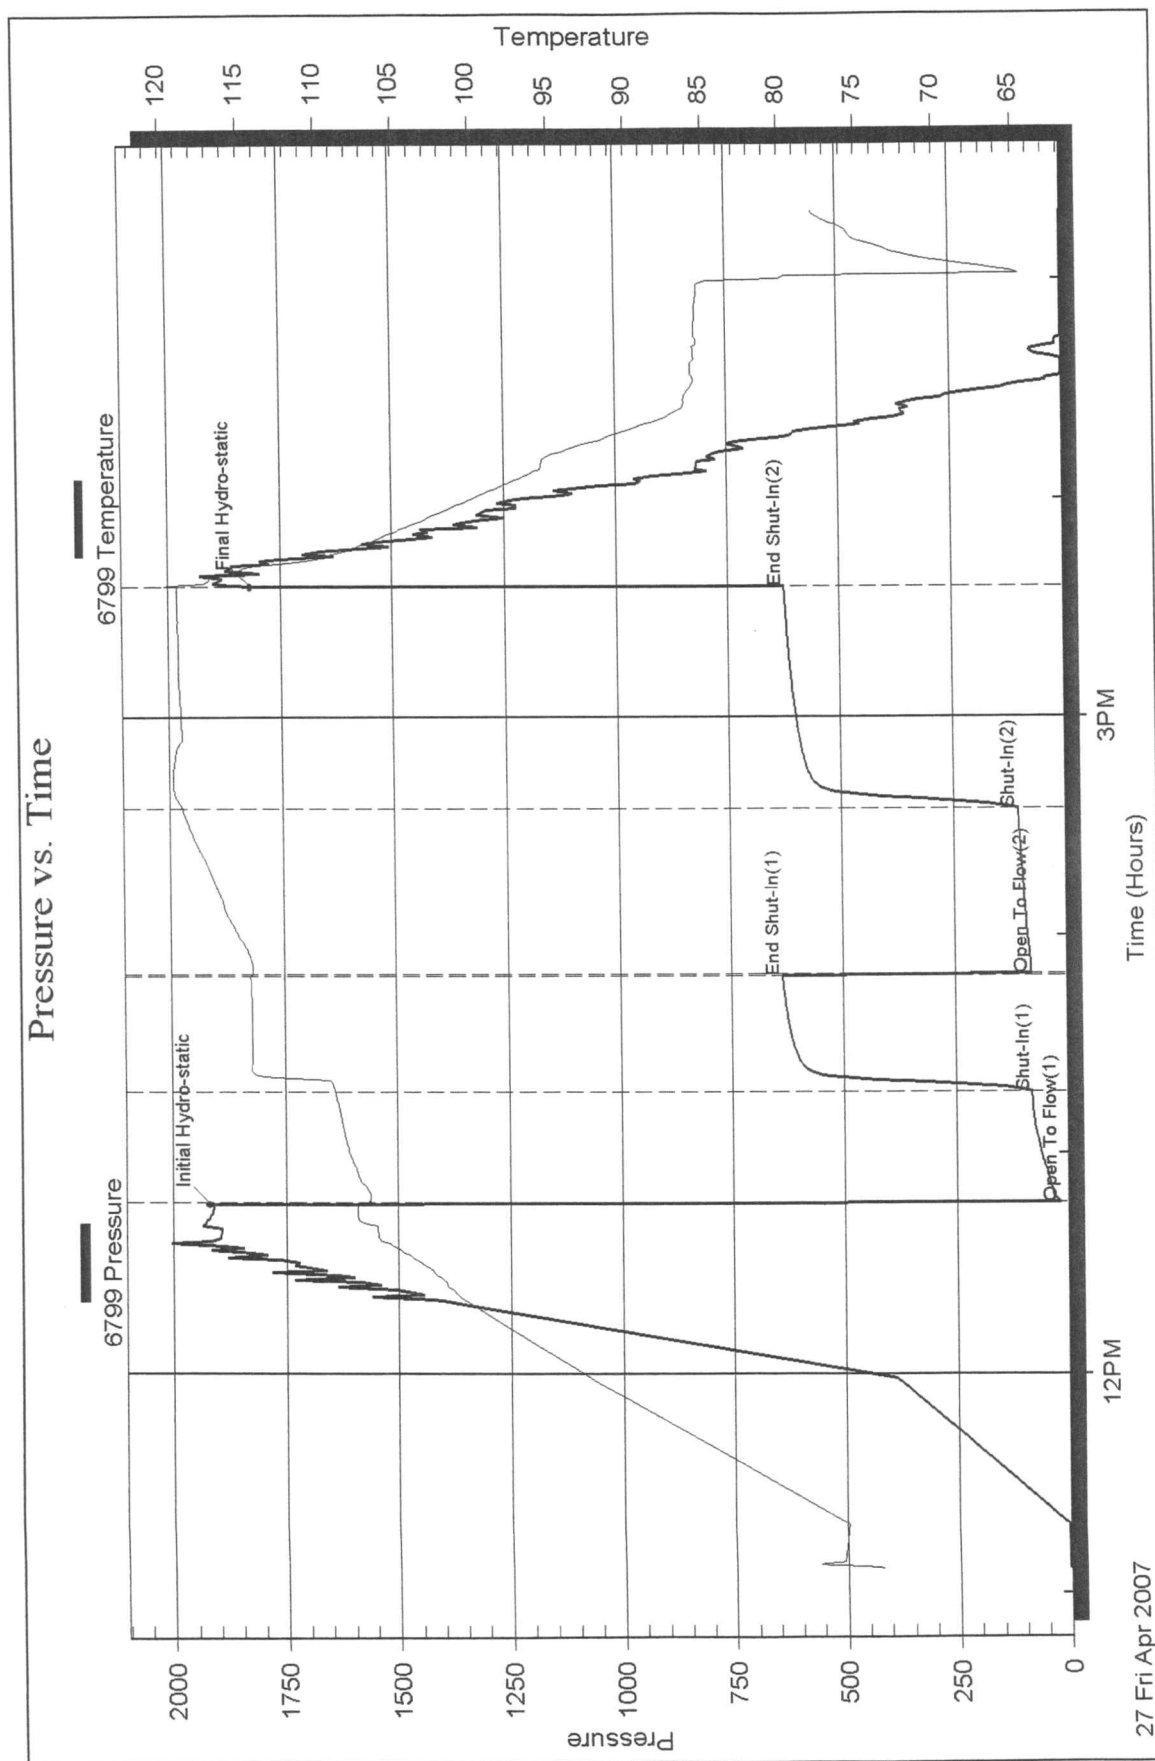



**TRILOBITE
TESTING, INC.**

DRILL STEM TEST REPORT

Prepared For: **Fremont Exploration Inc**

12412 St Andrews Dr
Oklahoma City OK 73120

ATTN: Larry Nicholson

26 8 27W Sheridan KS

Brown 1-26

Start Date: 2007.04.28 @ 02:11:30

End Date: 2007.04.28 @ 09:07:39

Job Ticket #: 27886 DST #: 4

Trilobite Testing, Inc

PO Box 362 Hays, KS 67601

ph: 785-625-4778 fax: 785-625-5620



TRILOBITE
TESTING, INC

DRILL STEM TEST REPORT

Fremont Exploration Inc

12412 St Andrews Dr
Oklahoma City OK 73120

ATTN: Larry Nicholson

Brown 1-26

26 8 27W Sheridan KS

Job Ticket: 27886

DST#: 4

Test Start: 2007.04.28 @ 02:11:30

GENERAL INFORMATION:

Formation: **K&L**

Deviated: No Whipstock: ft (KB)

Time Tool Opened: 04:42:00

Time Test Ended: 09:07:39

Test Type: Conventional Bottom Hole

Tester: Jake Fahrenbruch

Unit No: 22

Interval: **3931.00 ft (KB) To 3995.00 ft (KB) (TVD)**

Total Depth: 3995.00 ft (KB) (TVD)

Hole Diameter: 7.88 inches Hole Condition: Fair

Reference Elevations: 2600.00 ft (KB)

2595.00 ft (CF)

KB to GR/CF: 5.00 ft

Serial #: 6799 Inside

Press@RunDepth: 19.38 psig @ 3932.00 ft (KB)

Start Date: 2007.04.28

End Date:

2007.04.28

Start Time: 02:11:32

End Time:

09:07:40

Capacity: 7000.00 psig

Last Calib.: 2007.04.28

Time On Btm: 2007.04.28 @ 04:41:50


Time Off Btm: 2007.04.28 @ 06:57:50

TEST COMMENT: IF Weak blow built to .75 " in bucket

ISI Bled off no blow back

FF No blow

FSI No blow back

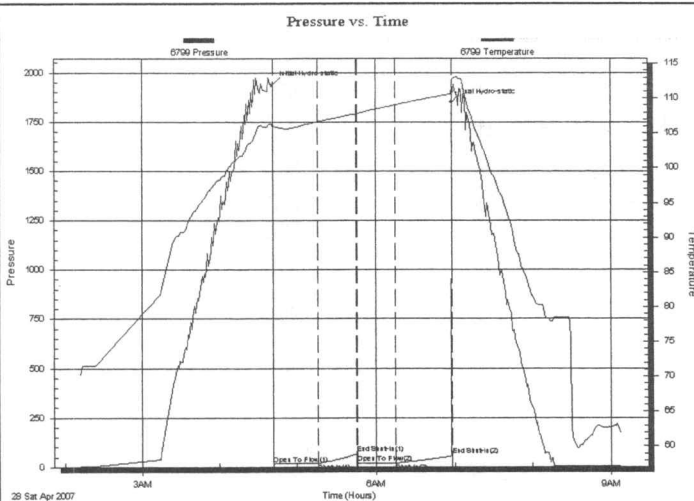

PRESSURE SUMMARY

Time (Min.)	Pressure (psig)	Temp (deg F)	Annotation
0	1937.89	106.38	Initial Hydro-static
1	15.66	105.77	Open To Flow (1)
35	17.54	106.64	Shut-In (1)
64	67.25	107.80	End Shut-In (1)
64	18.00	107.80	Open To Flow (2)
93	19.38	109.04	Shut-In (2)
136	55.72	110.63	End Shut-In (2)
137	1849.18	111.80	Final Hydro-static

Recovery

Length (ft)	Description	Volume (bbl)
10.00	Drilling Mud 100%M	0.05

Gas Rates

	Choke (inches)	Pressure (psig)	Gas Rate (Mcf/d)
--	----------------	-----------------	------------------



TRILOBITE
TESTING, INC

DRILL STEM TEST REPORT

TOOL DIAGRAM

Fremont Exploration Inc

12412 St Andrews Dr
Oklahoma City OK 73120

ATTN: Larry Nicholson

Brown 1-26

26 8 27W Sheridan KS

Job Ticket: 27886

DST#: 4

Test Start: 2007.04.28 @ 02:11:30


Tool Information

Drill Pipe:	Length: 3814.00 ft	Diameter: 3.80 inches	Volume: 53.50 bbl	Tool Weight: 2500.00 lb
Heavy Wt. Pipe:	Length: 0.00 ft	Diameter: 0.00 inches	Volume: 0.00 bbl	Weight set on Packer: 25000.00 lb
Drill Collar:	Length: 120.00 ft	Diameter: 2.25 inches	Volume: 0.59 bbl	Weight to Pull Loose: 74000.00 lb
			Total Volume: 54.09 bbl	Tool Chased 0.00 ft
Drill Pipe Above KB:	26.00 ft			String Weight: Initial 60000.00 lb
Depth to Top Packer:	3931.00 ft			Final 60000.00 lb
Depth to Bottom Packer:	ft			
Interval between Packers:	64.00 ft			
Tool Length:	87.00 ft			
Number of Packers:	2	Diameter: 6.75 inches		
Tool Comments:				

Tool Description	Length (ft)	Serial No.	Position	Depth (ft)	Accum. Lengths
------------------	-------------	------------	----------	------------	----------------

Shut In Tool	5.00			3913.00	
Hydraulic tool	5.00			3918.00	
Safety Joint	3.00			3921.00	
Packer	5.00			3926.00	23.00 Bottom Of Top Packer
Packer	5.00			3931.00	
Stubb	1.00			3932.00	
Recorder	0.00	6799	Inside	3932.00	
Perforations	27.00			3959.00	
Blank Spacing	33.00			3992.00	
Recorder	0.00	10270	Outside	3992.00	
Bullnose	3.00			3995.00	64.00 Bottom Packers & Anchor

Total Tool Length: 87.00



TRILOBITE
TESTING, INC

DRILL STEM TEST REPORT

FLUID SUMMARY

Fremont Exploration Inc

Brown 1-26

12412 St Andrew s Dr
Oklahoma City OK 73120

26 8 27W Sheridan KS

Job Ticket: 27886

DST#: 4

ATTN: Larry Nicholson

Test Start: 2007.04.28 @ 02:11:30

Mud and Cushion Information

Mud Type: Gel Chem

Cushion Type:

Oil API:

deg API

Mud Weight: 9.00 lb/gal

Cushion Length:

ft

Water Salinity:

ppm

Viscosity: 53.00 sec/qt

Cushion Volume:

bbl

Water Loss: 6.79 in³

Gas Cushion Type:

Resistivity: ohm.m

Gas Cushion Pressure:

psig

Salinity: 1900.00 ppm

Filter Cake: inches

Recovery Information

Recovery Table

Length ft	Description	Volume bbl
10.00	Drilling Mud 100%M	0.049

Total Length: 10.00 ft Total Volume: 0.049 bbl

Num Fluid Samples: 0

Num Gas Bombs: 0

Serial #:

Laboratory Name:

Laboratory Location:

Recovery Comments:

Pressure vs. Time

