

Rooks


KANSAS

SECTION 19 TOWNSHIP 9 RANGE 18W

WELL NO. #1 Hilgers

COMPANY Osage Oil

NORTH

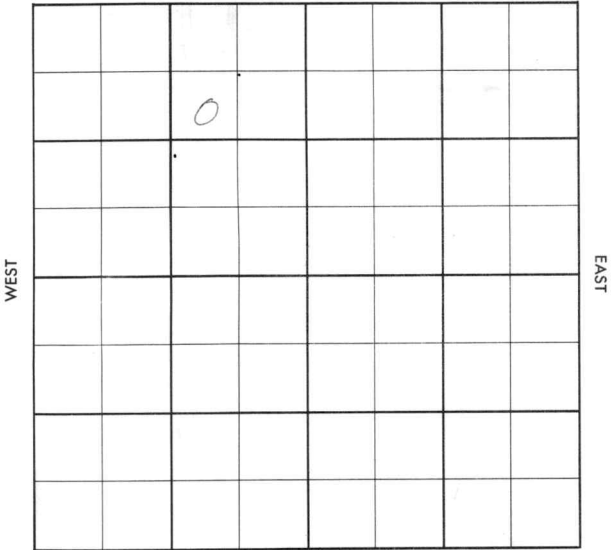

SOUTH

Rooks

KANSAS

SEC.	TWP.	R.
19	9	18W

WELL NO.

#1 Hilgers

FARM

COMPANY

Osage Oil

CONTRACTOR

Dutch George

Baumgartner


Ft. from N. Line

Ft. from S. Line

Ft. from E. Line

Ft. from W. Line

SW NE NW



	ELEVATION	REPORT
1956	2150'	
5-2	Comm. 4-25-56 8" @ 162 w/125 Drlg. 2610 Anh. 1500'	
7-3	DST 3310-30 op 90 min. rec. 30' gas / 70' HOCM / 60' mdy oil, BHP 190#. DST 3362-93 op 1 hr., rec. 470' SW, BHP 870#. DST 3404-18, op 90 min., 60' GIP, rec 40' HOCM / 60' oily WCM, BHP 680#. DST 3561-68, op 1 hr., rec. 90' HOCM, / 630' free oil, BHP 980#. 5 1/2" @ 3567 w/100 CO 3568 S/ 21 2/3 BO in 1 hr, FU 1500' oil, 2 hrs., S/ Av. 13 boph, no/wtr, 800' O.B., 3hrs P/ 37 BO, no/wtr., 12 hrs. CO 3760', 500 A S/ 45# BO, 3 hrs., no wtr. P/ 51 BO, no/ wtr., 24 hrs., P/ 25 bopd, no/wtr. H. 3280'; L. 3718'; A. 3560'; TD 3568'/	COMPLETED

County Rooks Elev. 2150
 Sec. 19 Twp. 9 Rge. 18W
 Company Osage Oil
 Farm Name Hilgers No. 1

TOPS	DEPTH	LOG	DATUM	Loc. in Sec.
Anb.	1500			SW NE NW
Tp.				
H.	3280			
Tr.				
Dg.				
Bl.				
L.	3318			Geol.
K.C.				Contr.
B.K.C.				Ditch George
Ce.				Pool
C.				Baumgartner
M.				
M.				
K.				
Mz.				
Ma.				
V.				
S.				
S.				
A.	3560			
R.				
Pe.				
G.				
TD.	3568			

Date Comm. 4-25-56 JUL 3 1956

8" @ 162/125 drlg. 2610 MAY 9 '56

DST 3310-30 98" rec 30' gas
 +70' HOCM +60' Mdy oil BHP
 190 DST 3362-93 1hr rec
 470' SW BHP 870 DST 3404-18
 90" 60' GIP rec 40' HOC6CM
 +60' oily WCM BHP 680 DST
 3561-68 MAY 15 '56 on 1hr rec 90' HOCM
 +630' Free oil BHP 980 5 1/2

19-9-18W

SW NE NW

@ 3567/100 MAY 23 '56 CO 3568 TD

1/2 & 2 1/3 BO in 1 hr FU

1500' oil 2 hrs & AV. 13 Bopd

no/w 800' O.B. 3 hrs P.O.P

MAY 29 '56 P. 37 BO no/w 12 hrs

JUN 6 '56 CO 3760 500 &

& 4500 / 3 hrs NW POP JUN 13 '56

JUN 20 '56 JUN 27 '56 P. 51 BO no/w to

24 hrs JUL 3 '56 P. 25 Bopd
no/w to.

19-9-18W

SW NE NW