33-9-22W.

TYPE ★ AFFIDAVIT OF COMPLETION FORM ACO-1 WELL HISTORY

State Geological Survey
WICHITA BRANCH

SIDE ONE

Two (2) copies of this form shall be filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within thirty (30) days after the completion of a well, regardless of how the well was completed.

Attach separate letter of request if the information is to be held confidential. If confidential, only file one copy. Information on Side One will be of public record and Side Two will then be held confidential.

Applications must be made on dual completion, commingling, salt water disposal, injection and temporarily abandoned wells.

Attach one copy only wireline logs (i.e. electrical log, sonic log, gamma ray neutron log, etc.). (Rules 82-2-105 & 82-2-125) KCC# (316) 263-3238.

LICENSE # 5135 EXPIRATION DATE June 30, 1983

OPERATOR John O. Farmer, Inc. API NO. 15-065-21,672

ADDRESS P.O. Box 352 COUNTY Graham

Russell, KS 67665 FIELD Wildcat

** CONTACT PERSON Margaret A. Schulte PROD. FORMATION

PHONE (913) 483-3144

PURCHASER LEASE Loyd

ADDRESS WELL NO. #1

WELL LOCATION NW SW SE

DRILLING CONTRACTOR John O. Farmer, Inc. 330 Ft. from the west Line and

ADDRESS P.O. Box 352 990 Ft. from the south Line of


Russell, KS 67665 the SE/4 (Qtr.) SEC 33 TWP 9S RGE 22W.

PLUGGING CONTRACTOR John O. Farmer, Inc.

ADDRESS P.O. Box 352

Russell, KS 67665

WELL PLAT

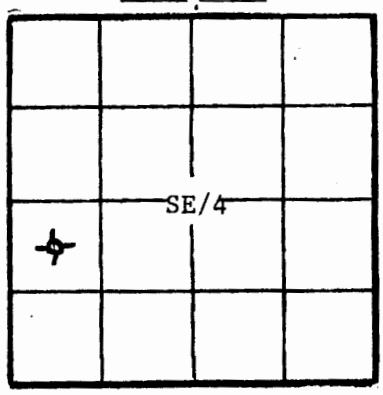

(Office Use Only)
KCC ✓
KGS
SWD/REP
PLG.

TOTAL DEPTH 3875' PBTD

SPUD DATE 9-11-82 DATE COMPLETED 9-17-82

ELEV: GR 2381' DF 2384' KB 2386'

DRILLED WITH (~~CABLE~~) (ROTARY) (~~AIR~~) TOOLS.

DOCKET NO. OF DISPOSAL OR REPRESSURING WELL BEING USED TO DISPOSE OF WATER FROM THIS LEASE .

Amount of surface pipe set and cemented 245' DV Tool Used? No .

THIS AFFIDAVIT APPLIES TO: (Circle ONE) - Oil, Gas, Shut-in Gas, (Dry), Disposal, Injection, Temporarily Abandoned, OWWO. Other .

ALL REQUIREMENTS OF THE STATUTES, RULES AND REGULATIONS PROMULGATED TO REGULATE THE OIL AND GAS INDUSTRY HAVE BEEN FULLY COMPLIED WITH.

A F F I D A V I T

John O. Farmer III , being of lawful age, hereby certifies that:

I am the Affiant, and I am familiar with the contents of the foregoing Affidavit. The statements and allegations contained therein are true and correct.

John O. Farmer III
(Name)

64629

SIDE TWO

ACO-1 WELL HISTORY

OPERATOR John O. Farmer, Inc. LEASE Loyd SEC. 33 TWP. 9S RGE. 22W

FILL IN WELL LOG AS REQUIRED:

Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.			SHOW GEOLOGICAL MARKERS, LOGS RUN, OR OTHER DESCRIPTIVE INFORMATION.	
FORMATION DESCRIPTION, CONTENTS, ETC.	TOP	BOTTOM	NAME	DEPTH
				Sample Tops
Sand & Shale	0	725		
Shale & Sand	725	1430		
Sand	1430	1640	Anhydrite	1910 (+476)
Red Bed	1640	1910	Heebner	3605 (-1215)
Anhydrite	1910	1945	Toronto	3630 (-1244)
Shale	1945	1980	Lansing	3641 (-1255)
Shale & Shells	1980	2340	B/KC	3870 (-1454)
Shale & Lime	2340	2542	T.D.	3875 (-1459)
Shale	2542	2700		
Shale & Shells	2700	2865		
Shale & Lime	2865	3600		
Lime	3600	3875		

Report of all strings set — surface, intermediate, production, etc. CASING RECORD (New) or (Used)

Purpose of string	Size hole drilled	Size casing set (in O.D.)	Weight lbs/ft.	Setting depth	Type cement	Sacks	Type and percent additives
Surface	12-1/4"	8-5/8"	24	251'	Common	150	3% C.C., 2% gel

LINER RECORD			PERFORATION RECORD		
Top, ft.	Bottom, ft.	Sacks cement	Shots per ft.	Size & type	Depth interval

TUBING RECORD					
Size	Setting depth	Packer set at			

ACID, FRACTURE, SHOT, CEMENT SQUEEZE RECORD