

KANSAS GEOLOGICAL SOCIETY
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
KANSAS GEOLOGICAL SOCIETY BUILDING
308 EAST MURDOCK - WICHITA, KANSAS

15-179-30081

COMPANY **OKMAR OIL**

SEC. 24 T. 9 R. 26W
 LOC. SE SE SE

FARM **Corke**

NO. 1

TOTAL DEPTH **4130**

COUNTY **Sheridan**
 KANSAS


COMM. **10-12-66**

COMP. **10-22-66**

SHOT OR TREATED

CONTRACTOR **Paine Drlg.**

ISSUED **2-11-67**

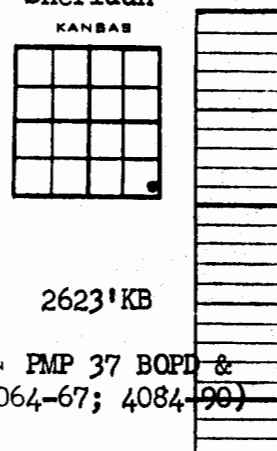

CASING

20 10
 15 7" @ 227' w/115sx
 12 6
 13 4 1/2" @ 4129' w/100 sx

ELEVATION **2623' KB**

PRODUCTION **PMP 37 BOPD &**
TW (LANS 4064-67; 4084-90)
GR 26

FIGURES INDICATE BOTTOM OF FORMATIONS

0	227	Sand & Shale		
227	620	Shale	TOPS: SCOUT	
620	1800	Sand & Shale	Anhydrite	2265
1800	1900	Shale	B/Anhydrite	2300
1900	2040	Sand & Red Bed	Heebner	3845
2040	2266	Shale	Toronto	3866
2266	2305	Anhydrite	Lansing	3886
2305	2640	Shale	*Base Kansas City	4114
2640	3275	Shale & Lime		
3275	3320	Lime		
3320	3575	Lime & Shale		
3575	4130	Lime		
4130		Rotary Total Depth		

Set 7 inch surface casing @ 227 ft. with 115 sx cement.

Set 4-1/2 inch production casing @ 4129 ft. with 100 sx cement.

We hereby certify that the above is a correct and accurate log of the above mentioned well, as shown on the daily drilling reports.

PAINE DRILLING CO., INC.

BY: *A. F. M. Keating*
 Treasurer

Subscribed and sworn to before me this 25th day of October, 1966.

My Commission Expires January 20, 1968

Carroll P. ...
 Notary Public