

**State Geological Survey  
WICHITA BRANCH**

*Incy*  
**6-9-28W** <sup>P1</sup>

TYPE

AFFIDAVIT OF COMPLETION FORM

ACO-1 WELL HISTORY

Compt. \_\_\_\_\_

SIDE ONE

(Rules 82-3-130 and 82-3-107)

DOCKET NO. NP \_\_\_\_\_

This form shall be filed with the Kansas Corporation Commission, 200 Colorado Derby Building, Wichita, Kansas 67202, within ninety (90) days after the completion of a well, regardless of how the well was completed.

FOR INFORMATION REGARDING THE NUMBER OF COPIES TO BE FILED AND APPLICATIONS REQUIRING COPIES OF ACO-1 FORMS SEE PAGE TWO (2), SIDE TWO (2) OF THIS FORM.

F \_\_\_\_\_ Letter requesting confidentiality attached.

C ☒ Attach ONE COPY of EACH wireline log run (i.e. electrical log, sonic log, gamma ray neutron log etc.)\*\*\*Check here if NO logs were run \_\_\_\_\_.

PLEASE FILL IN ALL INFORMATION. IF NOT AVAILABLE, INDICATE. IF INFORMATION LATER BECOMES AVAILABLE, SUBMIT BY LETTER.

LICENSE # 6113 EXPIRATION DATE 6-30-84

OPERATOR Landmark Oil Exploration, Inc. API NO. 15-179-20,724

ADDRESS 105 S. Broadway, Suite 1040 COUNTY Sheridan

Wichita, Kansas 67202 FIELD \_\_\_\_\_

\*\* CONTACT PERSON Mel Hussey PROD. FORMATION \_\_\_\_\_  
PHONE 316/265-8181 \_\_\_\_\_ Indicate if new pay.

PURCHASER \_\_\_\_\_ LEASE Clark

ADDRESS \_\_\_\_\_ WELL NO. 1-6

WELL LOCATION 200' E Ctr NE/4

DRILLING White & Ellis Drilling, Inc. 1320 Ft. from North Line and

CONTRACTOR 1220 Ft. from East Line of

ADDRESS 401 E. Douglas, Suite 500 the NE (Qtr.) SEC 6 TWP 9-S RGE 28 (W). <sup>(XX)</sup>

Wichita, Kansas 67202

PLUGGING White & Ellis Drilling, Inc. WELL PLAT (Office Use Only)

CONTRACTOR ADDRESS 401 E. Douglas, Suite 500

Wichita, Kansas 67202

TOTAL DEPTH 4050' PBDT \_\_\_\_\_

SPUD DATE 1-3-84 DATE COMPLETED 1-10-84

ELEV: GR 2689' DF \_\_\_\_\_ KB 2694'

DRILLED WITH ~~XXXXXX~~ (ROTARY) ~~XXXX~~ TOOLS.

DOCKET NO. OF DISPOSAL OR REPRESSURING WELL BEING USED TO DISPOSE OF WATER FROM THIS LEASE \_\_\_\_\_.

Amount of surface pipe set and cemented 249' DV Tool Used? No.


TYPE OF COMPLETION THIS AFFIDAVIT APPLIES TO: (Circle ONE) - Oil, Shut-in Gas, Gas, Dry, Disposal, Injection, Temporarily Abandoned. If OWWO, indicate type of re-completion \_\_\_\_\_. Other completion \_\_\_\_\_. NGPA filing \_\_\_\_\_.

ALL REQUIREMENTS OF THE STATUTES, RULES AND REGULATIONS PROMULGATED TO REGULATE THE OIL AND GAS INDUSTRY HAVE BEEN FULLY COMPLIED WITH.

A F F I D A V I T

Merlin C. Hussey, being of lawful age, hereby certifies that:

I am the Affiant, and I am familiar with the contents of the foregoing Affidavit. The statements and allegations contained therein are true and correct.

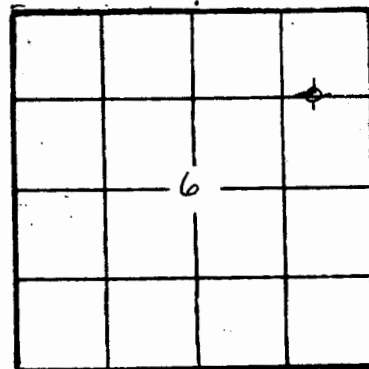

KCC \_\_\_\_\_  
KGS ☒  
SWD/REP \_\_\_\_\_  
PLG. \_\_\_\_\_  
NGPA \_\_\_\_\_

# State Geological Survey

WICHITA BRANCH

ACO-1 Well History

Side TWO

OPERATOR Landmark Oil Exploration LEASE NAME Clark SEC 6 TWP 9 S RGE 28 (W) ~~XXX~~

WELL NO 1-6

FILL IN WELL INFORMATION AS REQUIRED:

Show all important zones of porosity and contents thereof; cored intervals, and all drill-stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries.

Show Geological markers, logs run, or other Descriptive information.

Formation description, contents, etc.	Top	Bottom	Name	Depth
---------------------------------------	-----	--------	------	-------

Check if no Drill Stem Tests Run.

☒ Check if samples sent Geological Survey.

## LOG TOPS

Anhydrite	2309' (+385)
Heebner	3768' (-1074)
Toronto	3781' (-1097)
Lansing "A"	3803' (-1109)
Lansing "D"	3841' (-1147)
Lansing "H"	3933' (-1239)
Lansing "J"	3983' (-1289)
BKC	4050' (-1346)

DST #1 3790'-3836', 30-30-30-30.

Weak, steady blow throughout. Recovered 60' oil cut mud and 60' oil cut muddy water. IFP 54-65. FFP 87-87. ISIP 1052. FSIP 1041.

DST #2 3908'-3945', 30-60-30-60.

Weak, building to strong blow. Recovered 150' oil cut mud and 120' slightly oil cut muddy water. IFP 54-87. FFP 120-141. ISIP 1401. FSIP 1379.

If additional space is needed use Page 2

Report of all strings set — surface, intermediate, production, etc.

CASING RECORD (New) or (Used)

Purpose of string	Size hole drilled	Size casing set (in O.D.)	Weight lbs/ft.	Setting depth	Type cement	Sacks	Type and percent additives
Surface	12 1/4"	8 5/8"		256'	Class A	165	2% gel, 3% CaCl


## LINER RECORD

## PERFORATION RECORD

Top, ft.	Bottom, ft.	Sacks cement	Shots per ft.	Size & type	Depth interval

## TUBING RECORD

Size	Setting depth	Packer set at			



State Geological Survey  
WICHITA BRANCH

6-9-28W

P1  
Juch

WHITE

AND ELLIS DRILLING, Inc.

DRILLERS LOG

OPERATOR: Landmark Oil Exploration, Inc. 105 S. Broadway - Suite 1040 Wichita, Ks. 67202

CONTRACTOR: White & Ellis Drilling, Inc., 401 E. Douglas, Suite 500,  
Wichita, Ks. 67202

Lease Name Clark Well No. 1-6

Sec. 6 T. 9S R. 28W Spot SW SW NE

County Sheridan State Kansas Elevation

Casing Record:

Surface: 8 5/8" @ 256' with 165 sx. 3%cc  
2%gel

Production:  @  with  sx.

Type Well: D & A Total Depth 4050'

Drilling Commenced 1-3-84 Drilling Completed 1-10-84

Formation	From	To	Tops
Cellar	0	7	Anhydrite 2305
Sand, Shale	7	2404	
Lime, Shale	2404	2825	
Shale	2825	3187	
Lime, Shale	3187	4050	