

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-165-21668-00-01
Spot: SENW Sec/Twnshp/Rge: 3-16S-18W
3176 feet from S Section Line, 3424 feet from E Section Line
Lease/Unit Name: HERL TRUST Well Number: 1
County: RUSH Total Vertical Depth: 2110 feet

Operator License No.: 8507
Op Name: PAXCO, INC.
Address: 8920 PEPPERTREE CIRCLE
WICHITA, KS 67226

Production Casing Size: 5.5 feet: 2110 WITH 150 SX CMT
Surface Casing Size: 8.625 feet: 1114 WITH 400 SX CMT

#LOG⁵⁸

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 10/25/2003 9:00 AM
Plug Co. License No.: 32382 Plug Co. Name: SWIFT SERVICES, INC.
Proposal Rcvd. from: VINCENT WERTH, JR. Company: PAXCO INC Phone: (316) 634-1714

Proposed Plugging Method: PERFORATE & CIRCULATE CMT TO SURFACE.

Plugging Proposal Received By: RICHARD LACEY Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 10/25/2003 11:49 AM KCC Agent: RICHARD LACEY

Actual Plugging Report:


PBTD 1975'. ANHYDRITE @ 1100'. TOC @ 1720'. PERFORATED 5 1/2" AT 1150'. TOOK 400 PSIG TO START CIRCULATION. PUMPED 335 SX CMT DOWN 5 1/2" CIRCULATING CMT UP 8 5/8" X 5 1/2" ANNULUS TO SURFACE.

RECEIVED
NOV 06 2003
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY SWIFT SERVICES. NO CASING RECOVERED

Plugged through: CSG

District: 01

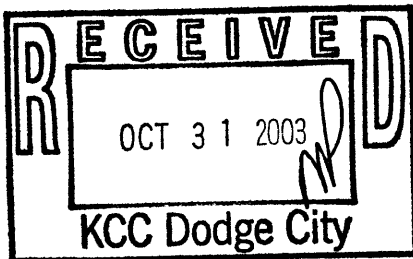

Signed

Richard M. Lacey

(TECHNICIAN)

INVOICE

DATE 11-6-03
INV. NO. 2004060745

Form CP-24