

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-175-21899-00-00
Spot: SESENW Sec/Twnshp/Rge: 13-32S-33W
2443 feet from N Section Line, 2336 feet from W Section Line
Lease/Unit Name: GREESON Well Number: 1
County: SEWARD Total Vertical Depth: 6165 feet

Operator License No.: 30604
Op Name: RAYDON EXPLORATION, INC.
Address: 9400 N. BROADWAY #400
OKLAHOMA CITY, OK 73114

Conductor Pipe Size: 20 feet: 40 5 YARDS 10 SX GROUT
Production Casing Size: 5.5 feet: 6161 WITH 390 SX CMT
Surface Casing Size: 8.625 feet: 1656 WITH 555 SX CMT
\$200 30

Well Type: DH UIC Docket No: _____ Date/Time to Plug: 10/31/2003 9:00 AM
Plug Co. License No.: 31151 Plug Co. Name: SARGENT AND HORTON PLUGGING, INC.
Proposal Rcvd. from: DON HORTON Company: SARGENT AND HORTON PLUGGI Phone: (580) 854-6515

Proposed Plugging Method: PUMP 200# HULLS & 25 SX CMT. PRESSURE TEST. PLUG AT 1675' WITH 50 SX CMT. PLUG AT 550' WITH 30 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: JIM HOLLAND Witness Type: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 10/31/2003 4:00 PM KCC Agent: JIM HOLLAND

Actual Plugging Report:


PBTD 6111'. PERFS AT 5652-55'. DV TOOL @ 2979' WITH 100 SX CMT. PUMP 200# HULLS & 25 SX CMT. DISPLACE TO BOTTOM WITH MUD. PRESSURE TO 500 PSIG & SHUT IN. 1ST PLUG PULL OUT OF HOLE TO 1675'. CIRCULATE HOLE WITH MUD & PUMP 50 SX CMT. GOOD CIRCULATION. 2ND PLUG PULL OUT OF HOLE TO 550'. LOAD HOLE & PUMP 30 SX CMT. GOOD CIRCULATION. 3RD PLUG PULL OUT OF HOLE TO 40'. LOAD HOLE & PUMP 10 SX CMT TO SURFACE.

RECEIVED
NOV 10 2003
KCC WICHITA

Remarks: USED COMMON CEMENT BY SARGENTS. RECOVERED 1937' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

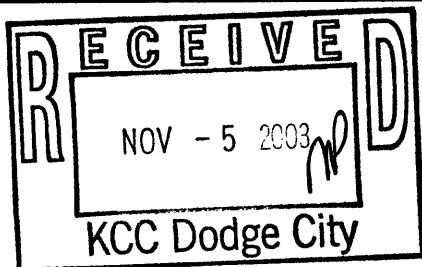

Signed

Jim Holland FRITH
(TECHNICIAN)

INVOICED
11-12-03
200406076 3

Form CS-2/3