

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
130 SOUTH MARKET, SUITE 2078  
WICHITA, KANSAS 67202

API Well Number: 15-185-21712-00-00  
Spot: NENESENE Sec/Twnshp/Rge: 5-22S-14W  
1350 feet from N Section Line, 300 feet from E Section Line  
Lease/Unit Name: ESTES Well Number: 6  
County: STAFFORD Total Vertical Depth: 3892 feet

Operator License No.: 5631  
Op Name: LOEWEN OPERATOR, INC.  
Address: PO BOX 335 208 S. MAIN  
CANTON, KS 67428

Production Casing Size: 5.5 feet: 3892 WITH 180 SX CMT  
Surface Casing Size: 8.625 feet: 320 WITH 200 SX CMT

#126<sup>49</sup>

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 11/10/2003 9:45 AM  
Plug Co. License No.: 31925 Plug Co. Name: QUALITY WELL SERVICE, INC.  
Proposal Rcvd. from: RICHARD MCINTYRE Company: QUALITY WELL SERVICE, INC. Phone: (620) 278-2026

Proposed Plugging Method: SAND TO 3501' & 5 SX CMT. PLUG AT 900' WITH 10 SX GEL & 50 SX CMT. PLUG AT 350' WITH 50 SX CMT. PLUG AT 40' WITH 10 SX CMT.

Plugging Proposal Received By: RICHARD LACEY WitnessType: Plugging Operations 100% Witnessed (Complete)  
Date/Time Plugging Completed: 11/10/2003 10:45 AM KCC Agent: STEVE PFEIFER

Actual Plugging Report:


PERFS AT 3562-65, 3585-88, 3632-34, & 3662-64'. SANDED BACK TO 3501' & PUT 5 SX CMT ON TOP OF SAND BRIDGE THROUGH DUMP BAILER. SPOT PLUGS THROUGH 5 1/2" CASING. 1ST PLUG AT 900' WITH 10 SX GEL & 50 SX CMT. 2ND PLUG AT 350' WITH 50 SX CMT W/4% CC. 3RD PLUG AT 40' WITH 10 SX CMT.

RECEIVED  
DEC 04 2003  
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY ALLIED. RECOVERED 2040' OF 5 1/2" CASING.

Plugged through: CSG

District: 01

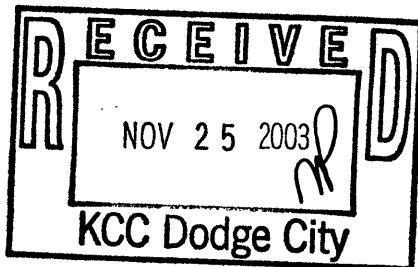

Signed

Stephen J. Pfeifer  
(TECHNICIAN)

INVOICED

DATE

12-8-03

INV. NO.

2004060859

Form C-3/3