
CNW SW

WELL PLUGGING RECORD STATE OF KANSAS API NUMBER 15-065- 302/0 K.A.R.-82-3-117 STATE CORPORATION COMMISSION LEASE NAME ROME UNIT KCC WIC 130 S. Market, Room 2078 WELL NUMBER #2-1 Wichita, KS 67202 TYPE OR PRINT 1980 Ft. from S Section Line **NOTICE:** Fill out <u>completely</u> and return to Cons. Div. 4620 Ft. from E Section Line office within 30 days SEC. 27 TWP. 9S RGE. 25W (E) or (W) LEASE OPERATOR Murfin Drilling Co., Inc. ADDRESS 250 N. Water, Suite 300; Wichita, KS 67202 COUNTY GRAHAM PHONE # () _______ OPERATORS LICENSE NO. ______ 30606 Date Well Completed __ Plugging commenced _____11/10/03 Character of WellOIL (Oil, Gas, D&A, SWD, Input, Water Supply Well) Plugging Completed _____11/10/03 The plugging proposal was approved on 11/10/03 (date) (KCC District Agent's Name). by Roger Moses @ KCC in Hays, KS. If not, is well log attached?_ Is ACO-1 filed? ____? Show Bottom 4052 TD4085' Producing Formation Lansing/Kansas City Depth to Top 4007 depth and thickness of all water oil and gas formations. CASING RECORD OIL, GAS, OR WATER RECORDS To Size Put In Pulled out Content From **Formation** 187 surface 187° 8 5/8 4 1/2 4084 4084' production Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from ____ feet to feet each set. Plugged well as follows Dug out 8 5/8" & dug wash up pit.:Perf 4 1/2" csg @ 2200' & 1375'. RIH w/2 3/8" mule shoe & tbg to 2307. Tied onto tbg.. Pumped 80 sxs SMD & 400# hulls.Pulled tbg to 1150'. Pumped 55 sxs SMD & 100# hulls. To circ cmt to surface. TOH w/tbg.Tied onto 4 1/2"csg. . Pumped 50 sxs SMD,. Max press 500#. ISIP 100#.. Tied onto 8 5/8". Pumped 55 sxs SMD & 100#hulls. Let set 1 hr. 4 1/2"csg full. 8 5/8" cmt 10' f/surface. Witnessed & approved by Roger Moses w/KCC @ Hays, KS. Name of Plugging Contractor Murfin Drilling Company, Inc. License No. 30606 250 N. Water, Suite 300; Wichita, KS 67202 NAME OF PARTY RESPONSIBLE FOR PLUGGING FEES: Murfin Drilling Company, Inc. COUNTY OF SEDGWICK STATE OF KANSAS Tom Nichols, Production Manager (Employee of Operator) or (Operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God. (Signature)


SUBSCRIBED AND SWORN TO before me this 1 12th day of .November, 2003

Notary Public - Barbara J. Dodson

My Commission Expires: 12/16/03 Form CP-4 Revised 05-88



(Address) Wichita, KS

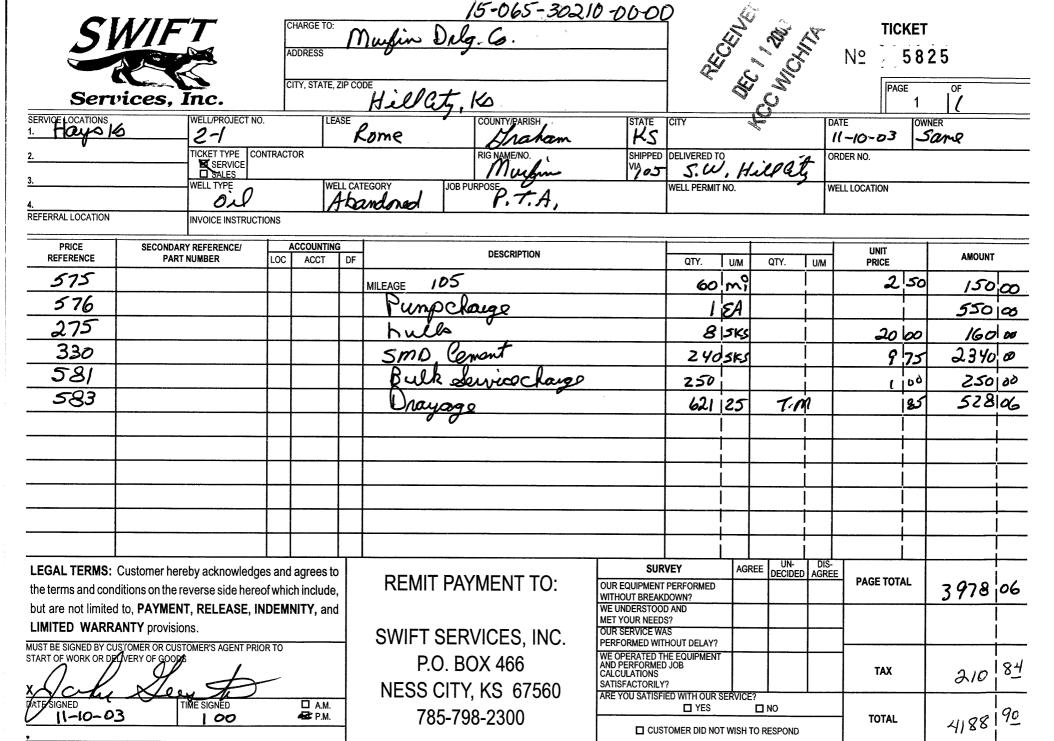

CUSTOMER ACCEPTANCE OF MATERIALS AND SERVICES The customer hereby acknowledges receipt of the materials and services listed on this ticket.

SWIFT OPERATOR

APPROVAL

Thank You!

SWIFT Services, Inc. 15-065-30210-00-00

[DATE 11-10-03] PAGENO. JOB·LOG * JOB TYPE CUSTOMER WELL NO. TICKET NO. 5825 PUMPS PRESSURE (PSI) RATE (BPM) VOLUME (BBL) (GAL) TIME **DESCRIPTION OF OPERATION AND MATERIALS** T C TUBING CASING 1330 on Loc open end Tbg at 2307 Pump 80 SKS SMD CMT W/ 400 # hulls
Pull They To 1150 Pump 53 SKS SMD
W/ 100 # hulls CMT CITC To Surface
Pull They out of hole
hook up To 41/2 + Pump 50 SKS CMT
400 Max PSI 500 1345 5 45BBK 80 55 1355 30 BBC 278BZ 50 150 shut in 41/2 300 hookup to 85/8 Pump 55 SKS CMT W/100thall 30BBC Max P3= 300 1530 shut in 8 5/8 wait IHR & Top of well if needer 41/2 full 85/8 10-15' Down Job Complete 1630 4/2 185 SKSCMT 500# hulls 85/8 55 SKSCMT 100 # hulls 240 SKS CONT TOTAL 600# hulls RECEIVED DEC 1 1 2003 KCC WICHITA