

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
130 SOUTH MARKET, SUITE 2078
WICHITA, KANSAS 67202

API Well Number: 15-093-20009-00-00
Spot: N2N2SE Sec/Twnshp/Rge: 23-22S-38W
1980 feet from S Section Line, 3880 feet from W Section Line
Lease/Unit Name: PATTERSON GATES O Well Number: 3
County: KEARNY Total Vertical Depth: 4970 feet

Operator License No.: 5952
Op Name: BP AMERICA PRODUCTION COMPANY
Address: 2225 WEST OKLAHOMA AVENUE
ULYSSES, KS 67880

Production Casing Size: 5.5 feet: 4970 350 SX CMT
Surface Casing Size: 8.625 feet: 1020 750 SX CMT
#16153

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 12/11/2003 9:00 AM
Plug Co. License No.: 99997 Plug Co. Name: HALLIBURTON ENERGY SERVICES
Proposal Rcvd. from: JOE EUDEY Company: BP AMERICA Phone: (316) 356-6955

Proposed Plugging Method: CIBP @ 3825' & 2 SX CMT. PERFORATE AT 1020'. CIRCULATE CMT TO SURFACE INSIDE & OUT. CHECK BACKSIDE.

Plugging Proposal Received By: KEVIN STRUBE WitnessType: Plugging Operations 100% Witnessed (Complete)
Date/Time Plugging Completed: 12/11/2003 11:00 AM KCC Agent: KEVIN STRUBE

Actual Plugging Report:


PBTD 4936'. PERFS AT 3878-4256'. CIBP @ 4860' & 4490'. CIBP @ 3800' WITH 2 SX CMT. PRESSURED UP TO 1000#. PERFORATE 5 1/2" @ 1020'. PUMPED 263 SX CMT. CIRCULATED CMT TO SURFACE.

RECEIVED
DEC 29 2003
KCC WICHITA

Remarks: USED 60/40 POZMIX 6% GEL BY HALLIBURTON. NO CASING RECOVERED.

Plugged through: CSG

District: 01

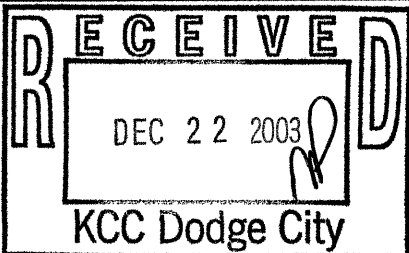

Signed

Kevin D Strube

(TECHNICIAN)

INVOICED

DATE

12-29-03

INV. NO.

2004060998

Form C-213